MIL-H-36376B
17 August 1978
SUPERSEDING
MIL-H-36376A
16 September 1971
MIL-H-36376
4 February 1965

MILITARY SPECIFICATION

HOLDERS, MICROPOROUS FILTERING DISK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers glass microporous filter disk holders.

1.2 Classification. The filter holders shall be of the following types, as specified.

Type I - With rubber stopper and without flask.
Type II - With ground glass joint and flask.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

DD-G-541	- Glass (Laboratory).
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Fiberboard.
PPP- B-676	- Boxes, Set-Up, Paperboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 So. 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-10547 - Liners, Case and Sheet, Overwrap; Water-Vaporproof, or Waterproof, Flexible.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposals shall apply.

U.S. DEPARTMENT OF COMMERCE - NATIONAL BUREAU OF STANDARDS

Commercial Standard CS21-58 - Interchangeable Taper-Ground Joints Stopcocks, Stoppers and Spherical-Ground Joints.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Price may be obtained from the Superintendent of Documents).

3. REQUIREMENTS

3.1 Material. Material shall be suitable for the purpose intended and as specified herein.

3.1.1 Glass. Glass shall conform to type I, class A or B of DD-G-541.

* 3.1.2 Rubber. Rubber shall be a properly vulcanized, natural or synthetic rubber, or a mixture of natural and synthetic rubber.

* 3.2 Construction. The style, design and dimensions of type I and type II holders shall conform to the applicable portions of Figure 1. Type I holder shall consist of a bowl, clamp and base. Type II holder shall consist of a bowl, clamp, base and flask. For type II, the juncture between the base and the flask shall be a ground glass joint, 40/35 taper, conforming to Commercial Standard CS21-58.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

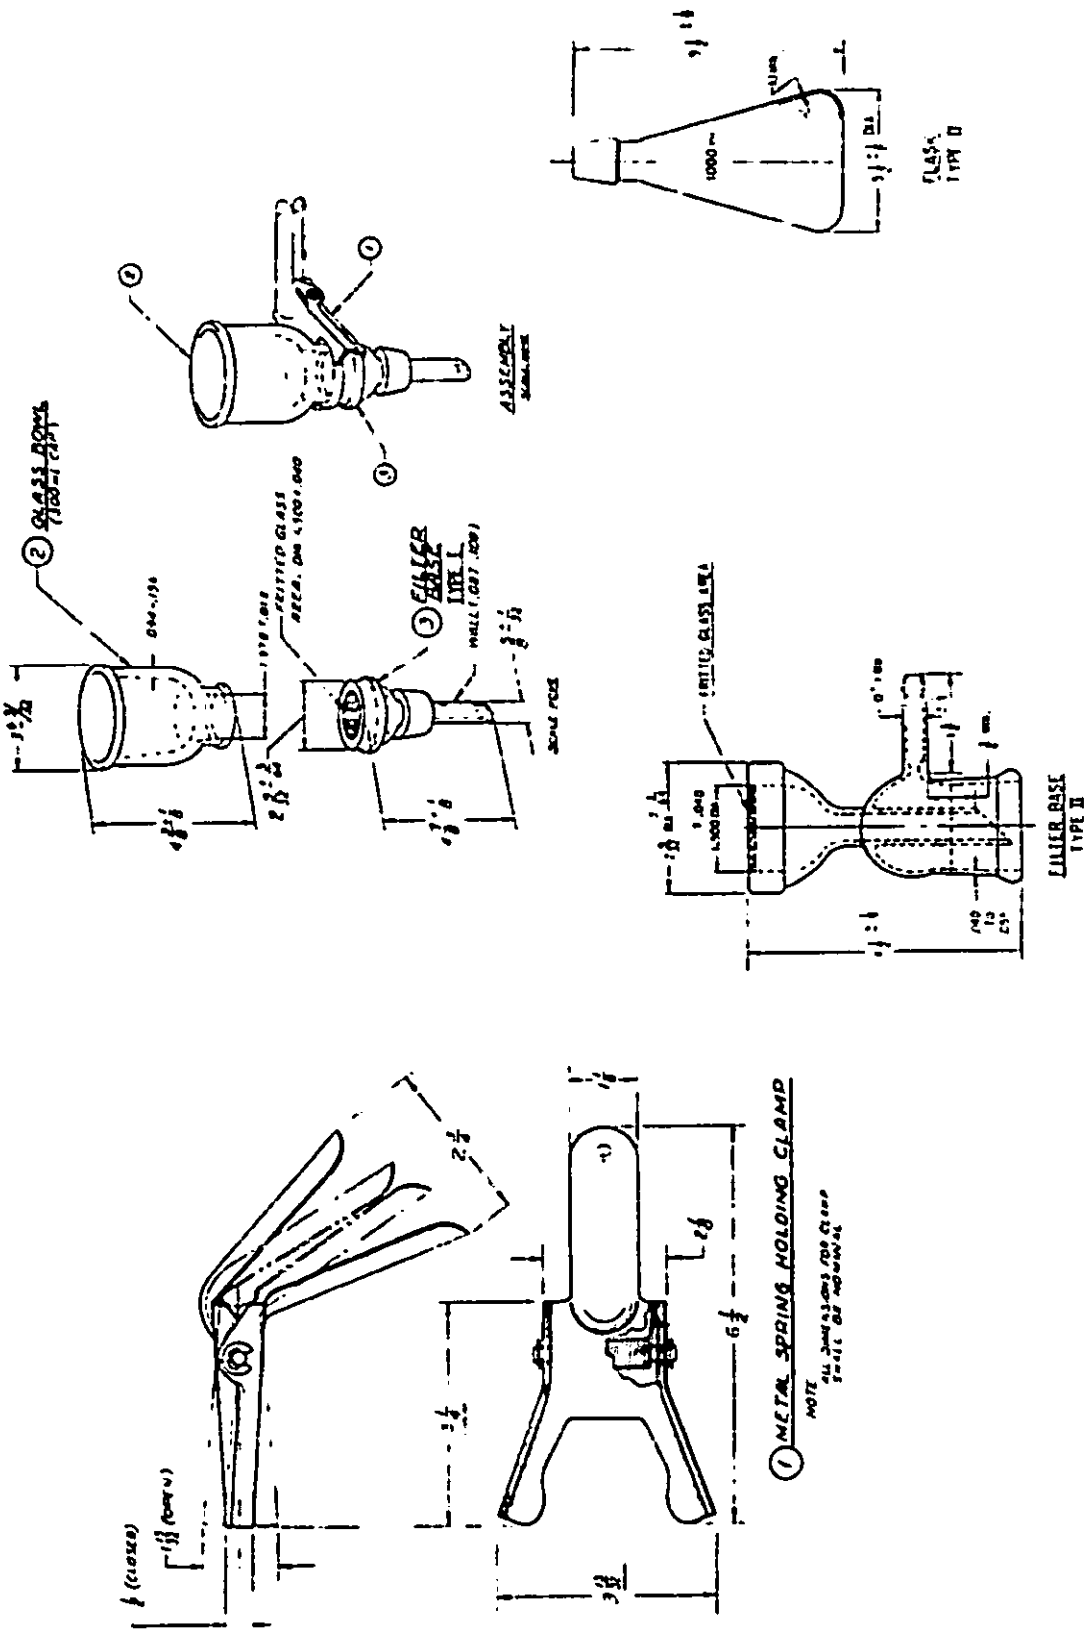


FIGURE 1. Holders, Microporous Filtering Disk.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

* 3.2.1 Bowl. The bowl shall be fabricated of glass and shall mate with the filter base. Bowl shall have a capacity of 300 ml.

3.2.2 Base. Base shall be glass and shall have a fritted area for passage of filtrate.

* 3.2.2.1 Type I. Stem of base shall be provided with a rubber stopper, 41 mm. top diameter, 33 mm. bottom diameter and 25 mm. long. One 14 mm. diameter perforation shall be provided in stopper.

3.2.2.2 Type II. Stem of base shall have the female portion of the ground glass joint and shall have a tube protruding from the side. Tube shall be capable of being used for connection to the vacuum source by rubber or plastic tubing.

* 3.2.3 Clamp. The clamp shall be fabricated of anodized aluminum except for the spring which shall be corrosion-resistant steel. Clamp shall be so constructed that it is capable of securing the bowl to the base without external pressure being applied to the clamp, and clamp shall be easily opened for removal from the bowl and base.

3.2.4 Flask.

3.2.4.1 Type II. Type II holder shall be provided with a one-liter, heavy-walled, glass filter flask. Top of the flask shall have the male portion of the ground glass joint.

3.3 Leakage. Exterior of junction between bowl and base shall show no evidence of moisture when tested as specified (see 4.4.1).

3.4 Workmanship. Workmanship shall be first class throughout. Microporous filtering disk holders shall be free from defects which detract from their appearance or impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, or auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

* 4.1.3 Certificate of quality. Certificate of quality, supplied by the manufacturer of the glass and rubber stoppers, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

* 4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I. Unit of product for sampling purposes shall be one holder, microporous filtering disk.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	2.5
Minor defects	II	4.0
For dimensional examination	S-1	2.5

* 4.2.2 For tests. Sampling for tests shall be conducted in accordance with table II and MIL-STD-105, inspection level S-2. Acceptance number shall be zero. Unit of product for sampling purposes shall be one holder, microporous filtering disk.

TABLE II. Sampling for tests.

Characteristic	Requirement	Test procedure
Leakage	3.3	4.4.1

* 4.3 Examination. The holders shall be examined to determine compliance with all requirements contained in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

* 4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed in table III.

TABLE III. Classification of defects.

Categories	Defects
Major	
101	Component part missing.
102	Holder not free of sharp edges.
103	Holder not free of cracks.
104	Holder not free of chips.
105	Holder not free of deformity.
Minor	
201	Holder not free of scratches.
202	Holder not free of dirt or foreign material.

* 4.3.2 Dimensions examination. The holders shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

* 4.3.3 Packaging inspection. The inspection of the unit packaging, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Leakage. Assemble unit with a membrane disk (see 6.2) in place between the bowl and base and with the clamp so positioned that it secures the bowl to the base. Pour 250 + milliliters (ml.) of water into the bowl and allow the unit to stand for 15 + 1 minute. Evidence of moisture at the exterior junction of the bowl and base shall be considered failure to meet the requirements of 3.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.3).

* 5.1.1 Level A.

* 5.1.1.1 Unit package. The glass bowl and filter base shall be individually packaged in boxes of appropriate size constructed in accordance with PPP-B-676, type I, except that commercial colors are acceptable. Boxes shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to, the contents. The glass bowl and filter base along with the clamp shall be further packaged in a box of appropriate size constructed in accordance with PPP-B-636, type

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

CF, class domestic. The box shall contain sufficient cushioning material to prevent shifting of contents. Closure shall be as specified in the appendix of the box specification.

* 5.1.2 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.3).

5.2.1 Level A.

* 5.2.1.1 Exterior container. Forty-eight (48) holders shall be packed into a exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

* 5.2.1.2. Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard boxes shall be waterproofed in accordance with PPP-B-636.

5.2.2 Level B.

* 5.2.2.1 Exterior container. Forty-eight (48) holders shall be packed into a exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

* 5.3 Marking. Each unit package and exterior container shall be marked as specified in MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Subject holders are for use with membrane disks which have a diameter of 47 mm.

6.2 Membrane disk referred to in 4.4.1 is National Stock Number 6640-00-299-8692, Disk, Filtering, Microporous, 47 mm. Diameter, 100s. Commercial filter furnished for NSN 6640-00-299-8692 may be used for the test in 4.4.1.

* 6.3 Ordering data. Procurement documents should specify the following.

(a) Title, number and date of this specification.
(b) National Stock Number (NSN).
(c) Specify type holder required (see 1.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.4 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

* 6.5 This specification covers the following items appearing in the Federal Supply Catalog.

National Stock Number	Item Identification
6640-00-299-8691	HOLDER, MICROPOROUS FILTERING DISK
6640-00-829-5814	HOLDER, MICROPOROUS FILTERING DISK

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activity:
DoD - MB

Preparing activity:
Defense Logistics Agency - DM

Project Number 6640-1058

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE
MIL-H-36376B HOLDERS, MICROPOROUS FILTERING DISK

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:29Z
Check the source to verify that this is the current version before use.