MIL-P-46289A (MU)
13 March 1964
SUPERSEDING
MIL-P-46289 (Ord)
21 September 1960

MILITARY SPECIFICATION

PRIMER, PERCUSSION, M96
LOADING, ASSEMBLING AND PACKING

1. SCOPE

1.1 This specification covers the loading, assembling and packing for one type primer designated as Primer, Percussion, M96.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116 - Preservation, Methods of
MIL-P-223 - Powder, Black
MIL-A-2550 - Ammunition and Special Weapons; General Specification for
MIL-I-45208 - Inspection Requirements, General Specification for
MIL-I-45607 - Inspection Equipment, Supply and Maintenance of
MIL-P-20449 - Primer, Percussion, M61, Loading, Assembling and Packing

STANDARDS

MILITARY

MIL-STD-105D - Sampling Procedures and Tables for Inspection by Attributes.

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

DRAWINGS

ORDNANCE CORPS

8837988 - Primer, Percussion, M96, Loading Assembly
8798680 - Carton, Packing, Ammunition; For Primer, Percussion M96
8798681 - Box, Packing, Ammunition, For Pimer, Percussion, M96

PUBLICATIONS

ORDNANCE CORPS

IEL-8837988 - Index of Inspection Equipment Lists

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Material.-Materials shall be in accordance with applicable drawings and specifications.

3.2 Percussion primer.-The percussion primer shall comply with all requirements specified on Drawing (dwg.) 8837988, and with all requirements specified in applicable specifications.

3.3 Primer assembly without black powder charge.

3.3.1 Non-functioning.-The primers shall not function under an applied energy value of 47.52 inch ounces, minimum (min.), when tested as specified in 4.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

3.3.2 Functioning.-The primers shall function under an applied energy value of 159.20 inch ounces, maximum (max.), when tested as specified in 4.3.1.2.

3.4 Primer assembly with black powder charge

3.4.1 Functioning.-If the percussion element fires, the primer assemblies shall function without audible hangfire, when tested as specified in 4.3.2.

3.4.2 Pressure resistance.-The primer assemblies shall withstand a pressure of 40,000 plus or minus 4,000 pounds per square inch without evidence of rupture, or any of the primer becoming detached, when tested as specified in 4.3.2.

3.5 Moisture content of black powder.-The moisture content of the black powder at the loading station at the time of loading shall not exceed 0.5 percent, when tested as specified in 4.3.3.

3.6 Workmanship.-All parts shall be free of burrs, dirt, chips, grease, rust, cracks, corrosion and other foreign material. The cleaning method shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.-Unless otherwise specified in the contract or purchase order the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define terms used herein. The provisions of Specification MIL-A-2550 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.1.1 Contractor quality assurance system.-The contractor shall provide and maintain an effective quality assurance system in compliance with the requirements of Specification MIL-I-45208. The contractor's quality assurance system shall contain a procedure for the reporting of critical defectives found during the course of his inspection and during inspection by the Government. Any critical defect encountered, unless annotated by an asterisk (*) to the right of the characteristic code number (see 6.2), will be reported within 48 hours. A monthly summary report covering those critical defects annotated by an asterisk will be furnished. The agencies to whom the reports will be furnished are identified in paragraph 6.6. The reports shall contain, as a minimum, the following information:

a. Contractor and contract number.
b. Number and revision date of specification.
c. Characteristic code number.
d. Lot or serial number.
e. Number of defectives found.
f. Assignable cause or analysis of occurrence.
g. Corrective action taken or recommended. When the corrective action is beyond the control of the contractor or the scope of the contract, the report shall contain the contractor's recommendation to the Government.

4.1.2 Submission of product.-At the time the completed lot of product is submitted to the Government for acceptance the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all quality assurance provisions of the approved current written description of the system.
b. Number of units of product inspected.
c. Results obtained for all inspection performed.
d. Drawing, specification number and date, together with an identification and date of changes.
e. Certificates of analysis on all material purchased by the contractor when such material is controlled by Government specifications referenced in any of the contractual documents.
f. Number of items in the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

g. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.1.3 Government verification.-Using the contractor's written quality assurance procedure, this detail specification, the applicable drawings and other contractual documents as a guide, the Government inspector shall verify at unscheduled intervals all quality assurance operations performed by the contractor. Verification will be in accordance with Specification MIL-I-45208 and will be performed to the extent necessary to assure compliance with the contractual requirements. Severity of Government inspection of individual characteristics will be directly related to the seriousness of the classification assigned. In no instance will a characteristic classified "critical" be accepted solely on the basis of the contractor's records.

4.2 Inspection provisions

4.2.1 Lot formation.-A lot shall consist of loaded percussion primers produced by one manufacturer, in one unchanged process, in accordance with the same drawing, same drawing revision, same specification, and same specification revision. Drawing, specification and process changes not affecting performance, safety, or fit, as determined by the Government, shall not be cause for changing the lot number. Product shall be submitted for inspection in accordance with Standard MIL-STD-105D (or Standard MIL-STD-1235, when applicable). Each lot shall contain:

a. Metal parts of one lot interfix number from one manufacturer.

b. Black powder of one lot number from one manufacturer.

c. Primer, percussion, M61 (hereafter referred to as percussion elements) of one lot interfix number from one manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.2.2 Examination.-Inspection for Critical defects shall be 100 percent. Sampling plans and procedures for Major and Minor defects shall be in accordance with Standard MIL-STD-105D except that continuous sampling plans in accordance with Standard MIL-STD-1235 may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to individual characteristics listed using an AQL of 0.40 percent for each minor defect and an AQL of 0.25 percent for each major defect. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.2.4.

4.2.2.1 Assembly, prior to assembling element in head (see dwg. 8837988).

Categories	Defects	Method of Inspection	Code No. (see 6.2)
Critical:			
1.	Any flash hole missing from body	Gage	*01001
Major:	AQL 0.25 percent		
101.	Flash hole in head completely obstructed	Visual	01002
Minor:	None defined		

4.2.2.2 Assembly, prior to assembling battery cup and firing plug in head (see dwg. 8837988).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		
Major:	AQL 0.25 percent		
101.	Percussion element missing, cocked or inverted	Visual	02001

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

Minor:	AQL 1.0 percent		
201.	Seal between element and head missing or incomplete.....	Visual	02002
202.	Evidence of poor workmanship (see 3.6).....	Visual	02003

4.2.2.3 Assembly prior to assembling of liner body (see dwg. 8837988).

Categories	Defects	Method of Inspection	Code No.
Critical:			
1.	Firing plug or battery cup above flush with surface of head.....	Gage	*03001
Major:	AQL 0.25 percent		
101.	Battery cup loose.....	Manual	03002
102.	Firing plug missing or inverted.....	Visual	03003
Minor:	AQL 0.40 percent		
201.	Evidence of poor workmanship (see 3.6).....	Visual	03004

4.2.2.4 Assembly prior to assembly of diaphragm (see dwg. 8837988).

Categories	Defects	Method of Inspection	Code No.
Critical: None defined			
Major:	AQL 0.25 percent		
101.	Liner fails to cover all holes....	Visual	04001
102.	Any flash hole not completely sealed.....	Visual	04002
Minor:	AQL 0.40 percent		
201.	Foreign matter in charge.....	Visual	04003

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.2.2.5 Assembly (see dwg. 8837988).

Categories	Defects	Method of Inspection	Code No.
Critical: None defined			
Major:	AQL 0.40 percent		
101.	Weight of charge	Balance	05001
*102.	Sealant of diaphragm missing or inadequate	Visual	05002
103.	Diaphragm punctured or improperly assembled	Visual	05003
104.	Case thread damaged	Visual-Gage	05004
Minor:	AQL 2.50 percent		
201.	Total length, max	Gage	05005
202.	Marking misleading or unidentifiable	Visual	05006
203.	Diameter of flange, max	Gage	05007
204.	Head assembled to wrong end of primer body	Visual	05008
205.	Evidence of poor workmanship (see 3.6)	Visual	05009

*Sketches 1, 2 and 3 on Figure 1 indicate acceptable primers. Furthermore, a primer with holes displaying the conditions 4, 5 and 6 may be classed acceptable provided that the visible liner is thoroughly impregnated with paint or lacquer and not more than 20 percent of the holes have this condition.

4.2.2.6 Carton, prior to sealing (see dwg. 8798680).

Categories	Defects	Method of Inspection	Code No.
Critical: None defined			
Major: None defined			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

Minor:	AQL 1.50 percent		
201.	Any packing material missing.....	Visual	06001
202.	Separators damaged to the extent that primers touch each other.....	Visual	06002
203.	Primer missing.....	Visual	06003

4.2.2.7 Carton, sealed (see dwg. 8798680).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		
Major:	AQL 0.40 percent		
101.	Sealing strip torn, badly wrinkled, incomplete or otherwise fails to seal box completely.....	Visual	07001
102.	Carton torn, cut or punctured.....	Visual	07002
103.	Contents loose.....	Manual	07003
Minor:	None defined		

4.2.2.8 Sealed barrier bag (see dwg. 8798680).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		
Major:	AQL 0.25 percent		
101.	Seal improper or incomplete.....	Visual	08001
102.	Bag punctured, torn or cut.....	Visual	08002
Minor:	None defined		

4.2.2.9 Packing box, prior to sealing (see dwg. 8798681).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method of Inspection	Code No.
Major:	AQL 0.25 percent		
101.	Carton missing	Visual	09001
Minor:	None defined		

4.2.2.10 Packing box, sealed (see dwg. 8798681).

Categories	Defects	Method of Inspection	Code No.
Critical:	None defined		
Major:	AQL 0.40 percent		
101.	Box broken, board loose, or protruding nail	Visual	10001
102.	Strapping missing, broken or loose	Visual-Manual	10002
103.	Cover improperly assembled	Visual	10003
Minor:	AQL 1.50 percent		
201.	Marking misleading or unidentifiable	Visual	10004
202.	Strapping improperly engaged or mislocated	Visual	10005
203.	Contents loose	Manual	10006

4.2.3 Testing

4.2.3.1 Primer assembly without black powder charge.

4.2.3.1.1 Non-functioning (see 3.3.1) Critical defect *Code No. 03005.

4.2.3.1.1.1 Beginning with the first lot produced, and continuing until three consecutive lots have complied with the acceptance criteria specified, a sample of 150 assemblies shall be randomly selected from each lot for the test. If any sample fails to comply with requirement the lot shall be rejected. The test shall be performed as specified in 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.2.3.1.1.2 After three consecutive lots have met the criteria of 4.2.3.1.1.1, a sample of 50 assemblies shall be randomly selected from each lot for this test. If one or more primers fails to comply with the applicable requirement, the lot shall be rejected. The test shall be performed as specified in 4.3 using equipment in accordance with 4.2.4. Primers subjected to this test shall be destroyed.

4.2.3.1.2 Functioning (see 3.3.2) Major defect - Code No. 03006.

4.2.3.1.2.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the applicable requirements specified two hundred and fifty samples shall be randomly selected from each lot for this test. If three or more primers fails to comply with the applicable requirements, the lot shall be rejected. If one or two defects are found, a second sample of five hundred primers shall be tested. If the combined number of defectives in both the first and second sample is three or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2 using equipment in accordance with 4.2.4.

4.2.3.1.2.2 After three consecutive lots have met the criteria of 4.2.3.1.2.1, a sample of 125 primers shall be randomly selected from each lot for this test. If two or more primers fails to comply with the applicable requirement, the lot shall be rejected. If only one defect is found, a second sample of 250 primers shall be tested. If the combined number of defectives in both the first and second sample is two or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2 using equipment in accordance with 4.2.4.

4.2.3.2 Primer assembly functioning (see 3.5) Major defect - Code No. 05010.-Twenty-five samples shall be randomly selected from each lot for this test. If one or more assemblies fails to comply with the requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.2.

4.2.3.3 Check test for deterioration of the primer element.- If the total elapsed time between original acceptance of the primer element lot and the assembly of that lot into the M96 primer exceeds two years, or if the primer elements have been subjected to adverse conditions for any period of time since previous test, the primer element lot shall be subjected to and must satisfactorily

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

pass the check test for deterioration specified in the applicable specification immediately before the primer lot is assembled into the M96 primers (see 6.4).

4.2.3.4 Moisture content of black powder (see 3.5) Major defect - Code No. 11001.-The contractor shall provide adequate controls to assure the compliance of each lot with the applicable requirement. For verification, and just prior to start of each eight hours loading production, the contractor shall test one sample of powder selected from that quantity, or sub lot of powder that will be used in the eight hour loading production of primer assemblies. Composite samples shall not be used. If the moisture content of the samples exceeds the requirement, and loading has not begun, that sub-lot of powder represented by the sample shall be rejected. If powder from a sub-lot with excessive moisture has been used in loading the remaining unloaded powder and all assemblies containing the non-conforming powder shall be rejected.

4.2.3.5 Heat seal test of sealed bag (see dwg. 8798680) Major defect - Code No. 11002.-Sampling plans, acceptance criteria and test procedures for this test shall be as specified in Specification MIL-P-116.

4.2.4 Inspection Equipment.-Index of Inspection Equipment Lists Number IEL 8837988 identifies the inspection equipment required to perform the examinations and tests prescribed in this section. The contractor shall design inspection equipment in accordance with the instructions in paragraph 6.3.

4.2.4.1 Government rights to documentation.-Inspection equipment drawings and lists provided and revised in accordance with the requirements of the IEL may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of equipment, construction, survey and whenever inspection equipment drawings are needed.

4.2.4.2 Supply and maintenance.-Supply and maintenance of the equipment listed on the IEL shall be in accordance with Specification MIL-I-45607.

4.2.4.3 Government use of contractor's inspection and test equipment.-The contractor shall make available to the Government all inspection and test equipment necessary for determining conformance with contract requirements. Personnel

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

for operating the equipment, and verification of its accuracy, shall be supplied by the contractor for the performance of examination or test by the Government.

4.3 Test methods and procedures

4.3.1 Primer assembly without black powder charge.

4.3.1.1 Non-functioning.-The assemblies less the black powder shall be assembled into the test fixture (see 4.2.4). A steel ball weighing a minimum of 7.92 ounces shall be dropped from a height to give the required impact force (approximately 6 inches).

4.3.1.2 Functioning.-The test shall be performed as specified in 4.3.1.1 except that the weight of the ball shall be 7.96 ounces, maximum and the height shall be adjusted to give the required impact force (approximately 20 inches).

4.3.2 Primer assembly and pressure resistance.-The loaded primer assemblies shall be assembled into the test fixture (see 4.2.4). The fixture shall be activated and observation shall be made for firing and audible hangfire. Upon completion of firing the primer shall be removed and observation shall be made for ruptured and broken or detached parts.

4.3.3 Moisture content of black powder.-The moisture content shall be determined in accordance with Specification MIL-P-223.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Level C.-The primers shall be preserved and packaged in accordance with dwg. 8798680.

5.2 Packing

5.2.1 Level C.-The cartons shall be packed in accordance with dwg. 8798681.

5.3 Marking.-The marking shall be in accordance with dwgs. 8798680 and 8798681.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

5.4 Data cards.-Data card information shall be as specified in Specification MIL-A-2550.

6. NOTES

6.1 Ordering data.-Procurement documents shall specify the following:

a. Title, number and date of this specification.

6.2 Inspection code numbers.-The five digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government.

6.3 Inspection equipment.-The contractor shall design inspection equipment as required by the referenced Inspection Equipment Lists (IEL) in accordance with the instructions of 6.3.1 through 6.3.7.

6.3.1 Inspection Equipment Lists.-Inspection Equipment Lists indicate the availability of inspection equipment designs by showing in the "number" column of the list of inspection equipment (OO Form 1242-3) the numbers of drawings of existing equipment designs or codes as indicated in 6.3.2. Design action required of the contractor with respect to the different types of drawings that may be listed is described in 6.3.3 and 6.3.4. Action required by the contractor with respect to commercial inspection equipment is described in 6.3.5. The contractor will be required to prepare detailed drawings in accordance with 6.3.6 for all the equipment coded as "contractor design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.7.

6.3.2 Inspection Equipment List codes.-The inspection equipment as defined in 6.3.3, 6.3.4, 6.3.5, and 6.3.6 will be designated in the Inspection Equipment List by the following codes:

CDOF - Contractor's design responsibility on Ordnance format; ORDM-608-12.
CDCF - Contractor's design responsibility on contractor format.
OD - Ordnance design.
ODMU - Ordnance design, mandatory for use.
CE - Commercial equipment.
SCD - Specification control Drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

6.3.3 Ordnance designs.-Ordnance designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of inspection equipment. The contractor need provide no design when an Ordnance design is listed for an item of inspection equipment. Ordnance designs fall into two basic classifications; mandatory and non-mandatory. When an Inspection Equipment List references mandatory Ordnance designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with non-mandatory designs and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor prepared designs or commercial equipment selections must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.7.

6.3.4 Specification control drawings.-Specification control drawings depict the minimum equipment requirements in outline, descriptive, diagrammatic, or pictorial form only and specify the required performance or other characteristics. Contractors must prepare detailed drawings (see 6.3.6) of their designs in support of specification control drawings. These contractor prepared designs must be approved by the Government prior to the fabrication or procuring of the equipment. Commercial equipment meeting the requirements of specification control drawings may be approved if described in sufficient detail to permit identification and evaluation by the Government. Designs shall be submitted for approval as specified in 6.3.7.

6.3.5 Commercial equipment.-Commercial equipment is inspection equipment that has universal application for a specific function. It is comprised of items commonly used by industry and government. Contractors are not required to furnish drawings of commercial inspection equipment but a list of such equipment must be approved by the Government. Lists shall be submitted for approval to the inspection element of the agency administering the contract.

6.3.6 Contractor designs.-Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

supported by detailed drawings which depict all information necessary to completely fabricate, calibrate and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarification will not be required. Contractor designs identified as CDCF may be developed on the format the contractor normally employs in his equipment design procedure provided such format reflects the detail and information specified above. Contractor designs identified as CDOF shall comply with the format and requirements of ORDM 608-12, and, in addition, contain the detail and information specified above.

6.3.7 Submission of contractor designs.-Designs shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-ND. Design review will normally be accomplished within one month after receipt by Picatinny Arsenal. Partial submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for design review will be based on the date of the final submission of designs.

6.4 Cost of check tests.-The contracting officer will arrange for the contractor to be reimbursed for the expense incurred in the performance of the check test. The test shall be conducted at Government expense without cost to the contractor who loaded this M61 primer or the contractor loading and assembling the M96 primer, and shall not constitute a bsis for rejection against either contractor, except where deterioration has occurred as a direct result of carelessness in handling, storage, etc, while the primers were under the jurisdiction of either contractor.

6.5 Check test for possible deterioration of percussion artillery primers.-The following tests are designed to prevent the loading of artillery primers which have deteriorated, into a major ammunition item. The test shall be performed on artillery primers from each lot which has been stored under normal conditions for more than two years or under adverse conditions for any period of time. If the specification for the ammunition item into which the artillery primers are loaded does not require that the check test be performed, the contracting officer should insert a provision for the performance of the check tests in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

6.5.1 Primer assembly without black powder charge.

6.5.1.1 Non-functioning (see 3.3.1).-The sampling plan for this test shall be in accordance with Table I. Any artillery primer which fails to comply with the applicable requirement shall be classified defective. The test shall be performed as specified in 4.3.1.1. Removal of the black powder charge shall be accomplished, prior to testing, by removing the diaphragm from the end of the flash tube. Primers so tested shall be scrapped.

TABLE I

Sample	Sample Size	Size	Combined Samples Acceptance Number	Rejection Number
First	20	20	*	2
Second	20	20	*	2
Third	20	60	0	2
Fourth	20	80	1	3
Fifth	20	100	1	3
Sixth	20	120	1	3
Seventh	20	140	2	3

*No acceptance on this sample.

6.5.1.2 Functioning (see 3.3.2).-The sampling plan for this test shall be in accordance with Table II. Any artillery primer which fails to comply with the applicable requirement shall be classified defective. The test shall be performed as specified in 4.3.1.2. Removal of the black powder charge shall be accomplished as specified in 6.3.1.1.

TABLE II

Sample	Sample Size	Size	Combined Samples Acceptance Number	Rejection Number
First	75	75	*	2
Second	75	150	0	3
Third	75	225	0	3
Fourth	75	300	1	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

TABLE II (CONT'D)

Sample	Sample Size	Size	Combined Samples Acceptance Number	Combined Samples Rejection Number
Fifth	75	375	2	5
Sixth	75	450	2	5
Seventh	75	525	4	5

*No acceptance on first sample.

6.5.2 Moisture content of black powder.-A sample of 25 primers shall be selected for this test. The black powder shall be removed from the flash tube by any suitable means. The moisture content of the black powder shall be determined in accordance with the method specified in Specification MIL-P-223. If the moisture content of any of the primers tested exceeds 0.7 percent, the lot of primers shall be rejected.

6.6 Critical defect report

6.6.1 Submission of critical defect reports.-For U. S. Army Munitions Command procurements, one copy of each critical defect report will be furnished the cognizant Government inspection agency; the Army Ammunition Procurement and Supply Agency, Attn: SMUAP-RO; Picatinny Arsenal, Attn: SMUPA-ND.

6.6.2 Reporting to other services.-For other than U. S. Army Munitions Command procurements, critical defect reporting shall be as prescribed by the contracting officer.

Custodian:
Army-MU

Preparing activity:
Army-MU

Project No. 1390-A369

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

ARTILLERY PRIMERS
STANDARDS FOR PAINT CONDITIONS IN FLASH HOLES

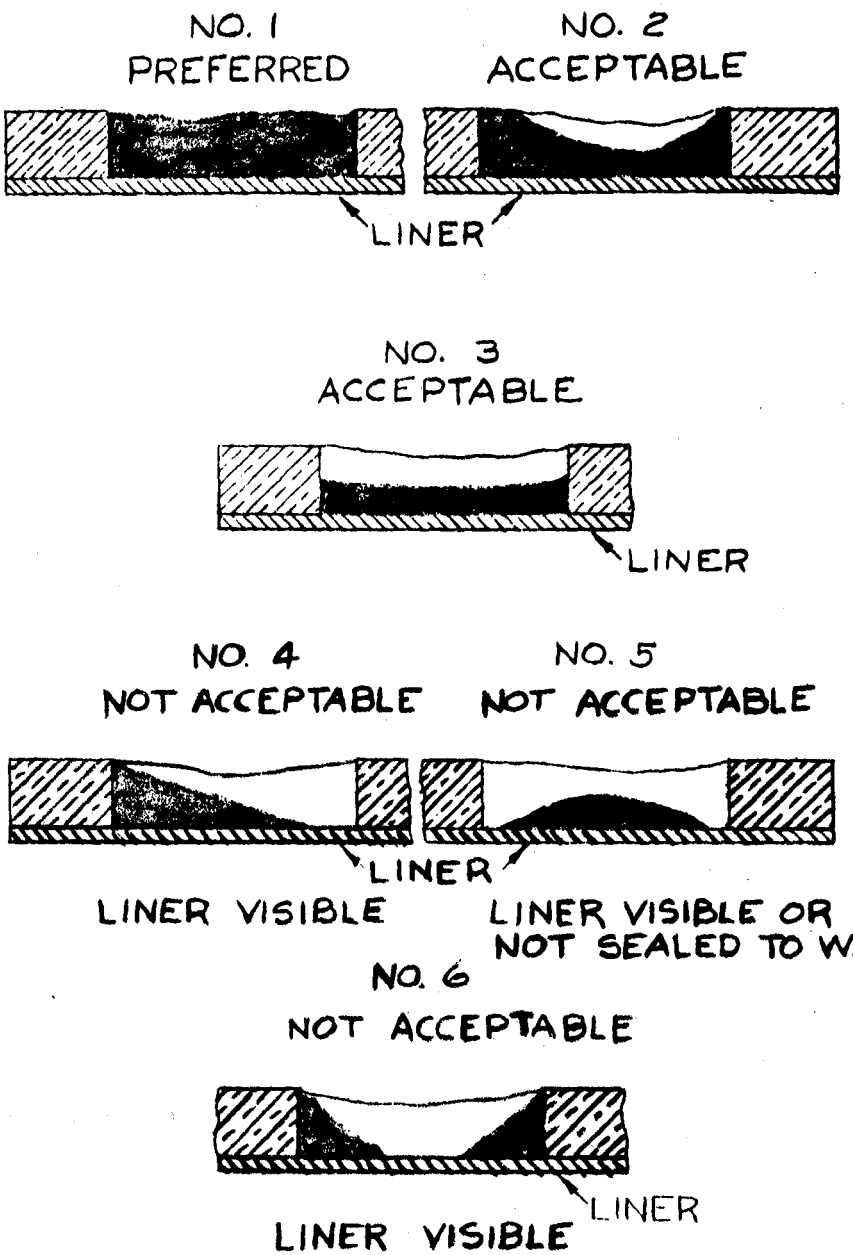


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.