MIL-P-46294B (PA)
18 March 1976
SUPERSEDING
MIL-P-46294A (MU)
20 December 1963

MILITARY SPECIFICATION

PRIMER, PERCUSSION, M58
LOADING, ASSEMBLING AND PACKING

~~This~~ specification is approved for use by Picatinny Arsenal Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the loading, assembling and packing for one type of percussion primer designated as Primer, Percussion, M58.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-223	- Powder, Black
MIL-P-20449	- Primer, Percussion, M61, Loading, Assembling and Packing
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-1235	- Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

FSC: 1390

Source: https://assist.dla.mil -- Downloaded: 202640-22T05:28Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY

8838153	- Primer, Percussion M58, Assembly
7548043	- Box, Packing, Ammo, for Primers, Percussion, M58 or M62, Assembly, Details and Packing
7548042	- Carton, Packing, Ammo, for Primer, Percussion, M58 or M62, Assembly, Details, Packing and Marking

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement and functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Material.-Materials and parts shall be in accordance with applicable drawings and specifications.

3.2 Percussion primer.-The percussion primer shall comply with all requirements specified on Drawing (dwg.) 8838153, and with all requirements specified in applicable specifications.

3.3 Head assembly

3.3.1 Non-functioning.-The head assemblies shall not function under an applied energy value of 47.52 inch-ounces, minimum (min.), when tested as specified in 4.3.1.1.

3.3.2 Functioning.-The head assemblies shall function under an applied energy value of 159.20 inch-ounces, maximum (max.), when tested as specified in 4.3.1.2.

3.4 Primer Assembly Functioning.-The primer assembly shall function without audible hangfire or evidence of ruptured, broken or detached parts when tested as specified in 4.3.2.

3.5 Moisture content of black powder.-The moisture content of the black powder at the loading station, at the time of loading shall not exceed 0.5 percent, when tested as specified in 4.3.3.

3.6 Workmanship.-All parts shall be free of burrs, chips, dirt, grease, cracks, rust corrosion and other foreign material. The cleaning method used shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents used.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:28Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection and Standard Quality Assurance Provisions.-Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Quality Conformance Inspection

4.2.1 Inspection Lot Formation.-Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of Primers shall contain:

a. Metal parts of one lot interfix number from one manufacturer.
b. Black powder of one lot number from one manufacturer.
c. Primers, Percussion, M61 of one lot interfix number from one manufacturer.

4.2.2 Examination.-See MIL-A-48078

a. Sampling plans - Unless otherwise specified in the classification of Defects and Test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II, except that continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202640-22T05:28Z
Check the source to verify that this is the currentversion before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.2.2.1	Head, prior to assembling of battery cup or firing plug	1 OF 1	8838153
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Percussion element missing, cocked or inverted		.40%	3.2	Visual
Minor					
201	Seal between percussion element assembly and head assembly missing or incomplete		.65%	3.2	Visual
202	Evidence of poor workmanship		.65%	3.6	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46204B (EA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.2	Head, prior to assembling to body				8838135
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Firing plug or battery cup above flush with surface of head		100%	3.2	Gage/Manual
Major					
101	Firing plug missing, cocked or inverted		40%	3.2	Visual
102	Flash hole in head completely obstructed		40%	3.2	Visual
103	Battery cup loose or missing		40%	3.2	Visual/Manual
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.3	Body, prior to assembly of liner				8838089
					NEXT HIGHER ASSEMBLY
					8838153
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Any flash hole missing from body		100%	3.2	Gage
Major	None defined				
Minor					
201	Evidence of poor workmanship		.65%	3.6	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.4	Body, prior to assembly of end diaphragm				8838135
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Charge retaining diaphragm missing or punctured		.40%	3.2	Visual
Minor					
201	Distance from end to charge retaining diaphragm		.65%	3.2	Gage
202	Charge retaining diaphragm inverted or improperly sealed		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.2.2.5	Body, prior to assembling head assembly		8838153
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Weight of charge		.40%	3.2	Balance
102	Liner fails to cover all holes		.40%	3.2	Visual
103	Moisture content of black powder		see 4.2.3.4	3.5	4.3.3
Minor					
201	Foreign matter in charge		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.2.2.6	Assembly				8838135
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Non-functioning		see 4.2.3.1	3.3.1	4.3.1.1
Major					
101	Any flash hole not completely sealed (see Note 1)		.40%	3.2	Visual
102	Head assembly loose on body		.40%	3.2	Manual
103	Functioning		see 4.2.3.1	3.3.2	4.3.1.2
104	Primer assembly		see 4.2.3.2	3.4	4.3.2
Minor					
201	Total length, max.		.65%	3.2	Gage
202	End diaphragm above flush with body		.65%	3.2	Gage
203	Diameter of flange, max.		.65%	3.2	Gage
204	Crimp of body to head missing or incomplete		.65%	3.2	Visual

NOTES: Note 1: Sketches 1, 2 and 3 on figure 1 indicate acceptable primers. Furthermore, a primer with holes displaying the conditions 4. 5 and 6 may be classed acceptable provided that the visible liner is thoroughly impregnated with paint or lacquer and not more than 20 percent of the holes have this condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.2.2.6	CONTINUATION SHEET				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
205	Marking misleading or unidentifiable		.65%	3.2	Visual
206	Evidence of poor workmanship		.65%	3.6	Visual
207	End diaphragm loose or inverted		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.7	Carton, prior to sealing				7548042
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Any packing material missing		.65%	3.2	Visual
202	Separator damaged to extent that primers touch each other		.65%	3.2	Visual
203	Primer missing		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.8	Carton, sealed				7548042
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Sealing strip torn, badly wrinkled, incomplete or otherwise fails to seal carton		.65%	3.2	Visual
202	Carton torn, cut or punctured		.65%	3.2	Visual
203	Marking misleading or unidentifiable		.65%	3.2	Visual
204	Head end of carton not identifiable		.65%	3.2	Visual
205	Contents loose		.65%	3.2	Manual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.9	Sealed, barrier bag				7548042
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Seal improper or incomplete		.40%	3.2	Visual
102	Bag punctured, torn or cut		.40%	3.2	Visual
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74 Auto

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.2.2.10	Carton sealed, prior to outer wrapping (alternative)	1 OF 1	7548042
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inner wrap cut, torn or punctured		.40%	3.2	Visual
102	Wrapped carton incompletely covered with compound		.40%	3.2	Visual
103	Sealing strip badly wrinkled, incomplete or otherwise fails to seal carton		.40%	3.2	Visual
Minor					
201	Marking misleading or unidentifiable		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.2.2.11	Carton assembled (alternative)				7548042
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outer wrapping cut, torn or punctured		.40%	3.2	Visual
102	Sealing strip torn, badly wrinkled, incomplete or otherwise fails to seal carton		.40%	3.2	Visual
Minor					
102	Marking misleading or unidentifiable		.65%	3.2	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-46294B (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.2.2.12	Packing box, prior to sealing		7548043
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Carton missing		.40%	3.2	Visual
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.2.2.13	Packing box seal	1 OF 1	7548043
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Box broken, board loose or protruding nail		.40%	3.2	Visual
102	Hardware or strapping missing, broken or loose		.40%	3.2	Visual
Minor					
201	Car seal missing, unsealed or improperly positioned		.65%	3.2	Visual
202	Hardware or strapping improperly engaged or mislocated		.65%	3.2	Visual
203	Marking misleading or unidentifiable		.65%	3.2	Visual
204	Contents loose		.65%	3.2	Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.2.3 Testing

4.2.3.1 Head assembly

4.2.3.1.1 Non-functioning

4.2.3.1.1.1 Beginning with the first lot produced, and continuing until three consecutive lots have complied with the acceptance criteria specified, a sample of 150 head assemblies shall be randomly selected from each lot for the test. If any sample fails to comply with requirement the lot shall be rejected. The test shall be performed as specified in 4.3.1.1.

4.2.3.1.1.2 After three consecutive lots have met the criteria of 4.2.3.1.1.1, a sample of 50 head assemblies shall be randomly selected from each lot for this test. If one or more primers fail to comply with the applicable requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.1.1 using equipment in accordance with 4.2.4. Primers subjected to this test shall be destroyed.

4.2.3.1.2 Functioning

4.2.3.1.2.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the applicable requirements specified two hundred and fifty samples shall be randomly selected from each lot for this test. If three or more primers fail to comply with the applicable requirements, the lot shall be rejected. If one or two defects are found, a second sample of five hundred primers shall be tested. If the combined number of defectives in both the first and second sample is three or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2 using equipment in accordance with 4.2.4.

4.2.3.1.2.2 After three consecutive lots have met the criteria of 4.2.3.1.2.1, a sample of 125 primers shall be randomly selected from each lot for this test. If two or more primers fail to comply with the applicable requirement, the lot shall be rejected. If only one defect is found, a second sample of 250 primers shall be tested. If the combined number of defectives in both the first and second sample is two or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2 using equipment in accordance with 4.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.2.3.2 Primer assembly functioning and pressure resistance- Major defect - A sample of 25 primers shall be selected from each lot for this test. If any primer fails to comply with the applicable requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.2.

4.2.3.3 Check test for deterioration of Primer, Percussion (M61 Assembly).-If the total elapsed time between original acceptance of the M61 primer lot and the assembly of that lot into the M58 primer exceeds two years, or if the M61 primers have been subjected to adverse conditions for any period of time since previous test, the M61 primer lot shall be subjected to and must satisfactorily pass the check test for deterioration specified in Specification MIL-P-20449 immediately before the M61 primer lot is assembled into the M58 primers (see 6.3).

4.2.3.4 Moisture content of black powder - Major defect - A sample of one primer body, prior to assembly to the head, shall be randomly selected from each eight hours production. The black powder shall be tested as specified in 4.3.3 and any failure to comply with the applicable requirement shall be cause for rejection of the eight hours production represented by the sample.

4.2.4 Inspection Equipment.-The inspection equipment required to perform the examinations and tests prescribed herein is described in the paragraph Reference/Inspection in Method column in tables starting with paragraph 4.2.2.1. The contractor shall submit for approval inspection equipment design in accordance with the terms of the contract. See section 6 of MIL-A-48078.

4.3 Test methods and procedures

4.3.1 Head assembly

4.3.1.1 Non-functioning.-The loaded heads, prior to assembling to the body, shall be assembled into the test fixture (see 4.2.4). A steel ball weighing a min. of 7.92 ounces shall be dropped from a height to give the required impact force (approximately 6 inches).

4.3.1.2 Functioning.-The test shall be performed as specified in 4.3.1.1 except that the weight of the ball shall be 7.96 ounces max., and the height shall be adjusted to give the required impact force (approximately 20 inches).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

4.3.2 Primer assembly functioning and pressure resistance.- The primers shall be assembled to the complete round for which the primer was designed and fired from the gun for which the round is standard. The primer shall be observed to determine compliance with the requirement.

4.3.3 Determination of moisture content of black powder.- The moisture content of the black powder shall be determined in accordance with the procedure specified in Specification MIL-P-223.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Level C.-The primers shall be preserved and packaged in accordance with dwg. 7548042.

5.2 Packing

5.2.1 Level C.-The cartons shall be packed in accordance with dwg. 7548043.

5.3 Marking.-Marking shall be in accordance with dwgs. 7548042 and 7548043.

6. NOTES

6.1 Ordering data.-See MIL-A-48078.

6.2 Submission of Design for Approval.-See 6.2.3 of MIL-A-48078. Submit equipment designs as required, to Commander, Picatinny Arsenal, ATTN: SARPA-T-T, Dover, New Jersey 07801.

6.3 Cost of check tests.-The contracting officer will arrange for the contractor to be reimbursed for the expense incurred in the performance of the check test. The test shall be conducted at Government expense without cost to the contractor who loaded the M61 primer or the contractor loading and assembling the M58 primer, and shall not constitute a basis for rejection against either contractor, except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., while the primers were under the jurisdiction of either contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

6.4 Check test for possible deterioration of percussion artillery primers.-The following tests are designed to prevent the loading of artillery primers which have deteriorated into a major ammunition item. The test shall be performed on artillery primers from each lot which has been stored under normal conditions for more than two years or under adverse conditions for any period of time. If the specification for the ammunition item into which the artillery primers are loaded does not require that the check test be performed, the contracting officer should insert a provision for the performance of the check test in the contract.

6.4.1 Head assembly function (see 3.3.2).-The sampling plan for the test shall be in accordance with Table I. Any head assembly which fails to comply with the applicable requirement shall be rejected. The test shall be performed as specified in 4.3.1.2, except that the body and the head assembly shall be separated in a manner that will not damage the head assembly to the extent that the validity of the test results would be questionable.

TABLE I

Sample	Sample Size	Size	Combined Samples Acceptance Number	Combined Samples Rejection Number
First	75	75	*	2
Second	75	150	0	3
Third	75	225	0	3
Fourth	75	300	1	4
Fifth	75	375	2	5
Sixth	75	450	2	5
Seventh	75	525	4	5

*No acceptance on first sample

6.4.2 Moisture content of black powder.-A sample of 25 primers shall be selected for this test. The black powder shall be removed from the body by any suitable means. **This moisture content of the powder shall be determined in accordance with the methods specified in Specification MIL-P-223. If the moisture content of the powder tested exceeds 0.7 percent, the lot of primers shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:28Z
Check the source to verify that this is the currenversion before use.

**Since black powder is hygroscopic, it is advisable to place the powder in a dry, air-tight container immediately upon removal, and to run the determination as soon as possible thereafter.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1390-A120

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:28Z
Check the source to verify that this is the current version before use.

ARTILLERY PRIMERS
STANDARDS FOR PAINT CONDITIONS IN FLASH HOLES

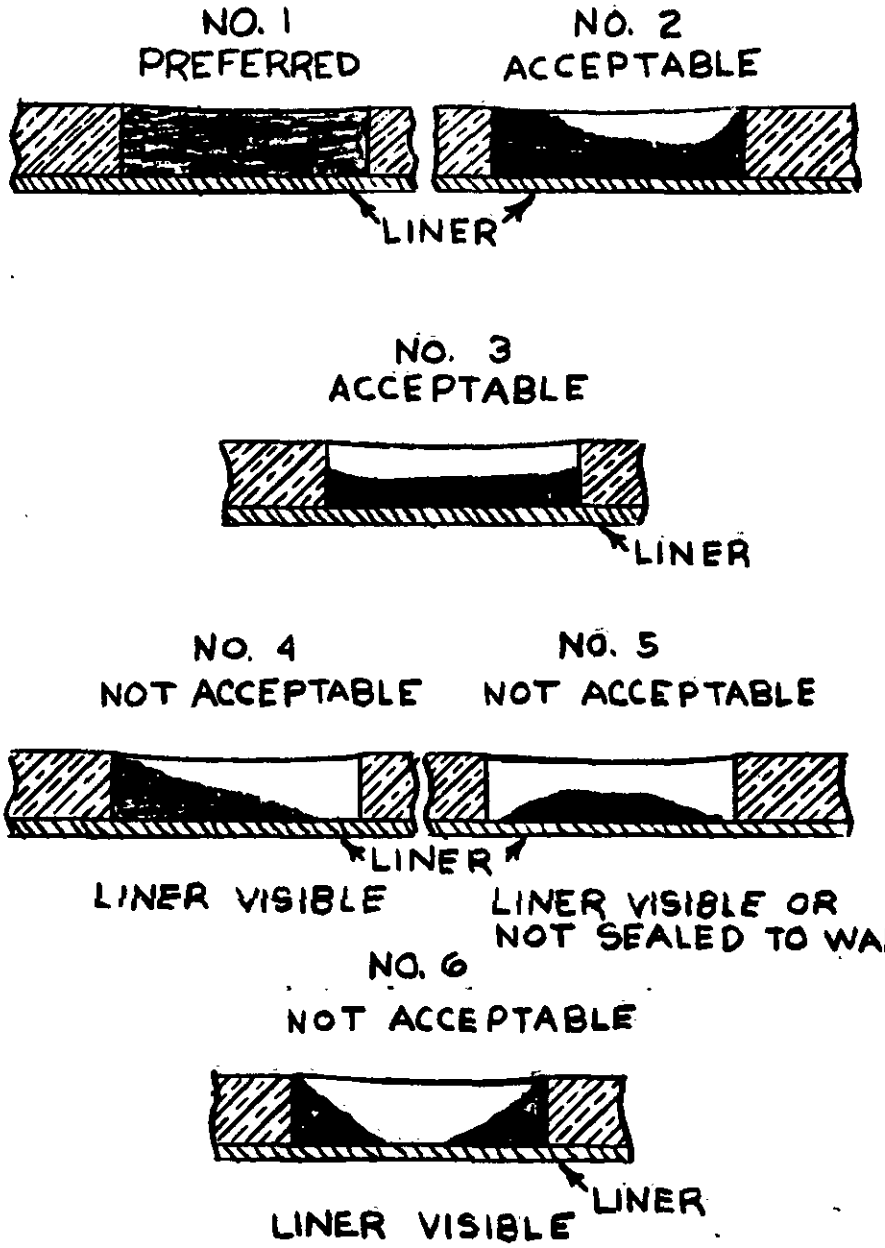


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:28Z
Check the source to verify that this is the current version before use.