INCH-POUND
MIL-R-2726/48B(SH)
16 August 1989
SUPERSEDING
MIL-R-2726/48A(SH)
3 July 1986

MILITARY SPECIFICATION SHEET

RECEPTACLE AND SWITCH, ELECTRICAL, ENCLOSED, 15-AMPERE, 125-VOLT, INTERLOCKING, GROUNDED (SYMBOL NO. 900.1)


(B) This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-2726.

(B) denotes changes.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

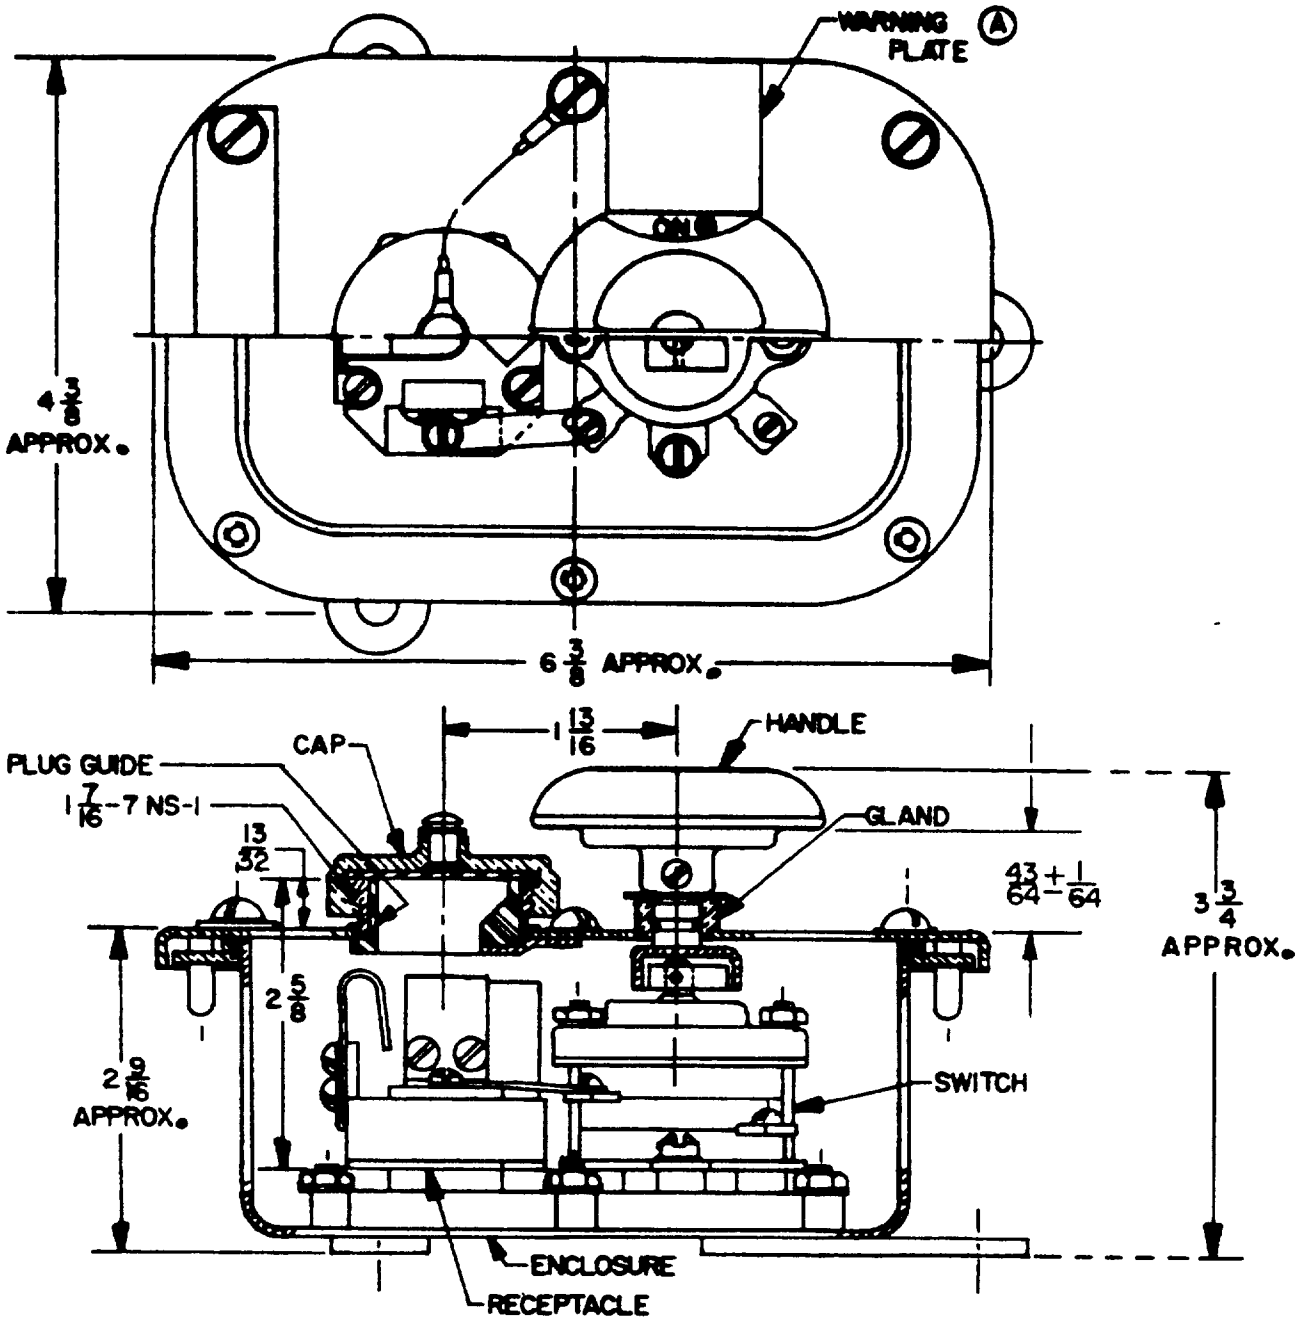

SH 9128

(B) FIGURE 1 Dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

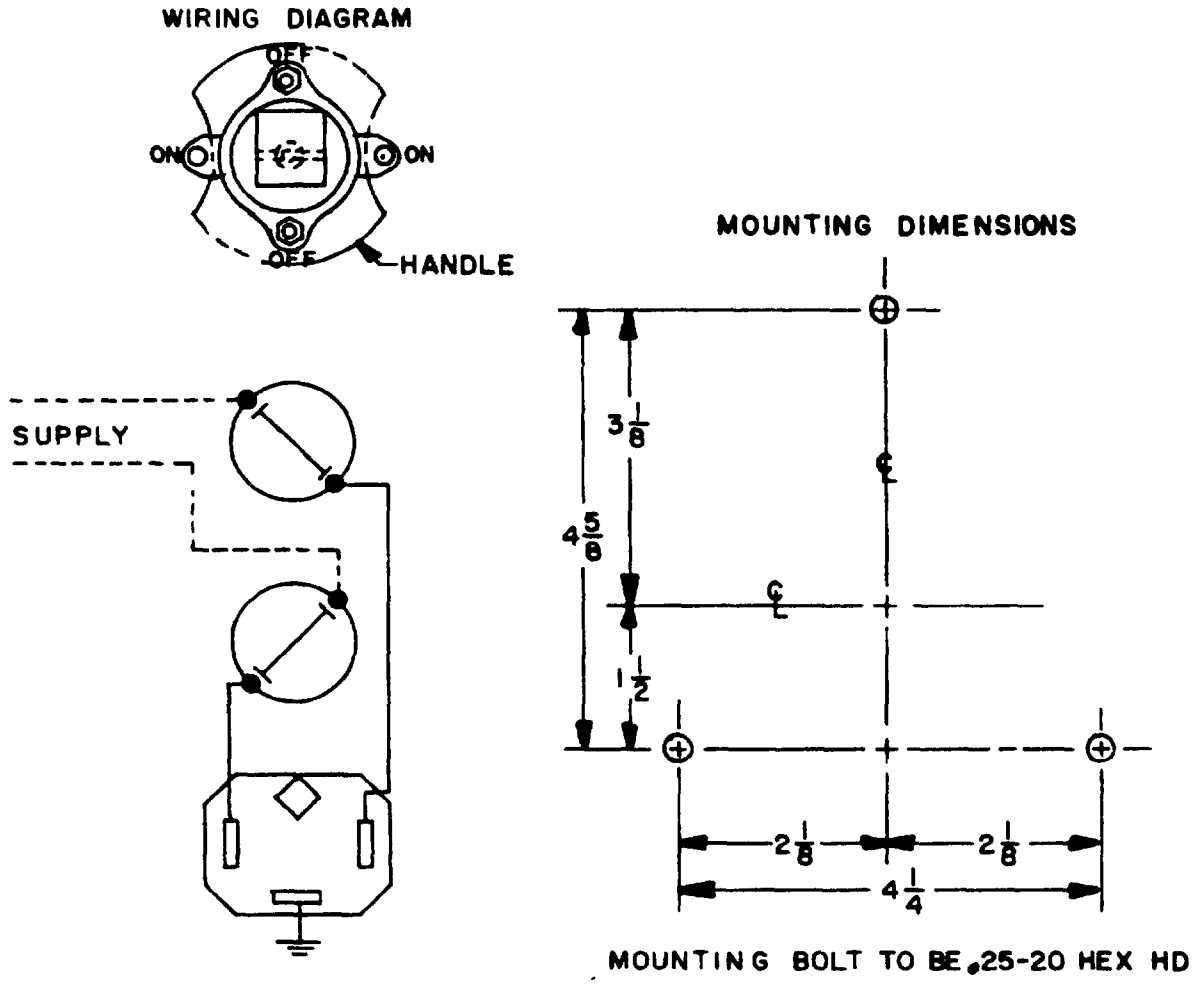

SH 9128-1

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances are ± 1/64 inch for fractions.
2 Supersedes Drawing 9000-S6202-74068, symbol 900.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configurations: See figure 1.
2. Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.
3. (B) Material: All materials, except those in the MIL-S-15291 rotary switch, shall be nonmagnetic
4. Receptacle: MIL-R-2726/47, part number M2726/47-002.
5. Plug guide: MIL-R-2726/47, part number M2726/47-003.
6. Gland: Metal.
7. Cap: In accordance with Drawing 9000-S6202-74031-119.
8. Switch: Rotary, in accordance with type 1SR2A4 of MIL-S-15291.
9. Design: Switch and receptacle interlock required.
10. Mating plug: MIL-R-2726/50, part number M2726/50-001 (not furnished).
11. Part number: M2726/48-001.
12. Enclosure assembly. In accordance with MIL-E-24142/2, part number M24142/2-001.
13. Cable assembly: In accordance with MS17339.
14. Electrical rating: 15-ampere, 125-volt
15. Handle: The handle shall be of nonconducting material or plastic coated and designed to turn the switch on and off and also serve as an interlock to prevent removal or insertion of the plug and cap while the switch is in the "ON" position.

QUALITY ASSURANCE

Quality assurance shall be as specified in MIL-R-2726 and table I herein. The first article and quality conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I First article and quality conformance inspection.

Inspection	Requirement	Test method	First article	Quality conformance
Examination	3 1, 3.3, 3 4 3.5, 3.6 and 3.7	4.6.1	X	X
Insulation resistance	3.5 1	4.7.1	X	X
Dielectric withstanding voltage	3 5.2	4.7.2	X	X
Operation	3.5.13	4.7.13	X	X
Vibration	3.5.9	4 7.9	X	
Shock	3.5 10	4.7.10	X	
Salt spray	3.5.11	4 7.11	X	
Effectiveness of enclosure	3.5.4	4.7.4	X	X
Dielectric withstanding voltage	3 5 2	4.7.2	X	
Magnetic permeability	3.5 17	4.7.17	X	X

Preparing activity
Navy - SH
(Project 5935-N351)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.