INCH-POUND

MIL-DTL-2726/48D
w/AMENDMENT 1
21 September 2022
SUPERSEDING
MIL-DTL-2726/48D
13 May 2005

DETAIL SPECIFICATION SHEET

RECEPTACLE AND SWITCH, ELECTRICAL, ENCLOSED, 15 - AMPERE, 125 - VOLT, INTERLOCKING, GROUNDED (SYMBOL NO. 900.1)

Reactivated after 13 May 2005 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

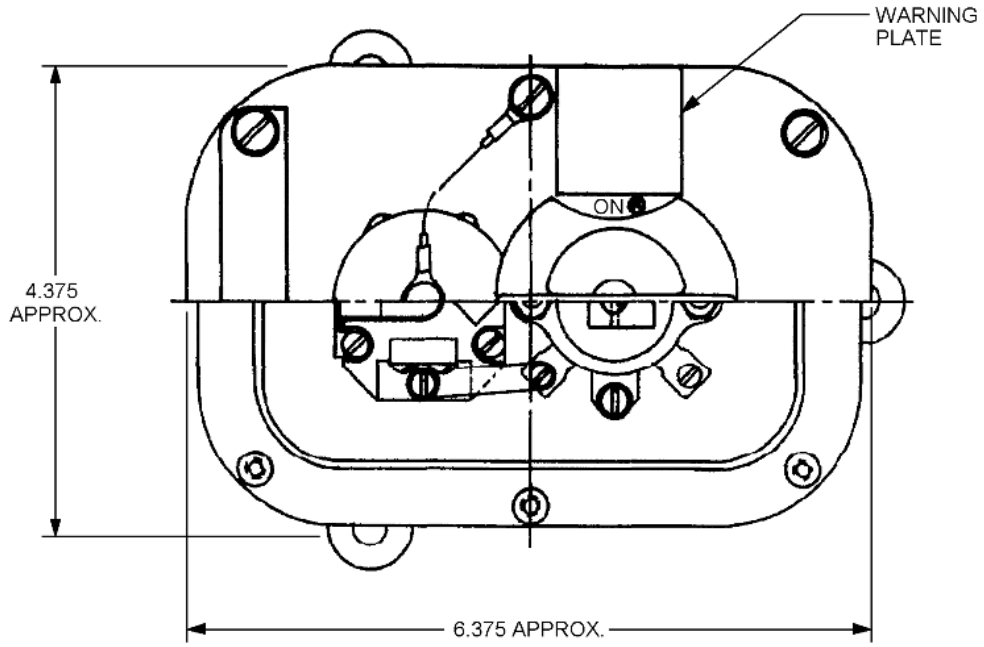
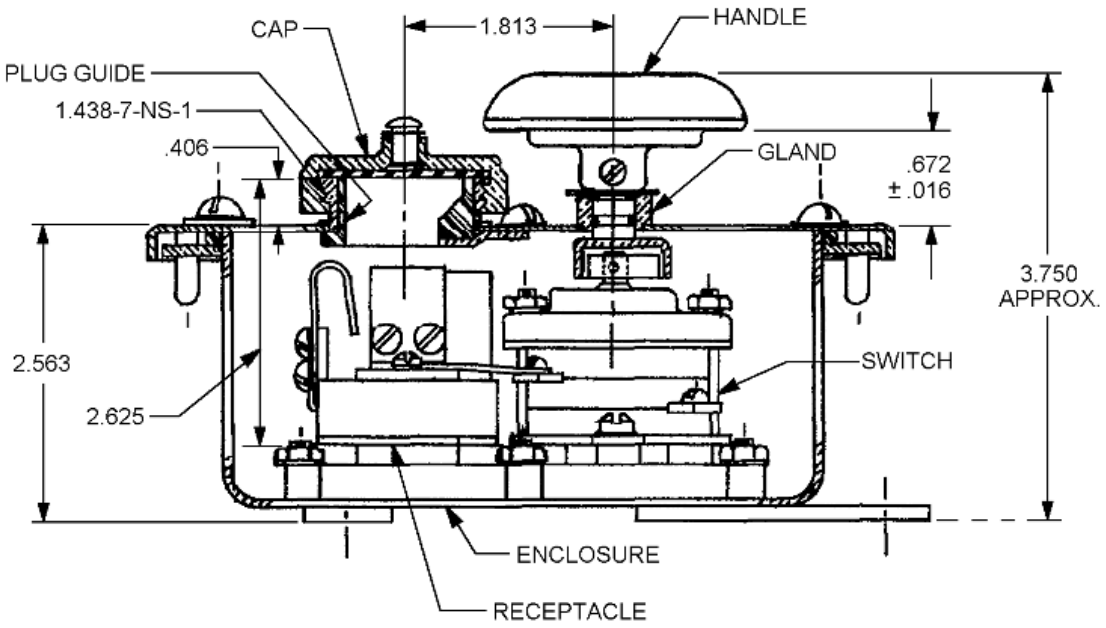


FIGURE 1. Dimensions and configuration.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.





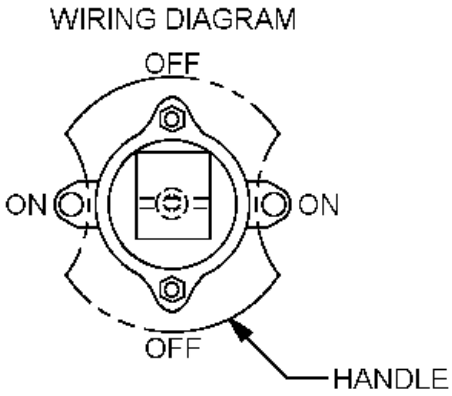


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

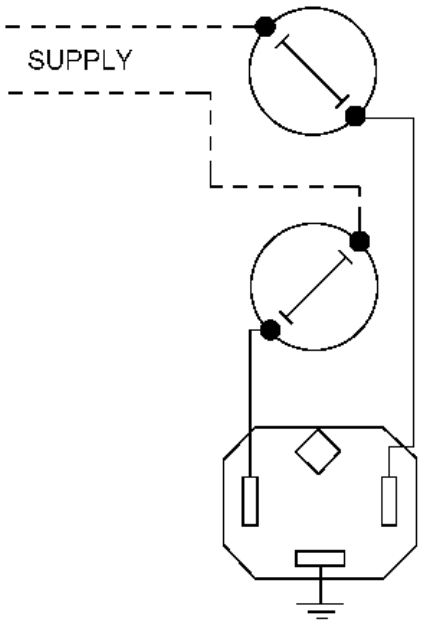

WIRING DIAGRAM

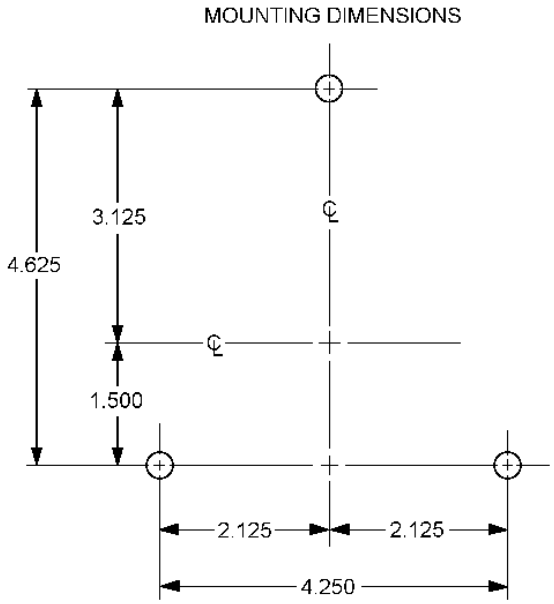


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .016 (0.41mm).
3. Supersedes Drawing 9000-S6202-74068, symbol 900.

Inches	mm
.016	0.406
.406	10.31
.672	17.07
1.438	36.53
1.500	38.10
1.813	46.05
2.125	53.98
2.563	65.10
2.625	66.67
3.125	79.38
3.750	95.25
4.250	107.95
4.375	111.12
6.375	161.92

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

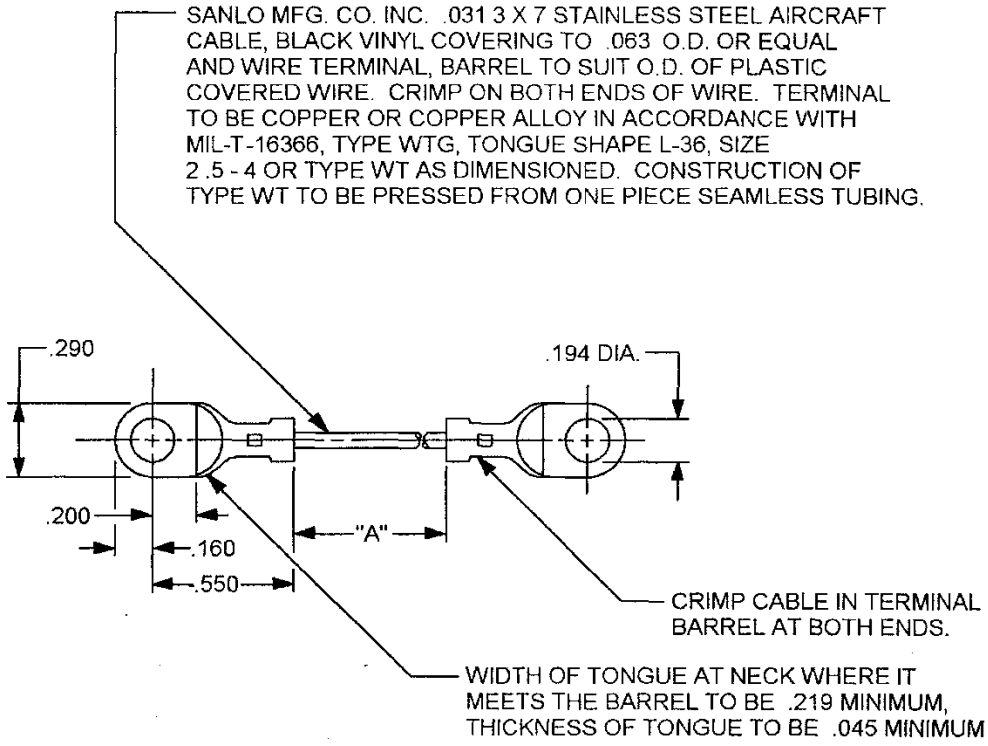

Inches	mm
.031	0.79
.045	1.14
.160	4.06
.194	4.93
.200	5.08
.219	5.56
.290	7.37
.550	13.97
6.00	152.40
10.00	254.00

NOTES:
1. Dimensions are in inches.
2. Cable length “A” may be 6 inches or 10 inches.

FIGURE 2. Cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: The plug shall be watertight in accordance with MIL-STD-108.

Material: All materials except those in the MIL-DTL-15291 rotary switch shall be nonmagnetic.

Receptacle: MIL-DTL-2726/47, Part or Identifying Number (PIN) M2726/47-002.

Plug guide: MIL-DTL-2726/47, PIN M2726/47-003.

Gland: Metal.

Cap: In accordance with Drawing 9000-S6202-74031-119.

Switch: Rotary, in accordance with type 1SR2A4 of MIL-DTL-15291.

Design: Switch and receptacle interlock required.

Mating plug: MIL-DTL-2726/50, PIN M2726/50-001 (not furnished).

PIN: M2726148-001.

Enclosure assembly: In accordance with MIL-E-24142/2, PIN M24142/2-001.

Cable assembly: In accordance with figure 2.

Electrical rating: 15 ampere, 125 volt.

Handle: The handle shall be of non-conducting material or plastic coated and designed to turn the switch on and off and also serve as an interlock to prevent removal or insertion of the plug and cap while the switch is in the “ON” position.

Examination and tests:

Requirements for first article and quality conformance, as shown below, shall be in accordance with MIL-DTL-2726. Examinations and tests shall be performed in the order shown (see table I).

Examination: Visual and dimensional examination shall meet the requirements for materials, design and construction, performance, marking and workmanship indicated in MIL-DTL-2726.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

Tests: The following tests shall be required.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Quality conformance
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Operation	X	X
Vibration	X	
Shock	X	
Salt spray	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	
Magnetic permeability	X	X

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

MIL-DTL-2726/47
MIL-DTL-2726/50
MIL-E-24142/2
MIL-STD-108
MIL-DTL-15291
MIL-T-16366
Drawing 9000-S6202-74031-119

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-2022-199)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.