INCH-POUND
MIL-DTL-2726/63C
31 August 2005
SUPERSEDING
MIL-R-2726/63B(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, ENCLOSED 4-PIN GROUNDED, 10-AMPERE, 450-VOLT, 60-HERTZ ALTERNATING CURRENT (SYMBOL NO. 1268)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

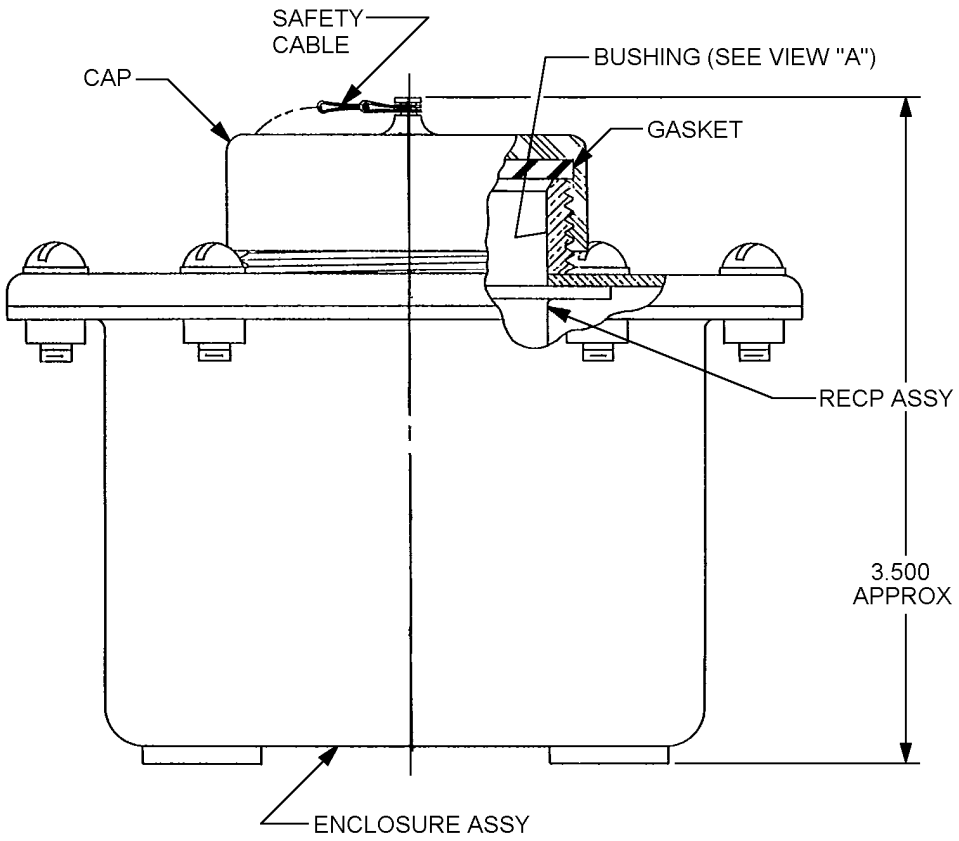

FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:35Z
Check the source to verify that this is the current version before use.

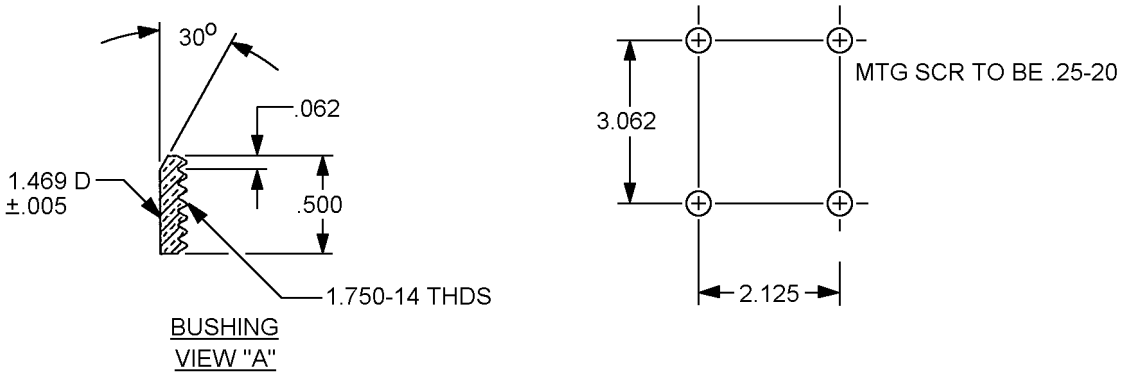

Inches	mm
.005	0.13
.062	1.57
.25	6.4
.500	12.50
1.469	37.12
1.750	44.45
2.125	28.58
3.062	77.77
3.500	88.90

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± 0°30’ on angles.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Receptacle assembly: MIL-DTL-2726/58, Part or Identifying Number (PIN): M2726/58-001.

Material: Enclosure may be of molded plastic, in accordance with type MAI-60 of ASTM-D5948.
Cap – Polyamide (black).

Design: Enclosure cover and receptacle assembly may be a one-piece molded unit.

Enclosure assembly: MIL-DTL-24142/9, PIN M24142/9-001.

Mating plug: MIL-DTL-2726/53, PIN M2726/53-001.

PIN: M2726/63-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:35Z
Check the source to verify that this is the current version before use.

Electrical rating: 10-ampere, 450-volt, alternating current, 60-hertz.

VERIFICATION

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Vibration	X	
Shock	X	
Salt spray	X	
Effectiveness of enclosure	X	X

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D5948
MIL-DTL-24132/9
MIL-DTL-2726/53
MIL-DTL-2726/58
MIL-STD-108

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC
Navy - SH

Preparing activity:
DLA - CC

(Project 5935-4757-000)

Review activities:
Army – AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:35Z
Check the source to verify that this is the current version before use.