MIL-R-2726/66D(SH)
18 June 1987
SUPERSEDING
MIL-R-2726/66C(SH)
3 July 1986

MILITARY SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, TOTALLY ENCLOSED, 15-AMPERE, 125-VOLT, 60-HERTZ, BLADED TYPE, GROUNDED (SYMBOL NO. 730.1)


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-R-2726.

(D) denotes changes.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:35Z
Check the source to verify that this is the current version before use.

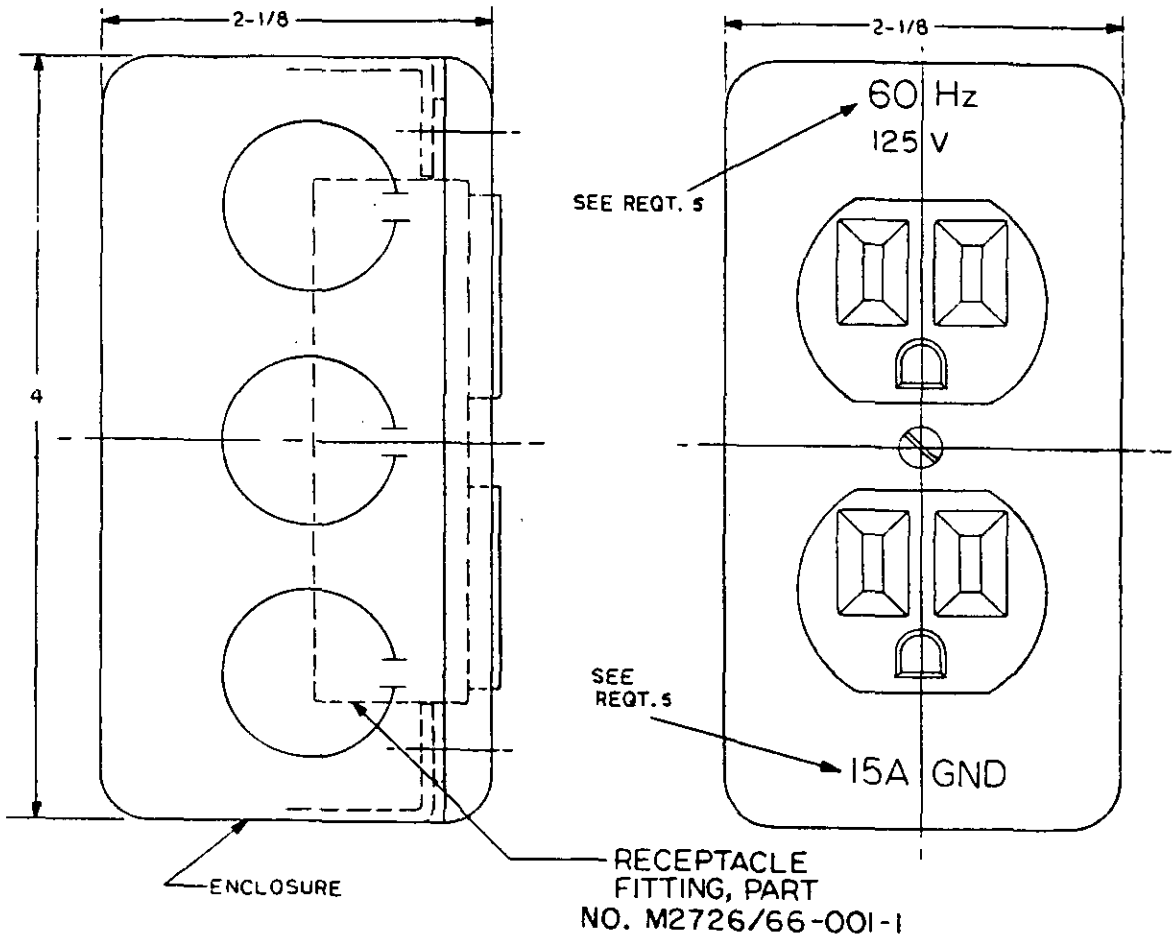

SH 9147

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-16T15:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figure 1.
2. H.I. shock: Disengagement of the test plug from the receptacle under H.I. shock shall not be considered as a failure.
3. (D) Receptacle fitting: W-C-596/12, part number W-C-596/12-1. The ground contact mounting strap shall be nickel-plated.
4. (D) The receptacle enclosure shall be of steel in accordance with W-J-800. The box knockouts shall be conventional or reverse, and shall meet the knockout force of 30 pounds as specified in the requirements of table I below.
5. Marking: Letters shall be stamped 1/4 inch high and shall be filled with red paint.
6. Mating plug: W-C-596, part number W-C-596/13-3 (not furnished).
7. Part number: M2726/66-001 - complete receptacle.
   M2726/66-001-1 - receptacle fitting.
8. Electrical rating: 15-ampere, 125-volt, alternating current, 60-hertz.

QUALITY ASSURANCE:

Quality assurance shall be as specified in MIL-R-2726 and table I herein. The first article and quality conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	Requirement	Test method	First article	Quality conformance
Examination	3.1, 3.3, 3.4, 3.5, 3.6 and 3.7	4.6.1	X	X
Endurance	3.5.5	4.7.5	X	
Ground contact resistance	3.5.3.3	4.7.3.3	X	X
Vibration	3.5.9	4.7.9	X	
Shock	3.5.10	4.7.10	X	
Salt spray	3.5.11	4.7.11	X	
Knockout force	3.5.19	4.7.19	X	

Preparing activity:
Navy - SH
(Project 5935-N315)

Source: https://assist.dla.mil -- Downloaded: 202640-16T15:35Z
Check the source to verify that this is the current version before use.