REVIEW ACTIVITIES: ARMY - MD
AIR FORCE - 82

USER ACTIVITIES: ARMY - CE, ME, MI

FED. SUP CLASS
6640

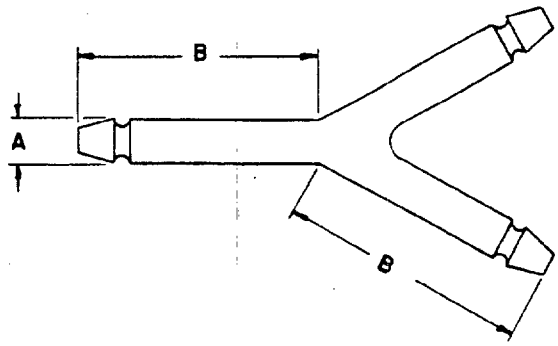

PART NUMBER	NOMINAL DIMENSIONAL DATA		
	A OUTSIDE DIAMETER mm	B LENGTH OF ARMS mm	ID OF TUBING ACCOMMODATED in.
MS36076-5	5 ± 0.5	60 ± 2	1/8
MS36076-1	6	44	3/16
MS36076-2	8 ± 0.5	44 ± 2	1/4
MS36076-6	8	44	1/4
MS36076-7	11	60	3/8
MS36076-3	12	60	3/8
MS36076-4	15	70	1/2

MATERIAL: MS36076-1 through MS36076-5 shall be of borosilicate glass in accordance with Federal Specification DD-G-541, Type I, Class A.

MS36076-6 and MS36076-7 shall be of polypropylene.

DESIGN: Glass connectors shall be Y-shaped with bulbous, fire polished ends.

NOTES:
1. Procurement document for MS36076-2 and MS36076-5 is Federal Specification DD-T-710.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
3. For design feature purposes, this standard takes precedence over procurement document referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) ENTIRE STANDARD REVISED

APPROVED 21 JUN 1961 REVISED (A) 20 SEP 1968

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MU Other Cust MS 82	TITLE CONNECTOR, ELASTIC TUBING, BRANCHED Y-shaped	MILITARY STANDARD MS36076	
Procurement Specification See Note 1	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 1 SEP 65 672 (Coordinated)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-512/A-1712

EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:34Z
Check the source to verify that this is the current version before use.