FED. SUP CLASS
6640

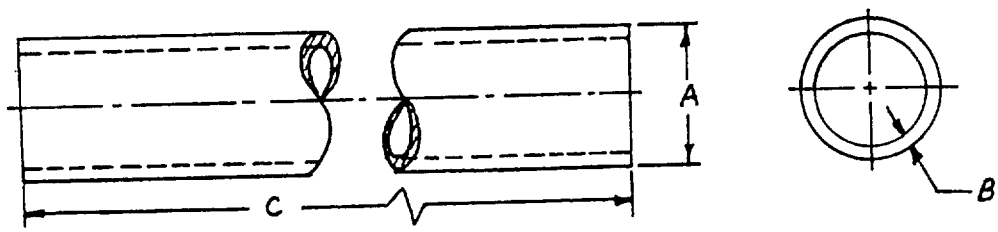

PART NUMBER	A OUTSIDE DIAMETER mm	B WALL THICKNESS mm
MS36079-1	4 ± 0.3	0.8 ± 0.1
MS36079-2	6 ± 0.3	1.0 ± 0.1
MS36079-3	8 ± 0.4	1.0 ± 0.1
MS36079-4	10 ± 0.4	1.0 ± 0.1
MS36079-5	11 ± 0.4	1.0 ± 0.1
MS36079-6	13 ± 0.4	1.2 ± 0.1
MS36079-7	16 ± 0.4	1.2 ± 0.1
MS36079-8	20 ± 0.6	1.2 ± 0.1
MS36079-9	25 ± 0.6	1.5 ± 0.2

MATERIAL: Tubing shall be of borosilicate glass in accordance with ASTM E438, Type I, Class A.

DESIGN: Tubing shall be cylindrical with uniform wall thickness and shall be furnished with overall length (dimension C) of 1219 ± 6 mm.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.
3. FSCM: 14674 and 84116.

APPROVED 21 June 1961 REVISED (A) 20 Sep 1968 (B) 7 DEC 1983

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(B) ENTIRE STANDARD REVISED

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		TUBING, GLASS, ROUND, STANDARD WALL	MS36079
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1208

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:34Z
Check the source to verify that this is the current version before use.