FED. SUP CLASS
4730

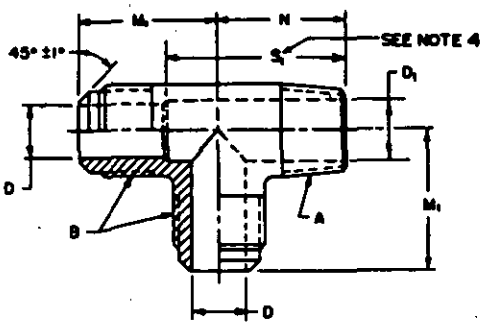

DASH NO.	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	D DIA DRILL	D_1 DIA DRILL	M_1 LENGTH ±.03	N LENGTH ±.03	S_1 DEPTH MIN
-1	1/8	1/8	.312-24UNF-2A	0.078	0.219	0.62	0.69	0.77
-2	3/16	1/8	.375-24UNF-2A	0.125	0.219	0.75	0.75	0.85
-3	1/4	1/8	.438-20UNF-2A	0.188	0.219	0.88	0.78	0.92
-4	5/16	1/8	.500-20UNF-2A	0.219	0.219	0.91	0.78	——
-5	3/8	1/4	.625-18UNF-2A	0.281	0.312	1.06	1.06	1.24
-6	7/16	1/4	.688-16UN-2A	0.312	0.312	1.12	1.06	——
-7	1/2	3/8	.750-16UNF-2A	0.406	0.406	1.22	1.12	——
-8	5/8	1/2	.875-14UNF-2A	0.500	0.562	1.41	1.38	1.67
-9	3/4	1/2	1.062-14UNS-2A	0.625	0.562	1.66	1.50	2.02
-10	7/8	3/4	1.250-12UNF-2A	0.750	0.750	1.75	1.69	——
-11	1	1	1.375-12UNF-2A	0.875	0.938	1.94	1.94	2.42

Material: Brass in accordance with (1) QQ-B-626, alloy 360, temper half hard or SAE UNS C36000, half hard or (2) QQ-B-626, alloy 377 or SAE UNS C37700.

Protective coating: None.

Dimensions and tolerances: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for 45° Flared Type Tube Fittings (SAE J512). Unless otherwise specified all dimensions are in inches.

Threads: Threads shall be in accordance with FED-STD-H28.

Part number: The MS part number consists of the MS number plus the dash number.
Example: MS39164-1

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
3. The illustration is for identification and is not intended to restrict designs and shapes not dimensioned.
4. At manufacturer's option, through passage may conform with the small diameter specified or be counterbored to the larger from the appropriate end for depth S_1.

Ⓔ CANCELLED - FOR PROCUREMENT USE

SAE J512-80

APPROVED 3 APR 62 REVISED Ⓐ 27 FEB 67 Ⓑ 22 OCT 69 Ⓒ 26 SEP 75 Ⓓ 15 JUN 82 Ⓔ 10 MAR 87

User activities:
Army - GL
Navy - OS

Review activities:
Army - AT, MI
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. ME Other Cust	INTERNATIONAL INTEREST	TITLE: TEE, PIPE TO TUBE MALE PIPE ON RUN 45° FLARED TYPE, AUTOMOTIVE	MILITARY STANDARD MS39164
PROCUREMENT SPECIFICATION MIL-F-1224	SUPERSEDES: ORDNANCE ENGINEERING STANDARD CNAX4 IN PART		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4730-0338

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:47Z
Check the source to verify that this is the current version before use.