FED. SUP CLASS
4720

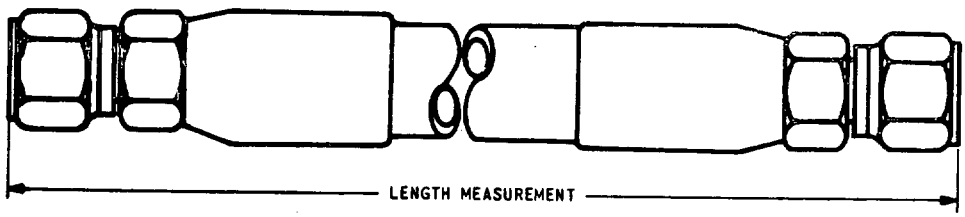

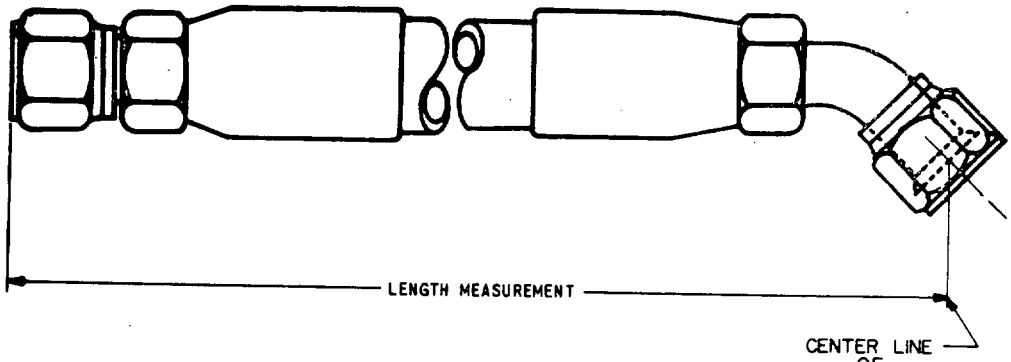

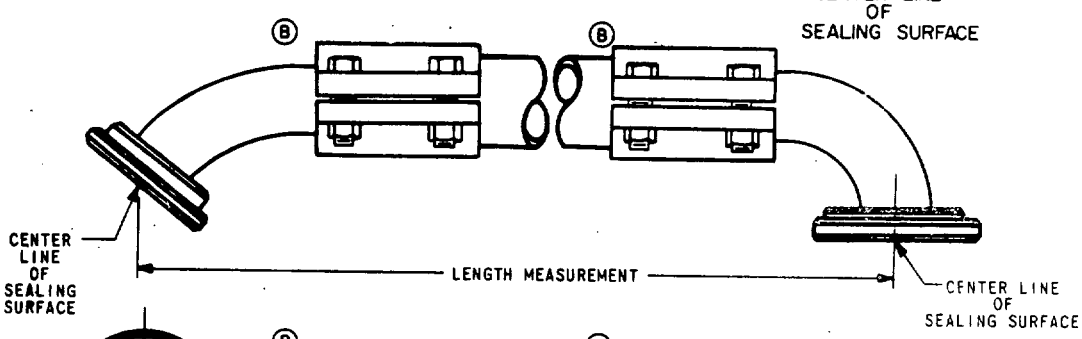

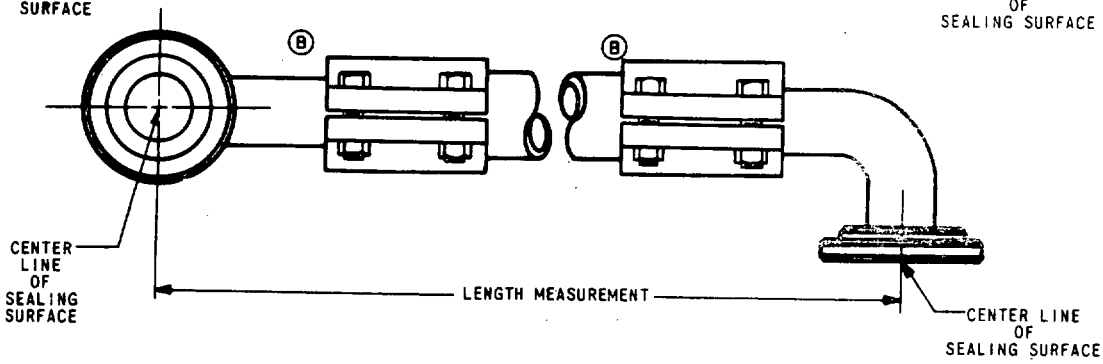

NOTE: THE LENGTH OF HOSE ASSEMBLIES SHALL BE THE OVERALL LENGTH MEASURED FROM THE EXTREME END OF ONE FITTING TO THE EXTREME END OF THE OTHER FITTING, EXCEPT WHERE ELBOW FITTINGS ARE USED. WHEN ELBOW FITTINGS ARE USED, THE LENGTH MEASUREMENT SHALL BE MADE FROM THE CENTER LINE OF THE SEALING SURFACE OF THE ELBOW FITTING.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 12 NOV 1965 REVISED (A) 28 DECEMBER 1970 (B) 14 SEPTEMBER 1984

REVIEW ACTIVITY: AL, CS
USER ACTIVITY: 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE, USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY-ME Other Cust	TITLE HOSE ASSEMBLY, RUBBER: HYDRAULIC, PRESSURE TYPE, LENGTH MEASUREMENT	MILITARY STANDARD MS 39266
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 4720-0640

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.