FED. SUP CLASS
3820

USER ACTIVITIES: MC

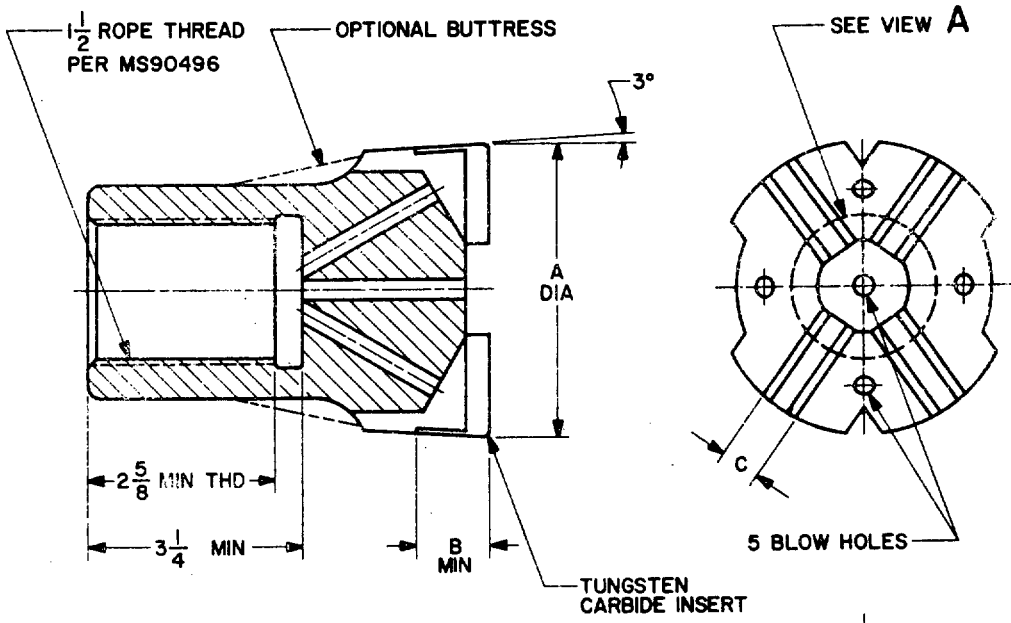

DASH NO.	DIA A	DIM. B	DIM. C	DIM. D
-1	2 1/2	1	1/2	21/32 ± 1/32
-2	2 3/4	1	1/2	21/32 ± 1/32
-3	3	1	9/16	11/16 ± 1/64
-4	3 1/2	1	9/16	11/16 ± 1/64
-5	4	1	5/8	1-1/32 ± 3/32

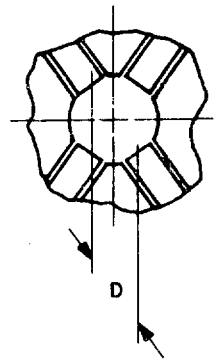

VIEW A
(DETAILS OMITTED
FOR CLARITY)

NOTES:

1. MATERIAL OF BODY SHALL BE HARDENED ALLOY STEEL
2. THREAD SHALL BE TURNED 90° TO CENTERLINE AND CONCENTRIC WITHIN .005 INCH OF CENTER BLOW HOLE.
3. BRAZING MATERIAL SHALL BE A SILVER-BRAZING ALLOY CONTAINING A MINIMUM OF 40 % SILVER
4. VOIDS AND PEEL SHALL NOT EXCEED 15 % OF THE BONDING SURFACE.
5. ALL DIMENSIONS ARE IN INCHES.
6. UNLESS OTHERWISE SPECIFIED, LINEAR TOLERANCE SHALL BE ± 1/64 INCH.
7. ANGULAR TOLERANCE SHALL BE ± 1/2°.
8. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-515 A-3801

APPROVED 6 November 1968 REVISED

This Military Standard is mandatory for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY - ME Other Cust NAVY - YD AIR FORCE - 84	TITLE BIT, STAR, ROCK DRILL, X-TYPE, FOR DRIFTER DRILLS	MILITARY STANDARD MS 39330
PROCUREMENT SPECIFICATION MIL-D-22233	SUPERSEDES: MS 39245	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.