FED. SUP CLASS
4730

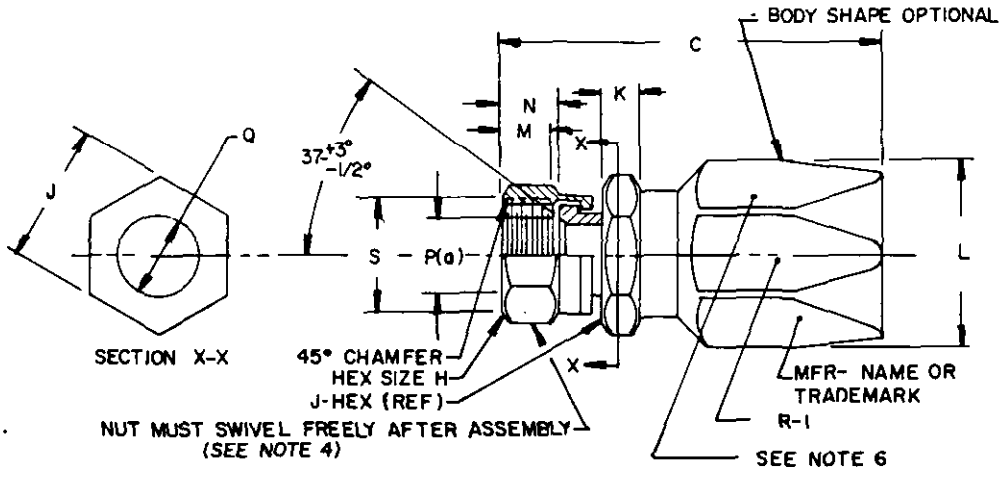

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 FULL INDICATOR READING.

TABLE I
DIMENSIONS FOR "A" COUPLINGS

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. (REF)	NOMINAL THREAD SIZE	H	K MIN	L MAX	M MIN	N +.030 -.000	P +.005	Q MIN	C MAX	S MIN	J MIN
-5	-4	1/4	1/2-20	.625	0.19	.87	0.331	0.375	0.355	0.156	2.62	0.52	.50
-6	-6	3/8	9/16-18	.688	0.22	1.09	0.333	0.375	0.435	0.260	2.78	0.58	.56
-8	-8	1/2	3/4-16	.875	0.31	1.20	0.375		.570	0.380	3.24	0.77	.75
-10	-8	1/2	7/8-14	1.000	0.31	1.20	0		.0	0.380	3.27	0.89	.87
-12	-12	3/4	1-1/16-12	1.250	0.38	1			0.850	0.600	3.68	1.08	1.12

CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-F-52525/5

MAXIM RESSURES OF "A" COUPLINGS

HOSE I.D. (REF)		3/8	1/2	3/4
PRESSURE	50	2,250	2,000	1,250

TABLE III
OVER-TIGHTENING TORQUE FOR SWIVEL NUT

DASH NO.	NOM TUBE/O.D. REF	TORQUE
-5	5/16	180 INCH POUNDS
-6	3/8	250 INCH POUNDS
-8	1/2	425 INCH POUNDS
-10	5/8	590 INCH POUNDS
-12	3/4	850 INCH POUNDS

REVIEW ACTIVITIES:
USER ACTIVITIES: MU, WC, SH, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 23 DECEMBER 1970 (A) 25 October 1978

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37°FLARE, STRAIGHT, SINGLE WIRE BRAID HOSE	MILITARY STANDARD MS 39341
PROCUREMENT SPECIFICATIONS MIL-C-52525 (ME)	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5308

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.