FED. SUP CLASS
2640

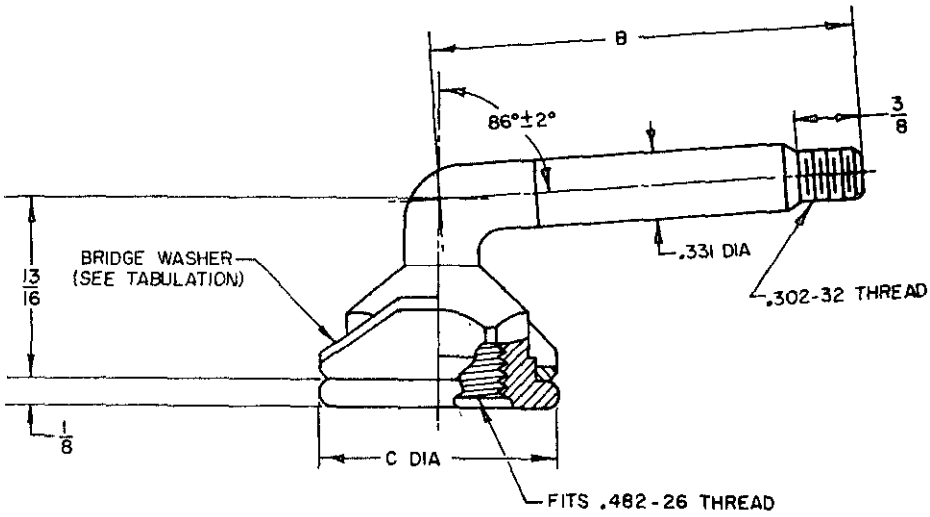

TYPE I, CLASS 10 OF PROCUREMENT SPECIFICATION

MS PART NO.	TR IDENT NO.	DIMENSIONS		BRIDGE WASHER
		B	C DIA	
MS 51366 - 1	TR-1075 A	3	59/64	MS 52117-1
MS 51366 - 2	TR-1076 A	3 - 3/8	59/64	MS 52117-1
MS 51366 - 3	TR-1177 A	3 - 3/4	1 - 1/16	MS 52117-2
MS 51366 - 4	TR-1077 A	4 - 1/8	1 - 1/16	MS 52117-2
MS 51366 - 5	TR-1175 A	4 - 1/2	1 - 1/16	MS 52117-2
MS 51366 - 6	TR-1078 A	5	1 - 1/16	MS 52117-3
MS 51366 - 7	TR-1179 A	5 - 9/16	1 - 1/16	MS 52117-4

TR DENOTES TIRE AND RIM ASSOCIATION

Ⓒ

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. DIMENSIONS SHOWN ARE IN INCHES.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.

Ⓓ CANCELLED AFTER 23 FEBRUARY 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEARBOOK AS SPECIFIED IN ZZ-V-25

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 12 AUGUST 1971 (D) 23 FEBRUARY 1976

USER ACTIVITIES: ARMY-MI, ME; NAVY-MC

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-YD 4F-84	TITLE VALVE, PNEUMATIC TIRE, INNER TUBE: REPAIR, SCREW-ON, STD. BORE, BENT 86°, VEHICULAR	MILITARY STANDARD MS51366
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.