FED. SUP CLASS
2640

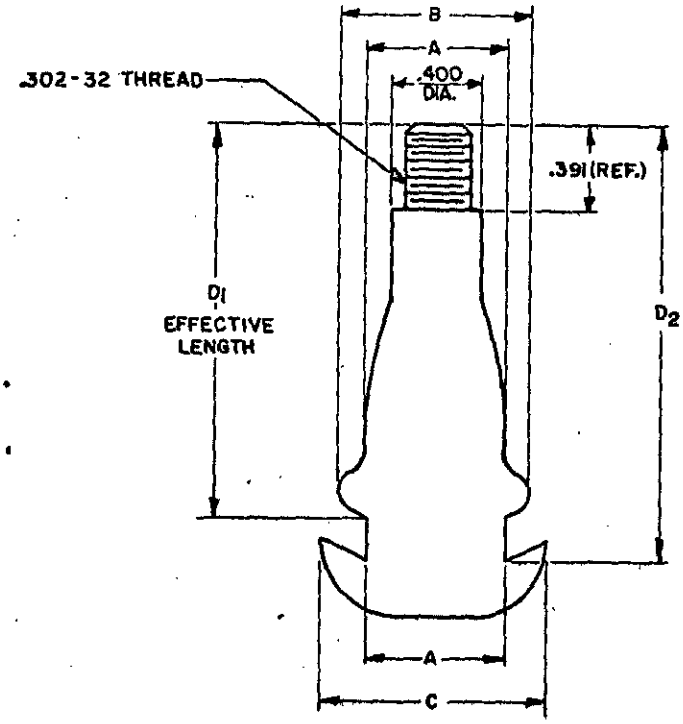

TYPE II, CLASS 1-OF PROCUREMENT SPECIFICATION

© CANCELLED AFTER 23 DEC. 1975

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEARBOOK PER ZZ-V-25

MS PART NO.	TR IDENT NO.	RIM HOLE DIA.	A	B MAX	C MAX	D_1	D_2
MS51367-1	TR-413	.453	.600	.660	.781	1-1/4	1-3/8
MS51367-2	TR-414	.453	.600	.660	.781	1-1/2	1-5/8
MS51367-3	TR-415	.625	.768	.820	1.000	1-1/4	1-3/8
MS51367-4	TR-418	.453	.600	.660	.781	2	2-1/8
MS51367-5	TR-423	.453	.600	.660	.781	2-1/2	2-5/8
MS51367-6	TR-425	.625	.768	.820	1.000	2	2-1/8
MS51367-7	TR-420	.625	.768	.820	1.000	1-3/4	1-7/8

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. DIMENSIONS SHOWN ARE IN INCHES.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

Ⓑ ENTIRE STANDARD REVISED

APPROVED 23 MARCH 1961 REVISED Ⓐ 28 JUNE 1963 Ⓑ 12 APRIL 1967 Ⓒ 23 DEC 1975

USER ACTIVITIES: ARMY-MI, M

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE: TUBELESS, SNAP-IN, STD. BORE, STRAIGHT, VEHICULAR	MILITARY STANDARD MS51367
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinating) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

2640-0137