FED SUP CLASS
5305

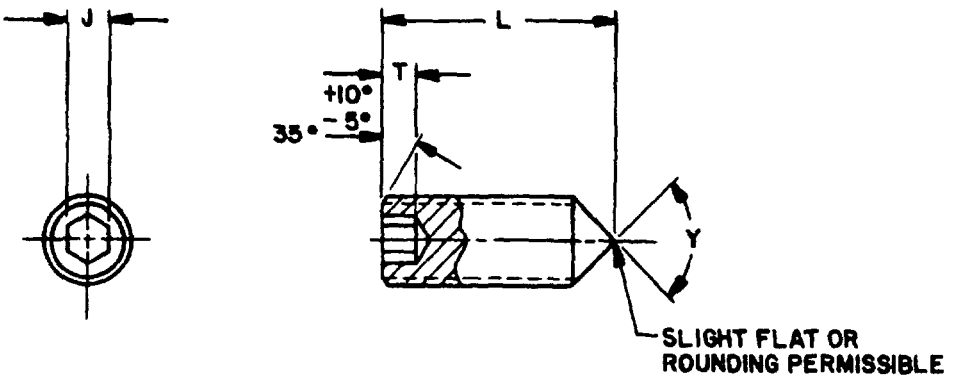

TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE	.250
THREADS PER INCH UNC - 3A	20
J - SOCKET WIDTH ACROSS FLATS NOM	.125
Y - CONE POINT ANGLE 118° +2° FOR LENGTH UNDER 90° +2° FOR THIS LENGTH AND OVER	.312
T - KEY ENGAGEMENT MIN	.125
L - LENGTH	DASH NO
.250 +.010 .375 ±.010 .500 ±.010	1 2 3

REQUIREMENTS

1. MATERIAL. ALLOY STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. HARDNESS. 45-53HRC
3. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 µm), TYPE II.
4. THREADS THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.
5. PART NUMBER THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS51482-1 - SETSCREW, HEXAGON SOCKET, CONE POINT, ALLOY STEEL, .250-20UNC-3A, LENGTH .250, ZINC COATED

NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES
ARMY-ME,MI

REVIEWER ACTIVITIES
ARMY-AV,CR,EA
AIR FORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84
REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AR Other Cust SH 99		SETSCREW, HEXAGON SOCKET, CONE POINT, ALLOY STEEL, UNC-3A	MS51482
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES		PAGE 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.