FED. SUP CLASS
4730

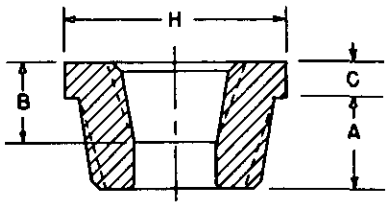

OUTSIDE HEAD



INSIDE HEAD

DASH NO.	PIPE SIZE NOMINAL	A LENGTH OF EXTERNAL THREAD MIN	B LENGTH OF INTERNAL THREAD MIN	C HEIGHT OF HEAD MIN	H WIDTH OF HEAD MIN OUTSIDE	H WIDTH OF HEAD MIN INSIDE	G * METAL THICKNESS
1	1/4 x 1/8	.44	.26	.14	.64		
2	3/8 x 1/4	.48	.40	.16	.68		
3	3/8 x 1/8	.48	.25	.16	.68		
4	1/2 x 3/8	.56	.41	.19	.87		
5	1/2 x 1/4	.56	.32	.19	.87		
6	1/2 x 1/8	.56	.25	.19	.87		
7	3/4 x 1/2	.63	.53	.22	1.15		
8	3/4 x 3/8	.63	.36	.22	1.15		
9	3/4 x 1/4	.63	.32	.22	1.15		
10	1 x 3/4	.75	.50	.25	1.42		
11	1 x 1/2	.75	.43	.25	1.42		
12	1 x 3/8	.75	.36	.30		1.12	
13	1 x 1/4	.75	.32	.30		1.12	
14	1-1/4 x 1	.80	.58	.28	1.76		
15	1-1/4 x 3/4	.80	.50	.28	1.76		
16	1-1/4 x 1/2	.80	.43	.34		1.34	.185
17	1-1/4 x 3/8	.80	.36	.34		1.12	.185
18	1-1/2 x 1-1/4	.83	.71	.31	2.00		
19	1-1/2 x 1	.83	.58	.31	2.00		
20	1-1/2 x 3/4	.83	.50	.37		1.63	.200
21	1-1/2 x 1/2	.83	.43	.37		1.34	.200
22	2 x 1-1/2	.88	.70	.34	2.48		
23	2 x 1-1/4	.88	.67	.34	2.48		
24	2 x 1	.88	.58	.41		1.95	.220
25	2 x 3/4	.88	.50	.41		1.63	.220
26	2 x 1/2	.88	.43	.41		1.34	.220
(A) 27	2-1/2 x 2	1.07	.75	.37	2.98		
28	2-1/2 x 1-1/2	1.07	.70	.44	2.68		
29	2-1/2 x 1-1/4	1.07	.67	.44		2.39	.240
30	2-1/2 x 1	1.07	.58	.44		1.95	.240
31	3 x 2-1/2	1.13	.92	.40	3.86		
32	3 x 2	1.13	.75	.48	3.28		
33	3 x 1-1/2	1.13	.70	.48		2.68	.260
34	3 x 1-1/4	1.13	.67	.48		2.39	.260
35	4 x 3	1.22	.98	.50	4.62		

NOTES:
1. MATERIAL: Brass or bronze in accordance with the procurement specification.
2. PROTECTIVE COATING: None.
3. DIMENSIONS: All dimensions are in accordance with ANSI B16.15.
4. THREADS: The threads shall be American Standard Pipe Threads (NPT) in accordance with Screw-Thread Standards for Federal Service, Handbook H-28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51847-1.
6. The heads of the bushings shall be either hexagonal or octagonal.
7. Bushings reducing to pipe sizes smaller than given are bushed from the smallest reduction appearing in the table.
8. These bushings are for use in application where pressures do not exceed 125 pounds.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitations for bid.
11. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
* 12. Metal thickness at no point shall be less than 90 percent of the thickness given in the tables.

CANCELLED
For procurement use MS14345

(A) FULLY COORDINATED

P.A. WC Other Cust YD 82	TITLE BUSHING, PIPE, SHOULDER	MILITARY STANDARD MS 51847
PROCUREMENT SPECIFICATION (A) WW-P-460	SUPERSEDES: CPHX3	SHEET 1 OF 1

DD FORM SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEWER: CS,GL,ME,MU
USER: AT,MC,MI

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 22 NOV 67 REVISED (A) 26 NOV 1973 (B) 31 January 1983

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.