FED. SUP CLASS 5320

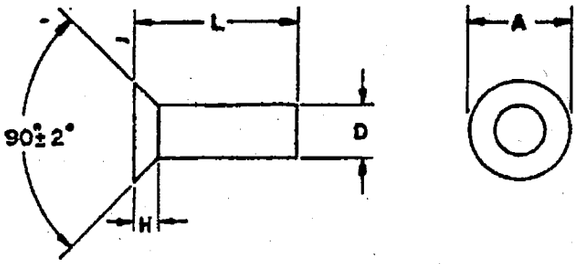

BODY DIAMETER D		NOM MAX MIN	3/32 0.096 .090	1/8 0.127 .121	5/32 0.158 .152	3/16 0.191 .182	1/4 0.253 .244	5/16 0.316 .304	3/8 0.380 .365
HEAD DIAMETER A		MAX MIN MIN	.176 .171 .163	.235 .227 .217	.293 .284 .272	.351 .340 .326	.469 .455 .437	.588 .569 .547	.704 .682 .656
HEAD HEIGHT[2] H			.040	.053	.066	.079	.106	.133	.159
LENGTH	L		BRASS DASH NUMBER						
1/4	0.250		1	15					
5/16	0.312			16		44			
3/8	0.375			17					
7/16	0.438		4	18	32				
1/2	0.500			19		47			
9/16	0.562				34				
5/8	0.625		7	21		49			
3/4	0.750		8			50	63		
7/8	0.875			23					
1	1.000						65		
1-3/8	1.375			25		53			
2	2.000					54			
2-1/4	2.250					55			
3	3.000					56			
LENGTH	L		COPPER DASH NUMBER						
3/16	0.188			115					
1/4	0.250			116		142			
3/8	0.375			117		143			
1/2	0.500			118		144	157		
5/8	0.625			119		145	158		
3/4	0.750			120		146	159	172	
7/8	0.875					147	160	173	
1	1.000					148	161	174	187
1-1/4	1.250					149	162	175	188
1-1/2	1.500						163	176	189
1-3/4	1.750					151	164	177	190
2	2.000						165	178	
2-1/2	2.500			127					

1. Because the heads of these rivets are not machined or trimmed, the circumference may be somewhat irregular and edges may be round or flat.

2. For reference only. Variations are controlled by the diameters (A) and (D) and the included angle of the head.

NOTES:
1. MATERIAL: Brass, per QQ-W-321, composition 260 or 270, quarter hard.
   Copper, per QQ-W-343, type S.
2. PROTECTIVE COATING: Uncoated.
3. HARDNESS: Maximum Rockwell hardness shall not exceed B60 as measured on side of shank.
4. DIMENSIONS: All dimensions are in inches.
5. TOLERANCES: Length L ±0.016 in.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   Example: MS51945-1
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) ENTIRE STANDARD REVISED

APPROVED 24 JUNE 1963 REVISED (A) 7 JULY 1970

REVIEW: GL, IS, MI, MU, NSA
USAF: AS, EL, NC, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust YD	TITLE RIVET, SOLID-COUNTERSUNK HEAD BRASS OR COPPER	MILITARY STANDARD MS51945
PROCUREMENT SPECIFICATION FF-R-556	SUPERSEDES: BMHX2	SHEET 1 OF 1

DD FORM 1000 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.