INCH-POUND

MIL-DTL-11484/32E
16 February 2000
SUPERSEDING
MIL-DTL-11484/32D
27 September 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, DISTINGUISHED CIVILIAN SERVICE AWARD, NAVY

Inactive for new design after 20 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

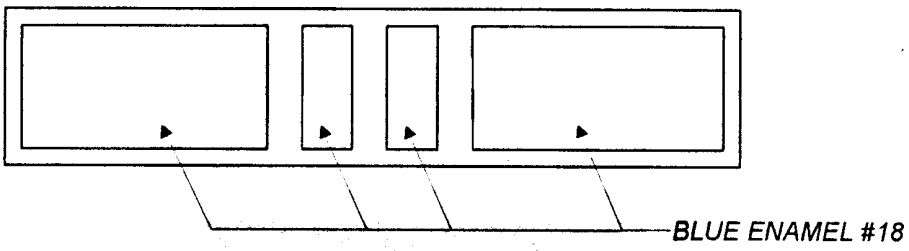

MATERIAL: Gilding Medal

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT (overall): 9/64 inch (REF)
WIDTH (overall): 21/32 inch (REF)
THICKNESS (at edge): 0.065 inch ± 0.005 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be blue as indicated. The color shall conform to TIOH Hard Enamel Color Chip number 18.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, the material requirement shall be gilding metal or red brass.

4. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-1006)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.