NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/34E
27 September 1996
SUPERSEDING
MIL-L-11484/34D
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, MERITORIOUS CIVILIAN SERVICE AWARD, NATIONAL SECURITY AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

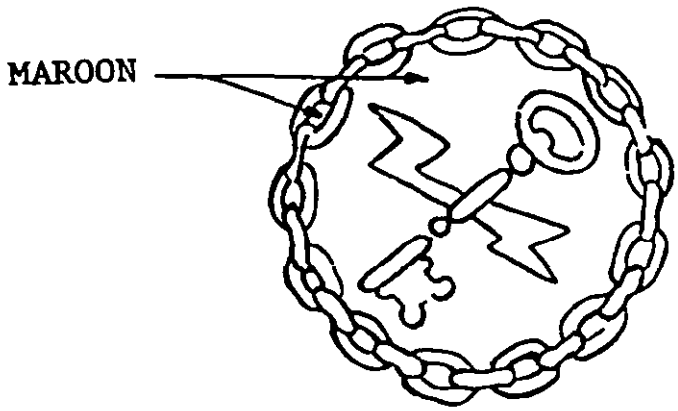

MATERIAL: Gilding Metal

DASH NO.
-1: 1ST AWARD
-2: 2ND AWARD

FINISH:

-1: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: BASE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
STAR: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:

-1, -2: CIRCUMSCRIBED DIAMETER: 1/2 inch (1.27 cm) (REF)
THICKNESS (At Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

STAR DEVICE (Used on -2 only);

-2: CIRCUMSCRIBED DIAMETER: 3/16 inch (0.48 cm) (REF)
THICKNESS (Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled area shall be maroon as indicated. The color shall conform to the TIOH color chip number 6 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Dash -2 (2ND AWARD) shall consist of the first award plus a 3/16 inch (0.48 cm) circumscribed diameter gold plated star which shall be located on the vertical center line of the lapel button 3/32 inch (0.24 cm) below the top edge. The star shall be positioned so that the single point of the star is vertical and shall be secured to the base by a rivet.

5. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
NSA - NS

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.