NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/34G
9 July 2020
SUPERSEDING
MIL-DTL-11484/34F
8 September 2015

DETAIL SPECIFICATION SHEET

# LAPEL BUTTON, MERITORIOUS CIVILIAN SERVICE AWARD, NATIONAL SECURITY AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

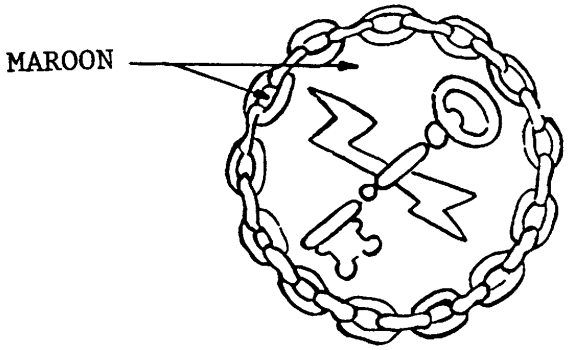


DASH NO.
-1: 1st Award
-2: 2nd Award

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-2: BASE: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like polished and shall match TIOH Metal Finish Chip Number 6.
STAR: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like polished and shall match TIOH Metal Finish Chip Number 6.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.

DIMENSION:
BASE:
-1, -2: CIRCUMSCRIBED DIAMETER: 1/2 inch (REF)
THICKNESS (At edge): 0.065 inch ± 0.005 inch
STARDEVICE (Used on -2 only):
-2: CIRCUMSCRIBED DIAMETER: 3/16 inch (REF)
THICKNESS (Thickest point): 0.060 inch ± 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be a prong with pick and flat ball clutch.

2. The prong shall be centered on the reverse side and fused or hard soldered to the lapel button.

NOTES:
1: The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2: -2 (2nd Award) shall consist of the first award plus a 3/16 inch circumscribed diameter gold plated star which shall be located on the vertical center line of the lapel button 3/32 inch below the top edge. The star shall be positioned so that the single point of the star is vertical and shall be secured to the base by a rivet.

3: If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below

| TIOH HARD ENAMEL COLOR CHIPS | |
|---|---|
| **COLOR** | **CHIP NUMBER** |
| Maroon | #6 |

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
NSA - NS

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-390)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:15Z
Check the source to verify that this is the current version before use.