NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/38H
9 July 2020
SUPERSEDING
MIL-DTL-11484/38G
8 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, SUPERIOR CIVILIAN SERVICE AWARD, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484.

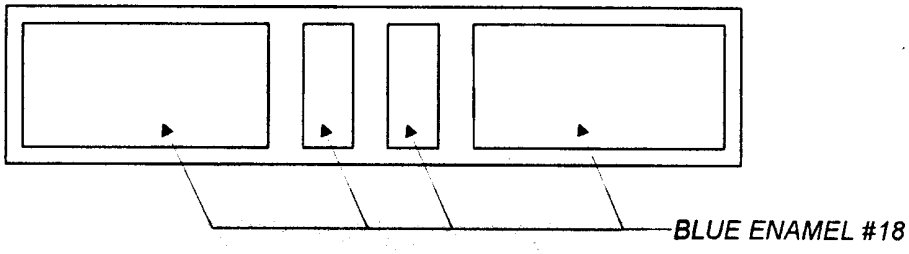

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall): 9/64 inch (REF)
WIDTH (Overall): 21/32 inch (REF)
THICKNESS (At edge): 0.065 inch ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Epoxy resin areas shall be blue as indicated. The color must conform to The Institute of Heraldry (TIOH) Hard Enamel Color Chip number 18. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:16Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-393)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:16Z
Check the source to verify that this is the current version before use.