MILITARY SPECIFICATION

FABRICS, NONWOVEN, SURGICAL PACKS, DISPOSABLE

This amendment forms a part of Military Specification MIL-F-36901A, dated 3 June 1974 and is approved for use by all Departments and Agencies of the Department of Defense.

Page 4

3.2 Color, line 2: After "grey-green" add "blue-grey".

Page 5

Table I - AS RECEIVED REQUIREMENTS, in the "CHARACTERISTICS" column, line 20: Change "Filling" to "Pilling".

Page 6

4.2.1 Visual examination of the base fabric: Delete the last three sentences.

Page 7

Table II, Sample size: Delete entirely.

Table III Test Methods, lines 3 and 4 in the "Test Method" column: After "NFPA-56A" add "3/".

Page 8

Top of page, add below footnote "2/", the following:

"3/ The apparatus used to determine the surface resistivity shall conform to Figure 1 and shall weigh 300 ± 25 grams. The test plate, upon which the test specimen shall be placed, shall be Teflon a minimum of 1/4 inch thick and one foot square. The test plate surface shall be clean, flat and smooth and free from dents, pits, scratches and any foreign matter".

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:32Z
Check the source to verify that this is the current version before use.

Add Figure 1, Surface Resistivity Apparatus.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6530-1364
is

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:32Z
Check the source to verify that this is the current version before use.

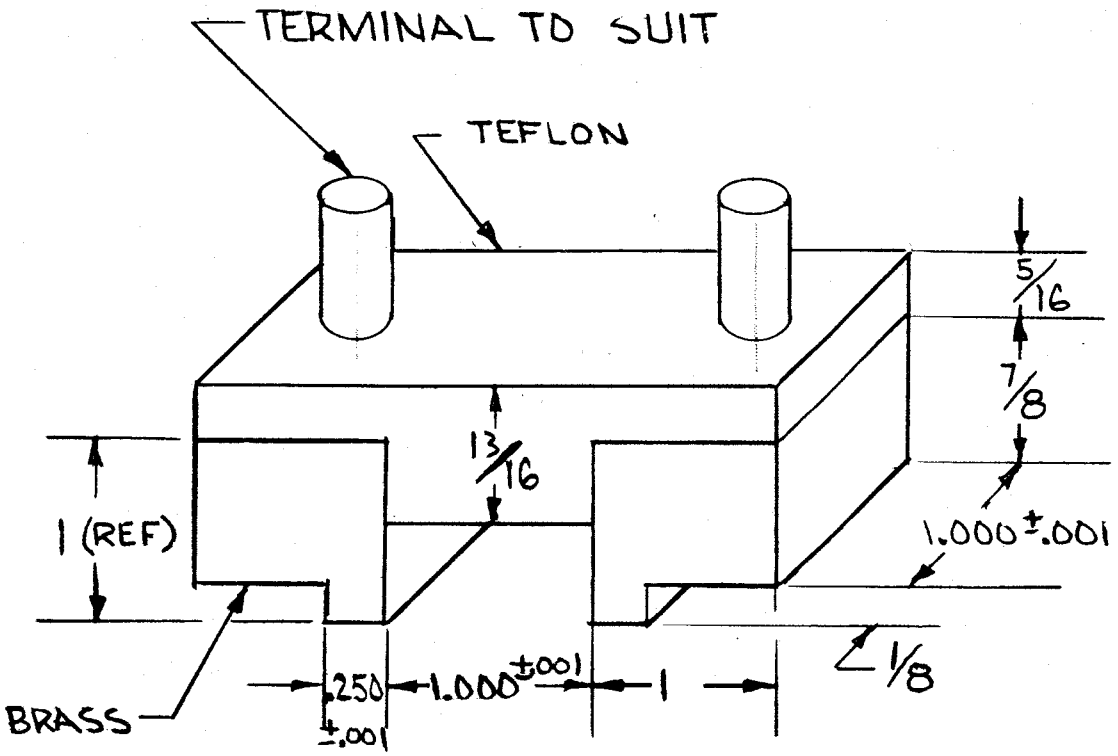

FRACTIONAL DIMENSIONS NOT CRITICAL
WITHIN OVERALL WEIGHT REQUIREMENTS

SURFACE RESISTIVITY APPARATUS

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:32Z
Check the source to verify that this is the current version before use.