
MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, BASIC; MARINE CORPS, PENDANT AND SUSPENSION BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

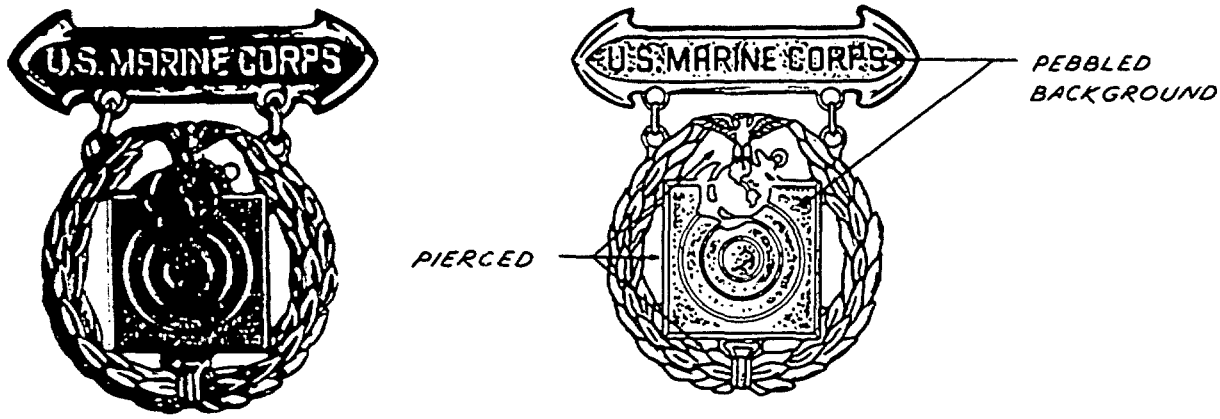

MATERIAL: RED BRASS

DIMENSIONS (INCHES):

PENDANT:
- HEIGHT (OVERALL): 1-1/4 (REF)
- WIDTH (OVERALL): 1-3/16 (REF)
- THICKNESS (OVER GLOBE): .110 ± .005

BAR:
- HEIGHT (INCLUDING LUGS): 27/64 (REF)
- WIDTH (OVERALL): 1-1/2 (REF)
- THICKNESS (EDGE): .060 ± .005

FINISH: MIRROR-LIKE POLISHED, HOT NICKEL PLATED, RHODIUM PLATED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. LUGS SHALL BE INTEGRAL.
2. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. TWO PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTER LINE OF THE SUSPENSION BAR ONE INCH ON CENTERS WITH THE PRONGS EQUIDISTANT FROM EACH END.
3. LUGS SHALL BE LOCATED EQUIDISTANT FROM EACH SIDE AND .675, +.015, -.000 INCH ON CENTERS.
4. THE OUTSIDE DIAMETER OF THE LUG SHALL BE .125 ± .005 INCH AND THE DIAMETER OF THE HOLE THROUGH THE LUG SHALL BE .060 ± .005 INCH.
5. THE BASIC BADGE COVERED BY THIS SHEET IS USED IN CONJUNCTION WITH BADGE CLASPS SPECIFIED ON SPECIFICATION SHEET MIL-B-3628/20.

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033.90852

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:53Z
Check the source to verify that this is the current version before use.