
MILITARY SPECIFICATION SHEET

Badge, Qualification, RIFLE, MARINE CORPS; Pendant and Suspension Bar


This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.




-1

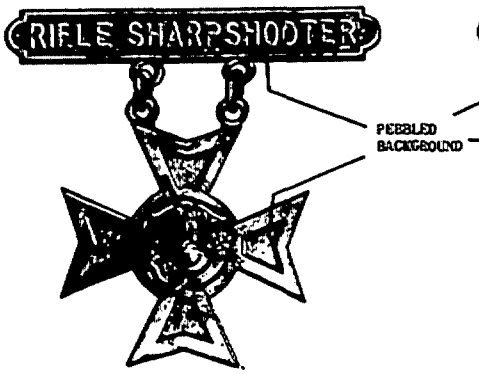

-2

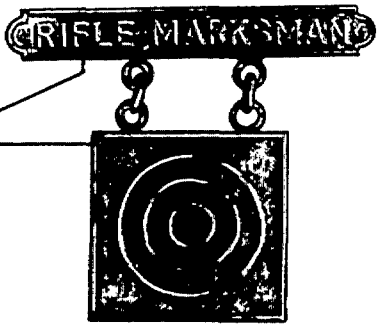

-3

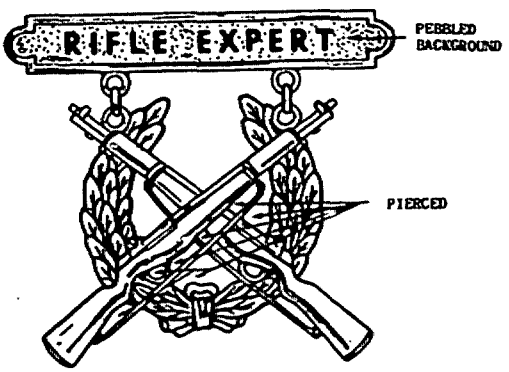

DASH NO.

-1: RIFLE EXPERT
-2: RIFLE SHARPSHOOTER
-3: RIFLE MARKSMAN

MATERIAL: RED BRASS

DIMENSIONS (INCHES):
PENDANTS:
HEIGHT:
-1: 1-5/16 (REF)
-2: 1-7/16 (REF)
-3: 1-5/32 (REF) (INCLUDING LUG)
THICKNESS:
-1 (AT THICKEST POINT): .100 ± .005
-2 (AT RIM): .070 ± .005 (TOTAL AT CENTER): .190 ± .005
-3 (AT CENTER): .070 ± .005

SUSPENSION BAR:
HEIGHT: 9/32 (REF)
WIDTH: 1-29/32 (REF)
THICKNESS (AT RIM): .060 ± .005

FINISH:
OBVERSE AND REVERSE: MIRROR-LIKE POLISHED, HOT NICKEL PLATED, RHODIUM PLATED

NOTES:
1. ALL LUGS ARE INTEGRAL.

2. BADGE CLASPS COVERED BY SPECIFICATION SHEET MIL-B-3628/18 SHALL BE USED WITH DASH NO. 1 OF THIS SHEET.

3. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE OF THE BAR EQUIDISTANT FROM THE ENDS AND 1-1/2 INCH ± 1/16 INCH ON CENTERS.

4. THE MARINE CORPS EMBLEM SHALL BE PIERCED BETWEEN THE ANCHOR AND GLOBE.

5. THE MARINE CORPS EMBLEM SHALL BE CIRCUMSCRIBED IN A 1/2 INCH DIAMETER CIRCLE AND SHALL BE SOFT SOLDERED TO THE TARGET AREA OF THE CROSS AFTER TRIMMING AND PIERCING.

6. LUGS FOR BAR AND PENDANT SHALL BE LOCATED EQUIDISTANT FROM THE ENDS OF THE BAR AND PENDANT. THE DISTANCE CENTER TO CENTER OF THE LUGS SHALL BE AS FOLLOWS:

-1: 7/8 ± 1/64 INCH
-2: 1/2 ± 1/64 INCH
-3: 5/8 ± 1/64 INCH

CUSTODIAN:
NAVY - PE
REVIEW ACTIVITIES:
NAVY - PE, MC
OTHER - DP
USER ACTIVITY:
NAVY - MC

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

Project No. 8455-0131

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:52Z
Check the source to verify that this is the current version before use.