
MIL-B-3628/21E
26 April 1991
SUPERSEDING
MIL-B-3628/21D
10 February 1988

MILITARY SPECIFICATION SHEET

Badge, Qualification, Basic, Driver and Mechanic, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

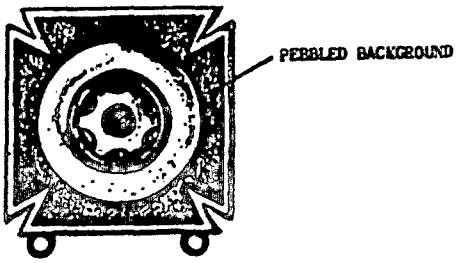

MATERIAL: Red brass or nickel silver

DIMENSIONS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 1 inch (2.54 cm) (REF)
THICKNESS (At rim): .070 inch ± .005 inch (0.177 ± 0.012 cm)

FINISH:
Nickel plated (red brass only), silver plated, oxidized, highlights satin finish with reverse and edges clean.

NOTES:
1. All lugs are integral.
2. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline, equidistant from the sides and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) on centers.
3. Referenced overall height dimension does not include lugs.
4. Lugs shall be located equidistant from each end and .675 inch ± .015 inch - .000 inch (1.71 cm ± 0.038 cm - 0 cm) on centers.
5. A forcer may be used to bring up the wheel.
6. The basic badge covered by this sheet shall be used in conjunction with the badge clasps covered by specification sheet MIL-3628/22.
7. Badge may be nickel or rhoduim plated with a mirror-like polished finish for commercial sale except the silver plating requirement shall not apply.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:53Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Review Activity:
DLA - CT

Preparing Activity:
Army - IH

(Projected No. 8455-0586)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:53Z
Check the source to verify that this is the current version before use.