NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/23G
15 November 1996
SUPERSEDING
MIL-B-3628/23F
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXPERT INFANTRYMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

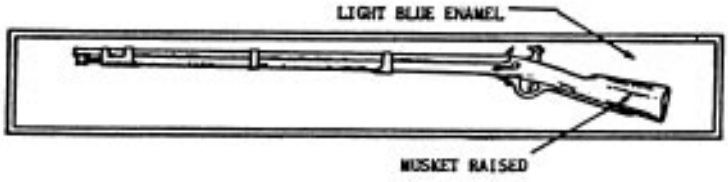

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size, Subdued

MATERIAL: Red Brass or Nickel Silver

FINISH:
-1, -2, -3: Soft Enameled, Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-4: Dull, Flat Black Enamel Finish.

DIMENSIONS:
HEIGHT (Overall):
-1, -4: 7/16 inch (1.11 cm) (REF)
-2: 3/8 inch (0.95 cm) (REF)
-3: 3/16 inch (0.48 cm) (REF)
WIDTH: (Overall):
-1, -4: 3 inches (7.62 cm) (REF)
-2: 1-3/4 inches (4.45 cm) (REF)
-3: 1-1/4 inches (3.18 cm) (REF)
THICKNESS (At Edge): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be light blue soft enamel and shall conform to TIOH Color Chip No. 30 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of soft enamel at the option of the manufacturer. Epoxy resin shall be smooth and flush with the bottom edge of the rifle. The epoxy need not be stoned.

4. The dull, flat black enamel for Dash No. -4 shall match FED-STD-595, Chip Number 37038.

5. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line and equidistant from each end. For regular size, the prongs shall be 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart. For miniature size and dress miniatures, the prongs shall be 1 inch ± 1/64 inch (2.54 cm ± 0.04 cm) apart.

6. A forcer may be used to bring up the musket only.

7. Dash No. -1, -2 and -3 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale and shall match TIOH Metal Finish Chip Number 16. The silver plating requirement shall not apply for nickel or rhodium plated insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.