INCH-POUND

MIL-DTL-3628/23H
7 April 2014
SUPERSEDING
MIL-DTL-3628/23G
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXPERT INFANTRYMAN, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

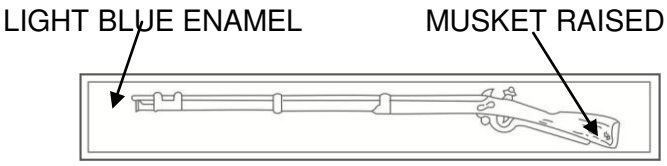

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size Subdued

MATERIAL: (-1 through -4): Red Brass 85/15 (UNS Alloy No. C-230), or Nickel Silver 65/35 (UNS Alloy C-752)

FINISH:
1: (-1 through -3): Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver: Nickel Plated (C-230 only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

2: -4: Red Brass 85/15 (UNS Alloy No. C-230), Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (Overall):
-1, -4: 7/16 inch (REF)
-2: 3/8 inch (REF)
-3: 3/16 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
-1, -4: 3 inches (REF)
-2: 1-3/4 inches (REF)
-3: 1-1/4 inches (REF)
THICKNESS: (At rim of cross): 0.060 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and clutch type.

2. The prongs shall be located on the horizontal center line and equidistant from each end. The prongs shall be 2 inches + 1/64 inch apart for -1 through -4. For -2 and -3, the prongs shall be 1 inch + 1/64 inch apart.

EPOXY: Epoxy resin shall be light blue shall match TIOH Color Chip No. 30. Epoxy resin shall be smooth and flush with the bottom edge of the rifle. The epoxy need not be stoned.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A forcer may be used to bring up the musket only.

3. -1, -2 and -3 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale and shall match TIOH Metal Finish Chip Number 16. The silver plating requirement shall not apply for nickel or rhodium plated insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-097)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.