INCH-POUND


MIL-DTL-3628/23J
30 November 2015
SUPERSEDING
MIL-DTL-3628/23H
7 April 2014

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXPERT INFANTRYMAN, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

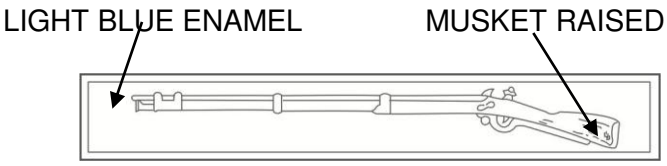

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size Subdued

MATERIAL: (-1 through -3): Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

FINISH:
-1 through -3: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-4: Dull, Flat Black Enamel Finish TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (overall):
-1, -4: 7/16 inch (REF)
-2: 3/8 inch (REF)
-3: 3/16 inch (REF)
WIDTH (overall):
-1, -4: 3 inches (REF)
-2: 1-3/4 inches (REF)
-3: 1-1/4 inches (REF)
THICKNESS: (at rim of cross): 0.060 inch $\pm$ 0.005 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE AND LUG:

1. The attaching device shall be prong and wing type clutch.

2. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch ± 1/32 inch. Apart for -1 and 3/4 inch ± 1/32 inch apart for -2 and -3.

3. The lug shall have an outside diameter of 0.125 inch ± 0.005 inch.

4. The thickness of the lug shall be approximately 0.060 inch. Each lug shall have a 0.055 inch ± 0.005 inch Diameter hole centered in the lug. All lugs shall be an integral part of the item.

5. At the option of the manufacturer, the lug may be cut into the working die or may be formed from salvage during the trimming operation.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercings shall be as indicated.

3. Badges covered by this specification sheet shall be used in conjunction with badge clasps covered in specification sheet, MIL-DTL-3628/15.

4. Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army – IH

Review activity:
DLA - CT

(Project No. 8455-2016-109)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:54Z
Check the source to verify that this is the current version before use.