
MIL-B-3628 / 24E
10 February 1988
SUPERSEDING
MIL-B-3628 / 24D
21 April 1972

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT INFANTRYMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

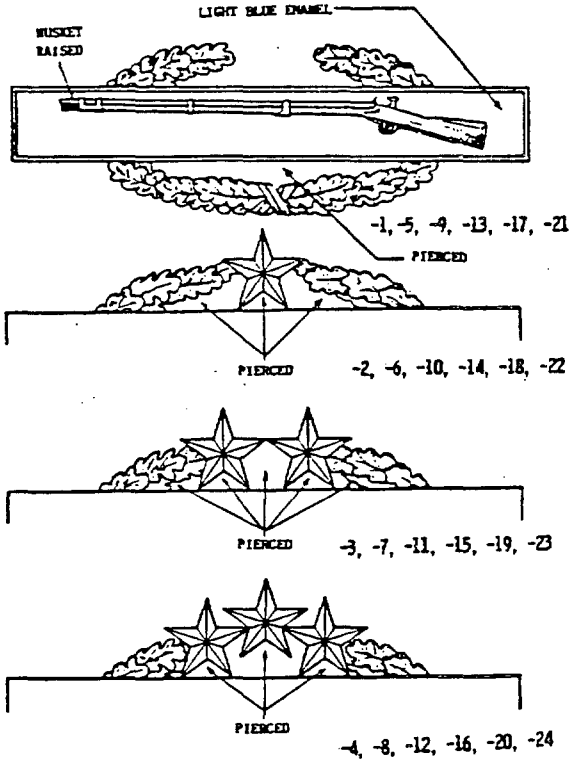

DASH NOS:

-1:	1ST AWARD, SILVER, REGULAR SIZE
-2:	2ND AWARD, SILVER, REGULAR SIZE
-3:	3RD AWARD, SILVER, REGULAR SIZE
-4:	4TH AWARD, SILVER, REGULAR SIZE
-5:	5TH AWARD, GOLD, REGULAR SIZE
-6:	6TH AWARD, GOLD, REGULAR SIZE
-7:	7TH AWARD, GOLD, REGULAR SIZE
-8:	8TH AWARD, GOLD, REGULAR SIZE
-9:	1ST AWARD, SILVER, MINIATURE SIZE
-10:	2ND AWARD, SILVER, MINIATURE SIZE
-11:	3RD AWARD, SILVER, MINIATURE SIZE
-12:	4TH AWARD, SILVER, MINIATURE SIZE
-13:	5TH AWARD, GOLD, MINIATURE SIZE
-14:	6TH AWARD, GOLD, MINIATURE SIZE
-15:	7TH AWARD, GOLD, MINIATURE SIZE
-16:	8TH AWARD, GOLD, MINIATURE SIZE
-17:	1ST AWARD, SILVER, DRESS MINIATURE
-18:	2ND AWARD, SILVER, DRESS MINIATURE
-19:	3RD AWARD, SILVER, DRESS MINIATURE
-20:	4TH AWARD, SILVER, DRESS MINIATURE
-21:	1ST AWARD, SUBDUED, REGULAR SIZE
-22:	2ND AWARD, SUBDUED, REGULAR SIZE
-23:	3RD AWARD, SUBDUED, REGULAR SIZE
-24:	4TH AWARD, SUBDUED, REGULAR SIZE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

MATERIAL: RED BRASS OR NICKEL SILVER
DIMENSIONS (INCHES):
HEIGHT (OVERALL):

-1,-5,-21:	1 (REF)	-9,-13:	13/16 (REF)
-4,-8,-24:	1-5/16 (REF)	-12,-16:	1-1/64 (REF)
-18,-19:	1/2 (REF)	-17:	7/16 (REF)
-10,-11,-14,-15:	61/64 (REF)	-20:	9/16 (REF)
-2,-3,-6,-7,-22,-23:	1-13/64 (REF)		

WIDTH (OVERALL):

-1 THRU -8, -21 THRU -24:	3 (REF)
-9 THRU -16:	1-3/4 (REF)
-17 THRU -20:	1-1/4 (REF)

THICKNESS (AT EDGE OF BADGE): .060 ± .005

FINISH:

-1 THRU -4, -9 THRU -12, -17 THRU -20:	FRAME SOFT ENAMELED, NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, HIGHLIGHTS OF WREATH, MUSKET AND RIM SATIN FINISH, STAR(S) MIRROR-LIKE POLISHED (WHEN APPLICABLE), REVERSE AND EDGES CLEAN.
-5 THRU -8, -13 THRU -16:	
WREATH:	SHADED, GOLD PLATED
STAR(S) (WHEN APPLICABLE):	GOLD PLATED, MIRROR-LIKE POLISHED
FRAME:	SOFT ENAMELED, GOLD PLATED, MUSKET AND RIM SATIN FINISH
-21,-22,-23,-24:	DULL, FLAT BLACK ENAMEL FINISH

NOTES:

1. ENAMEL SHALL BE SOFT ENAMEL AND SHALL BE LIGHT BLUE IN COLOR. THE ENAMEL SHALL MATCH THE ENAMEL COLOR OF THE STANDARD SAMPLE OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIP NO. 30.

2. DASH NOS. 1 THRU 4, 9 THRU 12 AND 17 THRU 20 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE WEIGHT SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENT FOR SILVER PLATING SHALL NOT APPLY:

   WEIGHT (MINIMUM)

-1:	250 GRAINS	-9:	155 GRAINS	-17:	55 GRAINS
-2:	265 GRAINS	-10:	165 GRAINS	-18:	60 GRAINS
-3:	280 GRAINS	-11:	175 GRAINS	-19:	60 GRAINS
-4:	295 GRAINS	-12:	185 GRAINS	-20:	60 GRAINS

3. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FROM EACH END. FOR REGULAR SIZE THE PRONGS SHALL BE 2 ± 1/64 INCH ON CENTERS. FOR MINIATURE SIZE AND DRESS MINIATURES THE PRONGS SHALL BE 1 ± 1/64 INCH ON CENTERS.

4. A FORCER MAY BE USED TO BRING UP THE MUSKET ONLY.

5. PIERCED AREAS FOR THE DRESS MINIATURES SHALL BE AS INDICATED BELOW:

   -17: AS INDICATED
   -18: AS INDICATED EXCEPT NO PIERCING UNDER STAR
   -19: BETWEEN THE TWO STARS ONLY (CENTER AREA)
   -20: BETWEEN THE THREE STARS ONLY (CENTER AREA)

Custodian:
Army - IH
Review activities:
DLA - CT

Preparing activity:
Army - IH
(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.