NOT MEASUREMENT SENSITIVE


MIL-B-3628/24F
1 June 1991
SUPERSEDING
MIL-B-3628/24E
10 February 1988

MILITARY SPECIFICATION SHEET

Badge, Qualification, Combat Infantryman, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

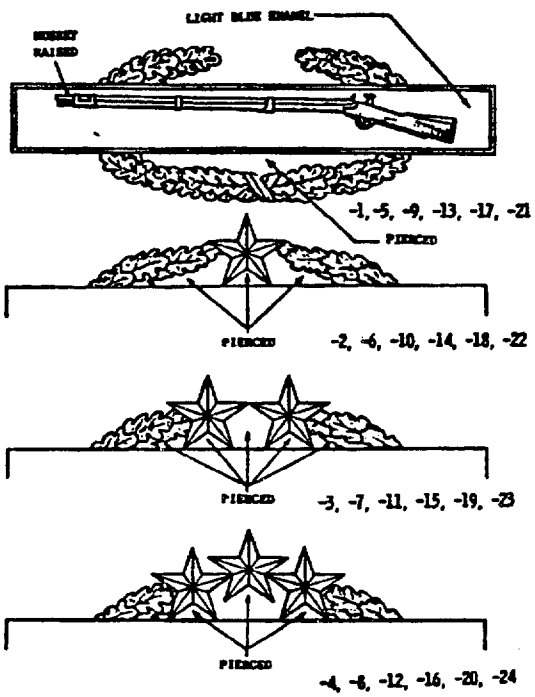

DASH NO:

-1:	1st Award, Silver, Regular Size
-2:	2nd Award, Silver, Regular Size
-3:	3rd Award, Silver, Regular Size
-4:	4th Award, Silver, Regular Size
-5:	5th Award, Gold, Regular Size
-6:	6th Award, Gold, Regular Size
-7:	7th Award, Gold, Regular Size
-8:	8th Award, Gold, Regular Size
-9:	1st Award, Silver, Miniature Size
-10:	2nd Award, Silver, Miniature Size
-11:	3rd Award, Silver, Miniature Size
-12:	4th Award, Silver, Miniature Size
-13:	5th Award, Gold, Miniature Size
-14:	6th Award, Gold, Miniature Size
-15:	7th Award, Gold, Miniature Size
-16:	8th Award, Gold, Miniature Size
-17:	1st Award, Silver, Dress Miniature
-18:	2nd Award, Silver, Dress Miniature
-19:	3rd Award, Silver, Dress Miniature
-20:	4th Award, Silver, Dress Miniature
-21:	1st Award, Subdued, Regular Size
-22:	2nd Award, Subdued, Regular Size
-23:	3rd Award, Subdued, Regular Size
-24:	4th Award, Subdued, Regular Size

MATERIAL: Red brass or nickel silver

DIMENSIONS:

HEIGHT (Overall):

-1,-5,-21:	1 inch (2.54 cm) (REF)
-4,-8,-24:	1-5/16 inch (3.33 cm) (REF)
-18,-19:	1/2 inch (1.27 cm) (REF)
-10,-11,-14,-15:	61/64 inch (2.42 cm) (REF)
-2,-3,-6,-7,-22,-23:	1-13/16 inch (3.06 cm) (REF)
-9,-13:	13/16 inch (2.06 cm) (REF)
-12,-16:	1-1/64 inch (2.58 cm) (REF)
-17:	7/16 inch (1.11 cm) (REF)
-20:	9/16 inch (1.43 cm) (REF)

WIDTH: (Overall):

-1 thru -8, -21 thru -24:	3 inches (7.62 cm) (REF)
-9 thru -16:	1-3/4 inch (4.45 cm) (REF)
-1 thru -20:	1-1/4 inch (3.18 cm) (REF)

THICKNESS (At edge): .060 inch ± .005 inch (0.152 cm ± 0.012 cm)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

FINISH:

-1 thru -4, -9 thru -12, -17 thru -20:	Frame soft enameled, nickel plated (red brass only), silver plated, oxidized, relieved, matte finish, star(s) mirror-like polished (when applicable).
-5 thru -8, -13 thru 16:	
WREATH:	Shaded, gold plated.
STAR(S) (When applicable):	Gold plated, mirror-like polished.
FRAME:	Soft enameled, gold plated, matte finish.
-21,-22,-23,-24:	Dull, flat black enamel finish.

NOTES:

1. The enamel shall be light blue soft enamel and shall conform to TIOH Color Chip No. 30 or the standard sample.
2. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline and equidistant from each end. For regular size, the prongs shall be 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart. For miniature size and dress miniatures, the prongs shall be 1 inch ± 1/64 inch (2.54 cm ± 0.04 cm) apart.
3. A forcer may be used to bring up the musket only.
4. Pierced areas for the dress miniatures shall be as indicated below:
   - -17: As indicated.
   - -18: As indicated except no piercing under star.
   - -19: Between the two stars only (center area).
   - -20: Between the three stars only (center area).
5. Silver colored badges may be nickel or rhodium plated with a mirror-like polished finish for commercial sale except the silver plating requirement shall not apply.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0586)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.