NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/24H
15 November 1996
SUPERSEDING
MIL-B-3628/24G
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT INFANTRYMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

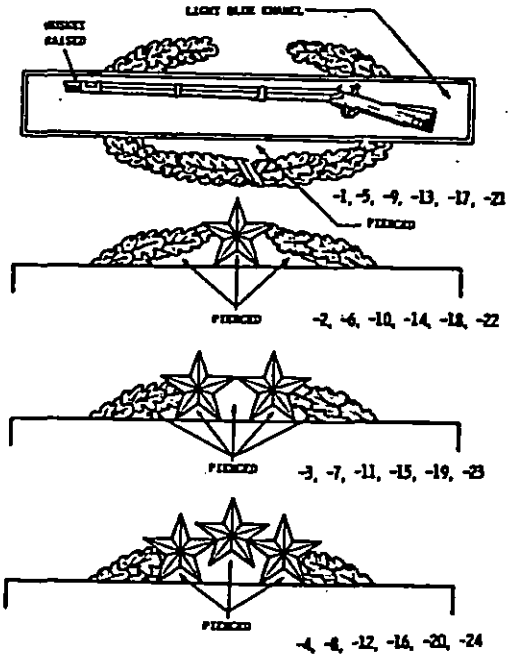

MATERIAL: Red Brass or Nickel Silver

FINISH:
-1 thru -4, -9 thru -12, -17 thru -20:
FRAME - Soft Enameled, Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
STAR(S) - Silver Plated, Mirror-like Polished (when applicable).

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

-5 thru -8, -13 thru 16:
WREATH - Shaded, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
STAR(S) (When applicable) - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
FRAME - Soft Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

-21,-22,-23,-24: Dull, Flat Black Enamel Finish.

DASH NO.
-1: 1st Award, Silver, Regular Size
-2: 2nd Award, Silver, Regular Size
-3: 3rd Award, Silver, Regular Size
-4: 4th Award, Silver, Regular Size
-5: 5th Award, Gold, Regular Size
-6: 6th Award, Gold, Regular Size
-7: 7th Award, Gold, Regular Size
-8: 8th Award, Gold, Regular Size
-9: 1st Award, Silver, Miniature Size
-10: 2nd Award, Silver, Miniature Size
-11: 3rd Award, Silver, Miniature Size
-12: 4th Award, Silver, Miniature Size
-13: 5th Award, Gold, Miniature Size
-14: 6th Award, Gold, Miniature Size
-15: 7th Award, Gold, Miniature Size
-16: 8th Award, Gold, Miniature Size
-17: 1st Award, Silver, Dress Miniature
-18: 2nd Award, Silver, Dress Miniature
-19: 3rd Award, Silver, Dress Miniature
-20: 4th Award, Silver, Dress Miniature
-21: 1st Award, Subdued, Regular Size
-22: 2nd Award, Subdued, Regular Size
-23: 3rd Award, Subdued, Regular Size
-24: 4th Award, Subdued, Regular Size

DIMENSIONS:
HEIGHT (Overall):
-1,-5,-21: 1 inch (2.54 cm) (REF)
-2,-3,-6,-7,-22,-23: 1-13/16 inch (3.06 cm) (REF)
-4,-8,-24: 1-5/16 inch (3.33 cm) (REF)
-9,-13: 13/16 inch (2.06 cm) (REF)
-10,-11,-14,-15: 61/64 inch (2.42 cm) (REF)
-12,-16: 1-1/64 inch (2.58 cm) (REF)
-17: 7/16 inch (1.11 cm) (REF)
-18,-19: 1/2 inch (1.27 cm) (REF)
-20: 9/16 inch (1.43 cm) (REF)

WIDTH: (Overall):
-1 thru -8, -21 thru -24: 3 inches (7.62 cm) (REF)
-9 thru -16: 1-3/4 inch (4.45 cm) (REF)
-17 thru -20: 1-1/4 inch (3.18 cm) (REF)

THICKNESS (At Edge): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:55Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Enameled areas shall be light blue soft enamel and shall conform to TIOH Color Chip No. 30 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of soft enamel at the option of the manufacturer. Epoxy resin shall be smooth and flush with the bottom of the rifle. The epoxy need not be stoned.

5. The dull, flat black enamel for Dash No. -21 through -24 shall match FED-STD-595, Chip Number 37038.

6. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line and equidistant from each end. For regular size, the prongs shall be 2 inches ± 1/64 inch (5.08 cm ± 0.04 cm) apart. For miniature size and dress miniatures, the prongs shall be 1 inch ± 1/64 inch (2.54 cm ± 0.04 cm) apart.

7. A forcer may be used to bring up the musket only.

8. Pierced areas for the dress miniatures shall be as indicated below:

-17: As indicated.
-18: As indicated except no piercing under star.
-19: Between the two stars only (center area).
-20: Between the three stars only (center area).

9. Silver colored badges may be nickel or rhodium plated with a mirror-like polished finish for commercial sale and shall match TIOH Metal Finish Chip Number 16. The silver plating requirement shall not apply for nickel or rhodium plated insignia.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.