NOT MEASUREMENT SENSITIVE


MIL-B-3628/25H
14 September 1990
SUPERSEDING
MIL-B-3628/25G
10 February 1988

MILITARY SPECIFICATION SHEET


BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

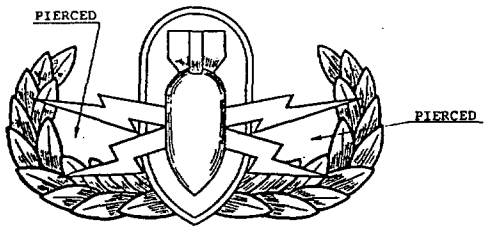

BASIC/SPECIALIST

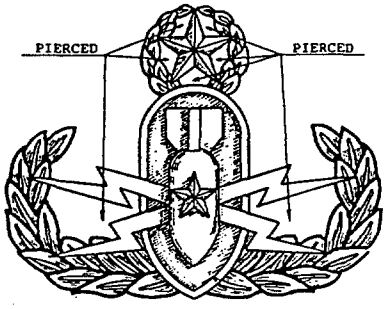

MASTER

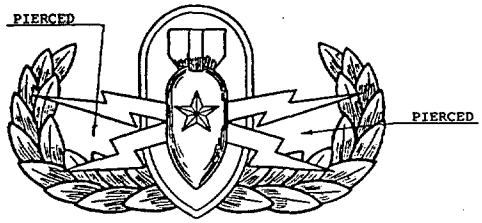

SENIOR/SUPERVISOR

DASH NO:
- -1: Senior (A,N,MC), Supervisor (AF); Regular size
- -2: Basic (A,N,MC), Specialist (AF); Regular size
- -3: Senior (A) Dress Miniature, Supervisor (AF); Miniature
- -4: Basic (A,N) Dress Miniature, Specialist (AF) Miniature
- -5: Senior (A) Subdued, Regular size
- -6: Basic (A) Subdued, Regular size
- -7: Master (A,AF,N,MC), Regular size
- -8: Master (A) Dress Miniature (AF); Miniature
- -9: Master (A) Subdued, Regular size

MATERIAL: Red brass or nickel silver

DIMENSIONS:

HEIGHT (Overall):
- -1,-2,-5,-6: 1 inch (2.54 cm) (REF)
- -3.-4: 1/2 inch (1.27 cm) (REF)
- -7,-9: 1-3/8 inch (3.49 cm) (REF)

WIDTH (Overall):
- -1,-2,-5,-6,-7,-9: 1-3/4 inch (4.45 cm) (REF)
- -3,-4,-8: 7/8 inch (2.22 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

THICKNESS (Overall):

-1,-5,-7,-9 (Bomb star):	.140 inch ± .010 inch	(0.355 cm ± 0.025 cm)
-2,-6 (Bomb center):	.095 inch ± .005 inch	(0.241 cm ± 0.012 cm)
-3,-8 (Bomb star):	.095 inch ± .005 inch	(0.241 cm ± 0.012 cm)
-4 (Bomb center):	.060 inch ± .005 inch	(0.152 cm ± 0.012 cm)

FINISH:

-1,-2,-3,-4,-7,-8:	Nickel plated (red brass only), silver plated, oxidized, matte finish.
-5,-6,-9:	Dull flat black enamel finish.

NOTES:

1. Attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal centerline of the badge and the center of the wreath.
2. A mock forcer may be used to bring up the details of the star.
3. Dash numbers 1, 2, 3, 4, 7 and 8 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale for Air Force use.
4. Piercing shall be as shown. Piercing around star applies to regular size badges only.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force 82,99
Navy - MC
DLA - CT

(Project No. 8455-0536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.