NOT MEASUREMENT SENSITIVE


MIL-B-3628/25L
30 July 1993
SUPERSEDING
MIL-B-3628/25K
13 September 1991

MILITARY SPECIFICATION SHEET


BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

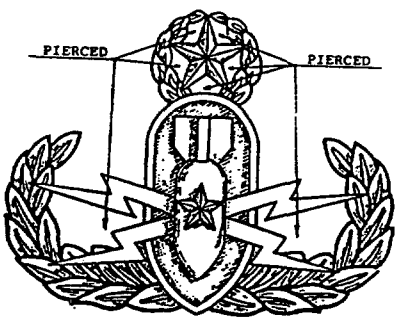

MASTER

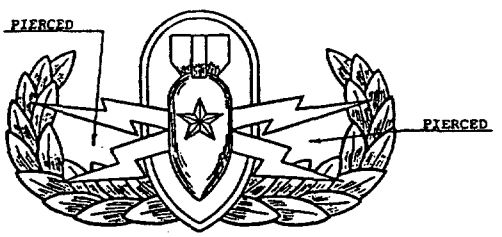

SENIOR/SUPERVISOR

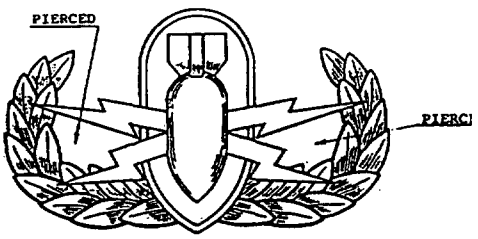

BASIC/SPECIALIST

DASH NO:
- -1: Regular Size, Senior (A, N, MC), Supervisor (AF)
- -2: Regular Size, Basic (A, N, MC), Specialist (AF)
- -3: Dress Miniature Size, Senior (A), Supervisor (AF)
- -4: Dress Miniature Size, Basic (A, N), Specialist
- -5: Regular Size, Senior (A), Subdued
- -6: Regular Size, Basic (A), Subdued
- -7: Regular Size, Master (A, AF, N, MC),
- -8: Dress Miniature Size, Master (A)
- -9: Regular Size, Master (A), Subdued

MATERIAL: Red Brass or Nickel Silver

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

FINISH:

-1, -2, -3, -4, -7, -8:

AIR FORCE: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

ARMY, NAVY, MARINE CORPS: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

-5, -6, -9: Dull, Flat Black Enamel Finish.

DIMENSIONS:

HEIGHT (Overall):

-1, -2, -5, -6: 1 inch (2.54 cm) (REF)

-3, -4: 1/2 inch (1.27 cm) (REF)

-7, -9: 1-7/16 inches (3.65 cm) (REF)

-8: 3/4 inch (1.91 cm) (REF)

WIDTH (Overall):

-1, -2, -5, -6, -7, -9: 1-3/4 inches (4.45 cm) (REF)

-3, -4, -8: 7/8 inch (2.22 cm) (REF)

THICKNESS (Overall):

-1, -5, -7, -9 (Bomb Star): 0.140 inch ± 0.010 inch (0.355 cm ± 0.025 cm)

-2, -6 (Bomb Center): 0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)

-3, -8 (Bomb Center): 0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)

-4 (Bomb Center): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the details of the star.

3. The attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal center line of the badge and the center of the wreath.

4. Piercing shall be as indicated. Piercing around star applies to regular size badges only.

5. The dull, flat, black enamel for Dash No. -5, -6, and -9 shall match FED-STD-595, Chip No. 37038.

6. As an alternate method of manufacturing for commercial sale only, Army Dash No. -1, -2, -3, -4, -7, and -8 may be nickel plated with a mirror-like polish finish and shall match TIOH Metal Finish Chip Number 16.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 82, 99
Navy - MC
DLA - CT

User activities:
Air Force - 45

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.