NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/25M
15 November 1996
SUPERSEDING
MIL-B-3628/25L
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

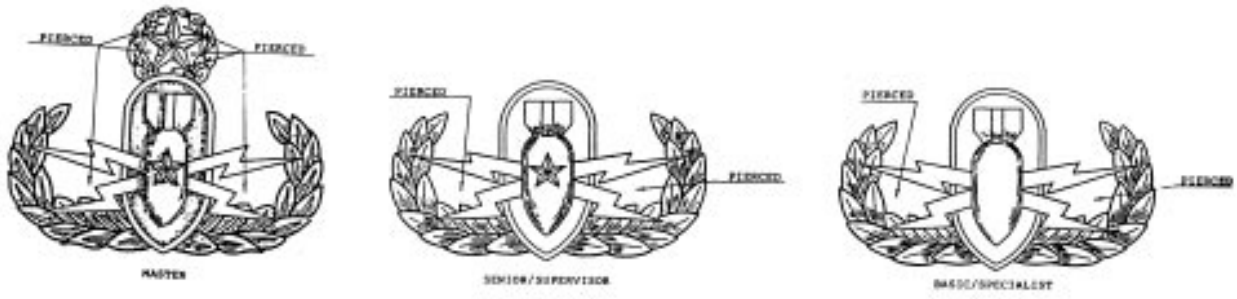

DASH NO:
-1: Regular Size, Senior (A, N, MC), Supervisor (AF)
-2: Regular Size, Basic (A, N, MC), Specialist (AF)
-3: Dress Miniature Size, Senior (A), Supervisor (AF)
-4: Dress Miniature Size, Basic (A, N), Specialist
-5: Regular Size, Senior (A), Subdued
-6: Regular Size, Basic (A), Subdued
-7: Regular Size, Master (A, AF, N, MC),
-8: Dress Miniature Size, Master (A)
-9: Regular Size, Master (A), Subdued

MATERIAL: Red Brass or Nickel Silver
FINISH:
-1, -2, -3, -4, -7, -8:
AIR FORCE: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
ARMY, NAVY, MARINE CORPS: Nickel Plated (Red Brass Only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-5, -6, -9: Dull, Flat Black Enamel Finish.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):		
	-1, -2, -5, -6:	1 inch (2.54 cm) (REF)
	-3, -4:	1/2 inch (1.27 cm) (REF)
	-7, -9:	1-7/16 inches (3.65 cm) (REF)
	-8:	3/4 inch (1.91 cm) (REF)
WIDTH (Overall):		
-1, -2, -5, -6, -7, -9:		1-3/4 inches (4.45 cm) (REF)
-3, -4, -8:		7/8 inch (2.22 cm) (REF)
THICKNESS (Overall):		
-1, -5, -7, -9 (Bomb Star):		0.140 inch ± 0.010 inch (0.355 cm ± 0.025 cm)
-2, -6 (Bomb Center):		0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)
-3, -8 (Bomb Center):		0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)
-4 (Bomb Center):		0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the details of the star.

3. The attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal center line of the badge and the center of the wreath.

4. Piercing shall be as indicated. Piercing around star applies to regular size badges only.

5. The dull, flat, black enamel for Dash No. -5, -6, and -9 shall match FED-STD-595, Chip No. 37038.

6. As an alternate method of manufacturing for commercial sale only, Army Dash No. -1, -2, -3, -4, -7, and -8 may be nickel plated with a mirror-like polish finish and shall match TIOH Metal Finish Chip Number 16.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.