
MILITARY SPECIFICATION SHEET

Badge, Qualification, Diver

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

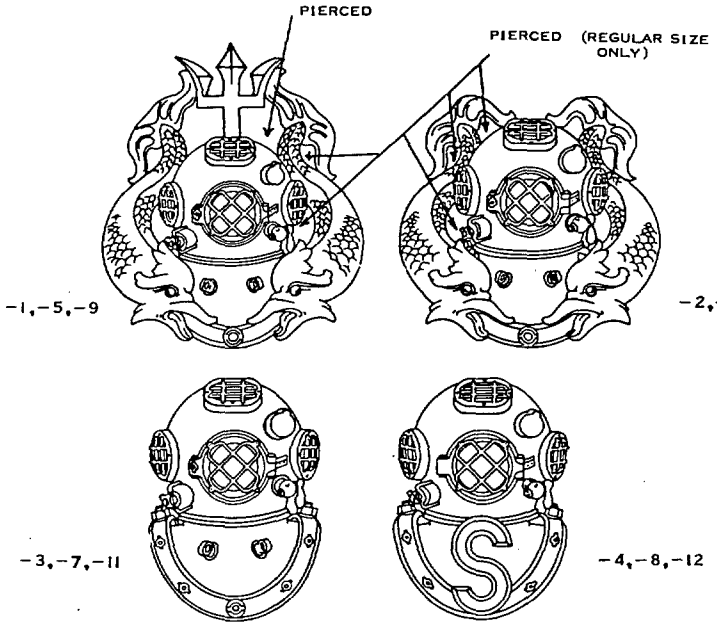

DASH NO.

-1: Master Diver, Regular Size, A
-2: Diver 1st Class, Regular Size, A,N,CG
-3: Diver 2nd Class, Regular Size, A,N,CG
-4: Diver, Salvage, Regular Size, A
-5: Master Diver, Dress Miniature, A
-6: Diver 1st Class, Dress Miniature, A
-7: Diver 2nd Class, Dress Miniature, A
-8: Diver, Salvage, Dress Miniature, A
-9: Master Diver, Regular Size, Subdued, A
-10: Diver 1st Class, Regular Size, Subdued, A
-11: Diver 2nd Class, Regular Size, Subdued, A
-12: Diver, Salvage, Regular Size, Subdued, A

MATERIAL:
-1 THRU -8: 1/20 SILVER FILLED (FRONT ONLY) OVER A COMMERCIAL COPPER BASE ALLOY)
-9 THRU -12: RED BRASS OR ALUMINUM

DIMENSIONS (INCHES):
HEIGHT(OVERALL):
-1,-9: 1-1/4 (REF)
-3,-4,-11,-12: 1 (REF)
-2,-10: 1-1/16 (REF)
-5: 13/16 (REF)
-6: 21/32 (REF)
-7,-8: 5/8 (REF)
WIDTH(OVERALL):
-1,-2,-9,-10: 1-3/32 (REF)
-3,-4,-11,-12: 23/32 (REF)
-5,-6: 11/16 (REF)
-7,-8: 7/16 (REF)
THICKNESS (AT FACE WINDOW):
-1 THRU -4, -9 THRU -12: .135 ± .010
-5 THRU -8: .095 ± .005

FINISH:
-1 THRU -8: SILVER PLATED, OXIDIZED, HIGHLIGHTS SATIN FINISHED, REVERSE AND EDGES CLEAN
-9 THRU -12: DULL FLAT BLACK ENAMEL FINISH OR ANODIZED AND DYED AS APPLICABLE

NOTES:
1. DASH NOS. 1 THRU 8 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENT FOR SILVER PLATING SHALL NOT APPLY.

WEIGHT (MINIMUM):

-1:	185 GRAINS	-5:	53 GRAINS
-2:	165 GRAINS	-6:	50 GRAINS
-3:	118 GRAINS	-7:	35 GRAINS
-4:	115 GRAINS	-8:	33 GRAINS

2. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FROM EACH END AND ON CENTERS AS LISTED BELOW:

-1,-2,-9,-10: 7/8 ± 1/64 INCH
-3,-4,-11,-12: 3/4 ± 1/64 INCH
-5,-6,-7,-8: 1/2 ± 1/64 INCH

3. DASH NOS. 1 THRU 8 MAY BE MADE FROM ALUMINUM FOR COMMERCIAL SALE ALSO. THE BADGES SHALL BE ANODIZED AND FINISHED TO MATCH THE STANDARD SAMPLES.

	CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:
ARMY	IH		SM
NAVY	PE	PE,SA	CG
OTHER		DP	

PREPARING ACTIVITY:
THE INSTITUTE OF HERALDRY, UNITED STATES ARMY

Project No. 8455-A077

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.