
MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, DIVER

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

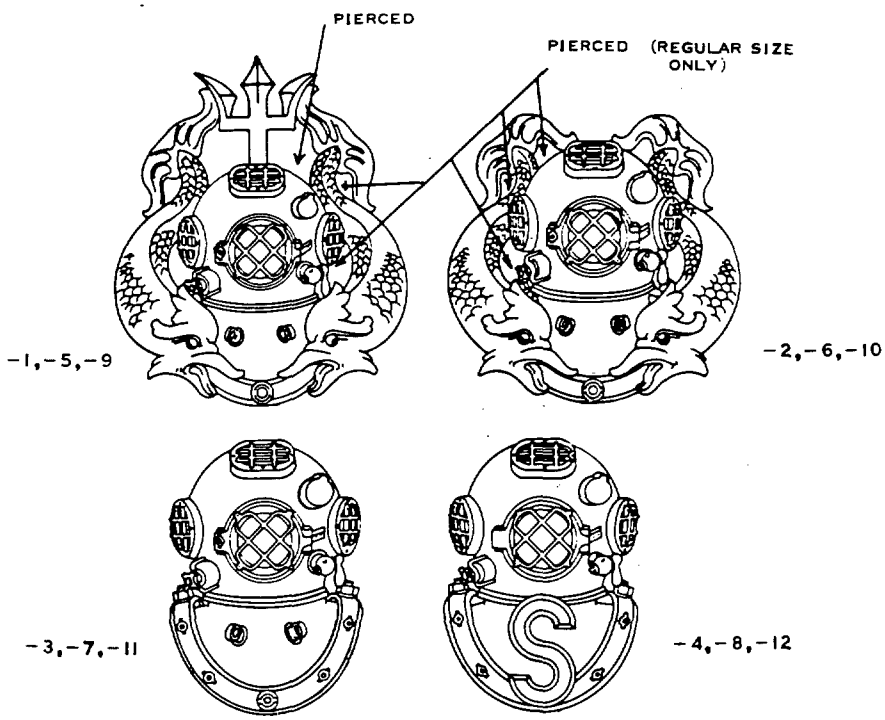

DASH NOS:

-1: MASTER DIVER, REGULAR SIZE, A
-2: DIVER 1ST CLASS, REGULAR SIZE, A,N,CG
-3: DIVER 2ND CLASS, REGULAR SIZE, A,N,CG
-4: DIVER, SALVAGE, REGULAR SIZE, A
-5: MASTER DIVER, DRESS MINIATURE, A
-6: DIVER 1ST CLASS, DRESS MINIATURE, A
-7: DIVER 2ND CLASS, DRESS MINIATURE, A
-8: DIVER, SALVAGE, DRESS MINIATURE, A
-9: MASTER DIVER, REGULAR SIZE, SUBDUED, A
-10: DIVER 1ST CLASS, REGULAR SIZE, SUBDUED, A
-11: DIVER 2ND CLASS, REGULAR SIZE, SUBDUED, A
-12: DIVER, SALVAGE, REGULAR SIZE, SUBDUED, A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1 THRU -8: RED BRASS OR NICKEL SILVER
-9 THRU -12: RED BRASS

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
-1,-9: 1-1/4 (REF)
-3,-4,-11,-12: 1 (REF)
-2,-10: 1-1/16 (REF)
-5: 13/16 (REF)
-6: 21/32 (REF)
-7,-8: 5/8 (REF)

WIDTH (OVERALL):
-1,-2,-9,-10: 1-3/32 (REF)
-3,-4,-11,-12: 23/32 (REF)
-5,-6: 11/16 (REF)
-7,-8: 7/16 (REF)

THICKNESS:
AT FACE WINDOW:
-1 THRU -4, -9 THRU -12: .135 ± .010
-5 THRU -8: .095 ± .005
AT EDGE:
-1,-2,-3: .075 ± .005
-4,-5,-6: .063 ± .005

FINISH:
-1 THRU -8: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, HIGHLIGHTS SATIN FINISH, REVERSE AND EDGES CLEAN
-9 THRU -12: DULL, FLAT BLACK ENAMEL FINISH

NOTES:

1. DASH NOS. 1 THRU 8 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENT FOR SILVER PLATING SHALL NOT APPLY.

WEIGHT (MINIMUM):

-1:	185 GRAINS	-5:	53 GRAINS
-2:	165 GRAINS	-6:	50 GRAINS
-3:	118 GRAINS	-7:	35 GRAINS
-4:	115 GRAINS	-8:	33 GRAINS

2. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH. THE PRONGS FOR -1, -2, -5, -6, -9 AND -10 SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE. THE PRONGS FOR -3, -4, -7, -8, -11 AND -12 SHALL BE LOCATED ON THE VERTICAL CENTERLINE.

-1,-2,-9,-10: 7/8 ± 1/64 INCH
-3,-4,-11,-12: 3/4 ± 1/64 INCH
-5,-6,-7,-8: 1/2 ± 1/64 INCH

Custodian:
Army - IH
Navy - NU

Review activities:
DLA - CT

User activities:
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455-0268)

★ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033/90857

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.