NOT MEASUREMENT SENSITIVE


MIL-B-3628/26G
26 April 1991
SUPERSEDING
MIL-B-3628/26F
10 February 1988

MILITARY SPECIFICATION SHEET

Badge, Qualification, Diver

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

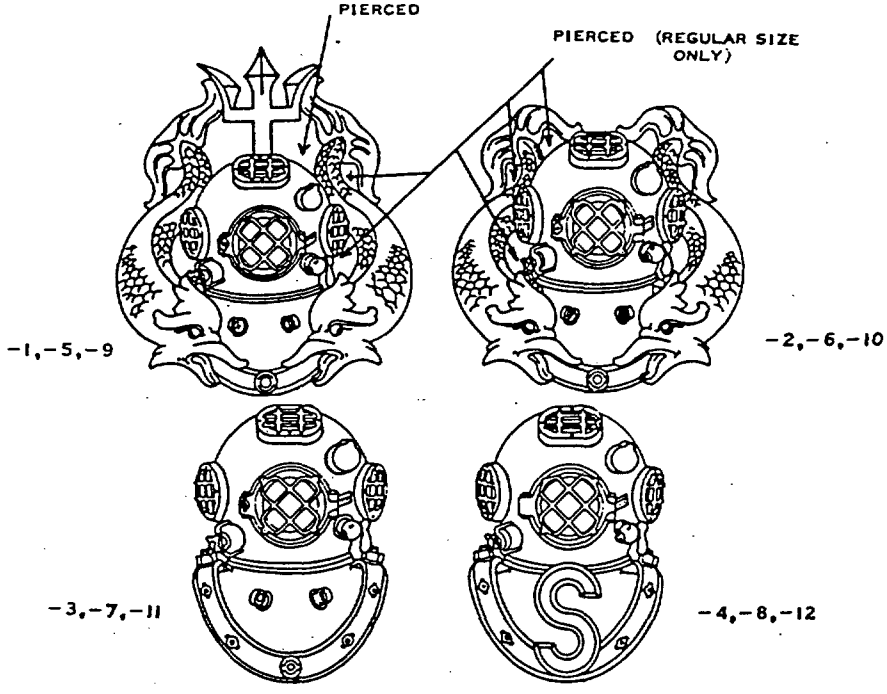

DASH NO:

-1: Master Diver, Regular size, A
-2: Diver 1st Class, Regular size, A,N,CG
-3: Diver 2nd Class, Regular size, A,N,CG
-4: Diver, Salvage, Regular size, A
-5: Master Diver, Dress Miniature, A
-6: Diver 1st Class, Dress Miniature, A
-7: Diver 2nd Class, Dress Miniature, A
-8: Diver, Salvage, Dress Miniature, A
-9: Master Diver, Regular size, subdued, A
-10: Diver 1st Class, Regular size, subdued, A
-11: Diver 2nd Class, Regular size, subdued, A
-12: Diver, Salvage, Regular size, subdued, A

AMSC N/A
FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

MATERIAL: -1 thru -8: Red brass or nickel silver
-9 thru -12: Red brass

DIMENSIONS:
HEIGHT (Overall):
-1,-9: 1-1/4 inches (3.18 cm) (REF)
-3,-4,-11,-12: 1 inch (2.54 cm) (REF)
-2,-10: 1-1/16 inch (2.7 cm) (REF)
-5: 13/16 inch (2.06 cm) (REF)
-6: 21/32 inch (1.67 cm) (REF)
-7,-8: 5/8 inch (1.59 cm) (REF)
WIDTH (Overall):
-1,-2,-9,-10: 1-3/32 inch (2.78 cm) (REF)
-3,-4,-11,-12: 23/32 inch (1.83 cm) (REF)
-5,-6: 11/16 inch (1.75 cm) (REF)
-7,-8: -7/16 inch (1.11 cm) (REF)
THICKNESS (At face window):
-1 thru -4, -9 thru -12: .135 inch ± .010 inch (0.342 cm ± 0.025 cm)
-5 thru -8: .095 inch ± .005 inch (0.241 cm ± 0.012 cm)
At Edge:
-1,-2,-3: .075 inch ± .005 inch (0.190 cm ± 0.012 cm)
-4,-5,-6: .063 inch ± .005 inch (0.160 cm ± 0.012 cm)

FINISH:
-1 thru -8: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish
-9 thru -12: Dull, flat black enamel finish

NOTES:
1. Dash No. 1 thru 8 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale except the silver plating requirement shall not apply.

2. The attaching device shall be prong and clutch type. The prongs for Dash No. 1, 2, 5, 6, 9 and 10 shall be located on the horizontal centerline, equidistant from each end and the distance apart as indicated below. The prongs for Dash No. 3, 4, 7, 8, 11 and 12 shall be located on the vertical centerline, equidistant from each end and the distance apart as indicated below.

Dash No.	Distance Apart
1, 2, 9, 10	7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm)
3, 4, 11, 12	3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm)
5, 6, 7, 8	1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm)

Custodians:
Army - IH
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Projected No. 8455-0586)

User Activity:
Navy - CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.