INCH-POUND


MIL-DTL-3628/26K
10 December 2012
SUPERSEDING
MIL-DTL-3628/26J
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DIVER

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

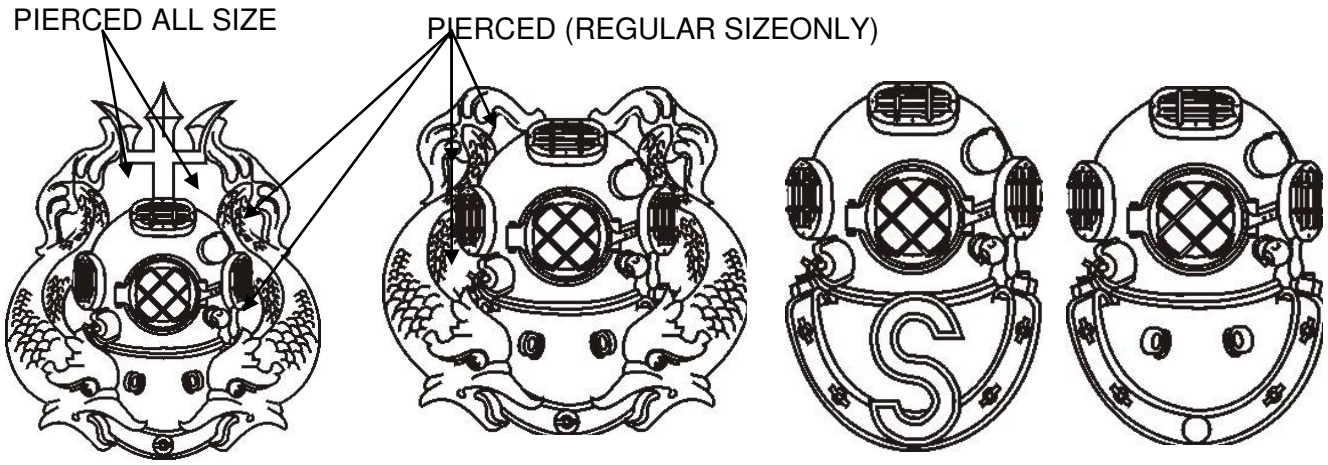

-1,- 5,-9
Master Diver

-2,-6,-10
First Class Diver

-4,-8,-12
Salvage Diver

-3,-7,-11
Second Class Diver

DASH NUMBERS:

-1 Master Diver, Regular Size (A)
-2 Diver 1st Class, Regular Size (A,N,CG)
-3 Diver 2nd Class, Regular Size (A,N,CG)
-4 Diver, Salvage, Regular Size (A)
-5 Master, Diver, Miniature Size (A)
-6 Diver 1st Class, Dress Miniature (A)
-7 Diver 2nd Class, Dress Miniature(A)
-8 Diver, Salvage, Dress Miniature (A)
-9 Master Diver, Regular Size, Subdued (A)
-10 Diver 1st Class, Regular Size, Subdued (A)
-11 Diver 2nd Class, Regular Size, Subdued (A)
-12 Diver, Salvage, Regular Size, Subdued (A)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

MATERIAL: (-1 through -8): Red Brass 85/15 (UNS Alloy No.C-230) or Nickel Silver 65/15 (UNS Alloy No. C-752)
(-9 through -12): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (-1 through -8): Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.
(-9 through -12): Dull, Flat Black TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (Overall):

-1,-9: 1-1/4 inches (REF)
-3, -4, -11, -12: 1 inch (REF)
-2,-10: 1-1/16 inches (REF)
-5: 13/16 inch (REF)
-6: 21/32 inch (REF)
-7, -8: 5/8 inch (REF)

WIDTH (Overall):

-1, -2, -9, -10: 1-3/32 inches (REF)
-3, -4, -11, -12: 23/32 inch (REF)
-5, -6: 11/16 inch (REF)
-7, -8: 7/16 inch (REF)

THICKNESS: (At face window)

-1 thru -4, -9 thru -12: 0.135 inch $\pm$ .010 inch
-5 thru -8: 0.095 inch $\pm$ .005 inch

THICKNESS: (At edge):
-1, -2, -3: 0.075 inch $\pm$ .005 inch
-4, -5, -6: 0.063 inch $\pm$ .005 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and clutch type.

2. The prongs for -1, -2, -5, -6, -9, and -10 shall be located on the horizontal center line, equidistant from each end the distance apart as indicated below.

3. The prongs for -3, -4, -7, -8, -11, and -12 shall be located on the vertical center line, equidistant from each end and the distance apart as indicated below.

DASH NO.	DISTANCE APART
-1, -2, -9, -10	7/8 inch $\pm$ 1/64 inch
-3, -4, -11, -12	3/4 inch $\pm$ 1/64 inch
-5, -6, -7, -8	1/2 inch $\pm$ 1/64 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercings shall be as indicated.

3. Army items for -1 through -8 may be nickel plated mirror-like polished finish which shall match TIOH Metal Finish Chip Number 16 for commercial sale only. For nickel plated items, silver plating requirement shall not apply.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force -11
Navy - NU

Preparing activity:
Army – IH

Review activities:
Navy - CG1
DLA – CT

(Project No. 8455-2013-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.