INCH-POUND


MIL-DTL-3628/26M
27 February 2019
SUPERSEDING
MIL-DTL-3628/26L
21 December 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DIVER

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

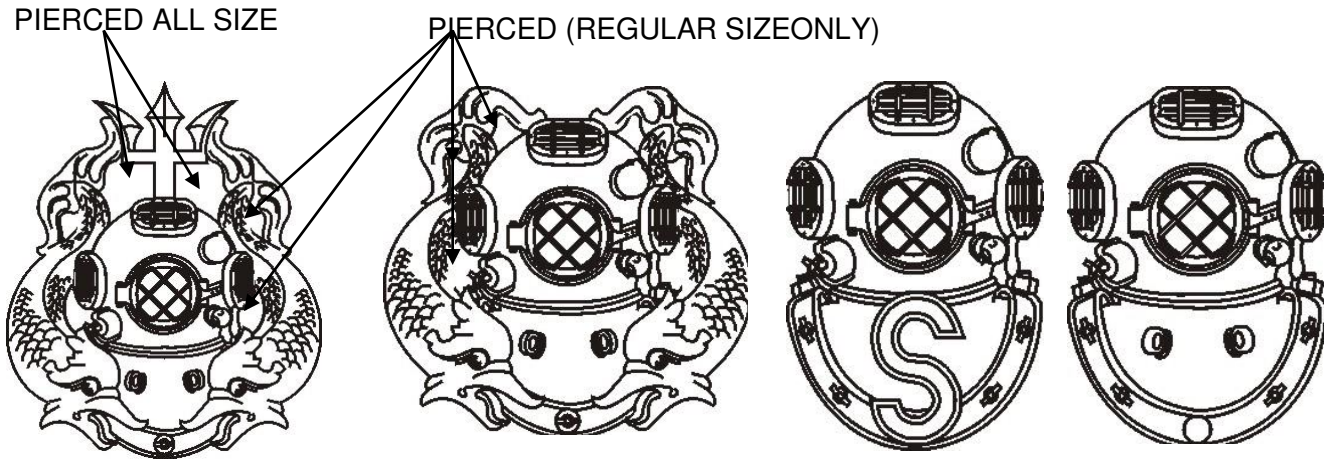

-1,- 5,-9	-2,-6,-10	-4,-8,-12	-3,-7,-11
Master Diver	First Class Diver	Salvage Diver	Second Class Diver

DASH NUMBERS:

-1 Master Diver, Regular Size (A)
-2 Diver 1st Class, Regular Size (A,N,CG)
-3 Diver 2nd Class, Regular Size (A,N,CG)
-4 Diver, Salvage, Regular Size (A)
-5 Master, Diver, Dress Miniature Size (A)
-6 Diver 1st Class, Dress Miniature (A)
-7 Diver 2nd Class, Dress Miniature(A)
-8 Diver, Salvage, Dress Miniature (A)
-9 Master Diver, Regular Size, Subdued (A)
-10 Diver 1st Class, Regular Size, Subdued (A)
-11 Diver 2nd Class, Regular Size, Subdued (A)
-12 Diver, Salvage, Regular Size, Subdued (A)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

MATERIALS:
-1 through -8: Red Brass 85/15 (UNS Alloy No.C-230) or Nickel Silver 65/15 (UNS Alloy No. C-752)

-9 through -12: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1 through -8): Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
-9 through -12: Dull, Flat Black TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (Overall):
-1,-9: 1-1/4 inches (REF)
-3, -4, -11, -12: 1 inch (REF)
-2,-10: 1-1/16 inches (REF)
-5: 13/16 inch (REF)
-6: 21/32 inch (REF)
-7, -8: 5/8 inch (REF)

WIDTH (Overall):
-1, -2, -9, -10: 1-3/32 inches (REF)
-3, -4, -11, -12: 23/32 inch (REF)
-5, -6: 11/16 inch (REF)
-7, -8: 7/16 inch (REF)

THICKNESS: (At face window)
-1 thru -4, -9 thru -12: 0.135 inch $\pm$ .010 inch
-5 thru -8: 0.095 inch $\pm$ .005 inch

THICKNESS: (At edge):
-1, -2, -3: 0.075 inch $\pm$ .005 inch
-4, -5, -6: 0.063 inch $\pm$ .005 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and wing type clutch.

2. The prongs for -1, -2, -5, -6, -9, and -10 shall be located on the horizontal center line, equidistant from each end the distance apart as indicated below.

3. The prongs for -3, -4, -7, -8, -11, and -12 shall be located on the vertical center line, equidistant from each end and the distance apart as indicated below.

DASH NO.	DISTANCE APART
-1, -2, -9, -10	7/8 inch $\pm$ 1/64 inch
-3, -4, -11, -12	3/4 inch $\pm$ 1/64 inch
-5, -6, -7, -8	1/2 inch $\pm$ 1/64 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercings shall be as indicated.

3. -1 through -8 Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force -11
Coast Guard - CG1

Preparing activity:
Army – IH

Review activity:
DLA - CT

(Project No. 8455-2019-072)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:55Z
Check the source to verify that this is the current version before use.