NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/27L
5 October 2020
SUPERSEDING
MIL-DTL-3628/27K
30 November 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION COMBAT MEDICAL BADGES, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

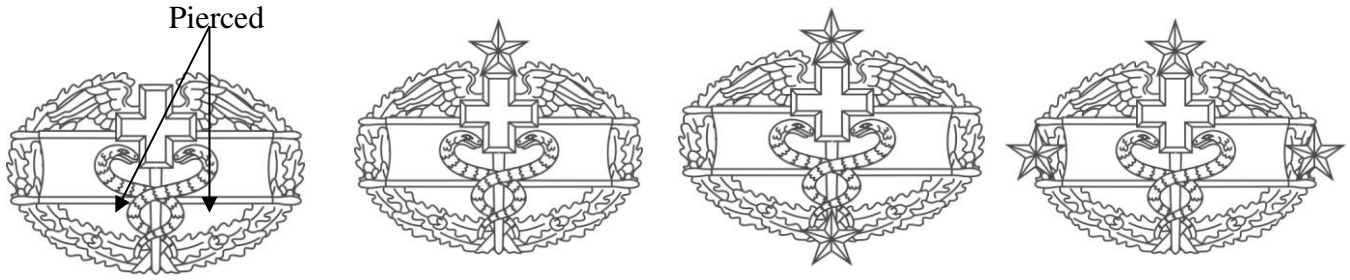

First Award
-1, -5, -9

Second Award
-2, -6, -10

Third Award
-3, -7, -11

Fourth Award
-4, -8, -12

DASH NUMBERS:

-1 Combat Medical, Basic, Regular Size

-2 Combat Medical, 2nd Award, Regular Size

-3 Combat Medical, 3rd Award, Regular Size

-4 Combat Medical, 4th Award, Regular Size

-5 Combat Medical, Basic, Dress Miniature Size

-6 Combat Medical, 2nd Award, Dress Miniature Size

-7 Combat Medical, 3rd Award, Dress Miniature Size

-8 Combat Medical, 4th Award, Dress Miniature Size

-9 Combat Medical, Basic, Regular Size, Subdued

-10 Combat Medical, 2nd Award, Regular Size, Subdued

-11 Combat Medical, 3rd Award, Regular Size, Subdued

-12 Combat Medical, 4th Award, Regular Size, Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No.C-752):

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.

FINISH:
1: (-1 through -8): Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

2: (-9 through -12): Dull, Flat Black and shall match TIOH Metal Finish Chip Number 21

DIMENSIONS:
HEIGHT (Overall):

-1, -9: 1 inch (REF)	-5: 19/32 inch (REF)
-2, -4, -10, -12: 1-7/32 inches (REF)	-6, -8: 13/16 inch (REF)
-3, -11:1-13/32 inches (REF)	-7: 25/32 inch (REF)

WIDTH (Overall):

-1, -2, -3, -9, -10, -11: 1-1/2 inches (REF)	-5, -6, -7: 7/8 inch (REF)
-4, -12:1-13/16 inch (REF)	-8: 1 inch (REF)

THICKNESS: (At center cross)
-1 thru -4, -9 thru -12: 0.095 inch $\pm$ .010 inch
-5 thru -8: 0.065 inch $\pm$ .010 inch

PIERCING AND ATTACHING DEVICE:
1. Piercing shall be as indicated and are required on all badges.

2. The attaching device shall be prong and wing type clutch.

3. The prongs shall be located on the horizontal center line equidistant from each end and 1 inch $\pm$ 1/32 inch apart for regular size badges and 3/4 inch $\pm$ 1/32 inch apart for dress miniature size badges.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. -1 through -8: Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-586)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:56Z
Check the source to verify that this is the current version before use.