MIL-I-6301A
AMENDMENT 2
10 JULY 1981
SUPERSEDING
AMENDMENT 1
18 July 52

MILITARY SPECIFICATION

INDICATOR, PRESSURE, FUEL, 0-600 PSI

This amendment forms a part of Military Specification, MIL-I-6301A, dated 29 February 1952 and is approved for use by all departments and agencies of The Department Of Defense.

PAGE 1

2.1.1: Under "SPECIFICATIONS" add "Federal" and the following thereunder:

"PPP-B-636 Box, Shipping, Fiberboard"

Under "SPECIFICATIONS, Military" add the following:

"MIL-P-116 Preservation-packaging, Methods Of"

2.1.2: Under "Military Standards" add the following:

"MIL-STD-794 Parts And Equipment, Procedures For Packaging And Packing Of

MS 33585 Pointer, Dial, Standard Design Of Aircraft Instrument"

Delete "Air Force - Navy Aeronautical Standard Drawing" and listing thereunder.

Add the following boxed paragraph to center bottom of page:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODS, Federal Center, Battle Creek MI 49016 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

PAGE 2

3.3.2: Delete "AND 10404-8" and substitute "MS 33585-8".

3.3.3.1.1: Delete the entire paragraph and substitute the following:

FSC 6620

Source: https://assist.dla.mil -- Downloaded: 202610-17T06:50Z
Check the source to verify that this is the current version before use.

"3.3.3.1.1 Fluorescent-luminescent markings. The markings shall be finished in fluorescent-luminescent material. The dimensions of the markings shall be as follows:

	Height or Length Inch ±1/64	Width of Line or Graduation Inch ±0.005
Numerals 0, 50, 100, 200, 300, 400, 500, and 600	1/8	0.025
Graduation at 0, 50, and each 100	3/16	0.031
Each 10-pound graduation 10 to 90	3/16	0.015
Five-pound graduations and graduations 150, 250, 350, 450, and 550	3/32	0.015
Lettering "FUEL PRESS"	3/32	0.025
Lettering "PSI"	3/32	0.025"

Add new paragraph 3.5 as follows:

"3.5 Reclaimed materials. The use of reclaimed materials shall be encouraged to the maximum extent possible without jeopardizing the intended end use of the item."

PAGE 3

Delete Figure 1 and substitute the figure 1 in this amendment.

PAGE 4

Add new paragraph 4.3 as follows:

"4.3 Inspection and test. Tests of methods of preservations and packaging shall be accomplished in accordance with Section 4 of MIL-P-116 to insure compliance with Section 5 of this specification."

Delete paragraphs 5.- 5.2 and substitute the following:


"5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (See 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Indicators shall be cleaned in accordance

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:50Z
Check the source to verify that this is the current version before use.

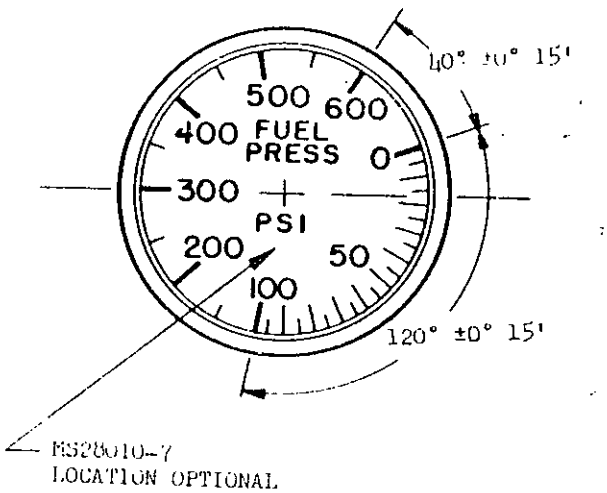

DIMENSIONS IN INCHES.

FIGURE 1. Dial

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:50Z
Check the source to verify that this is the current version before use.

with process C-1 of MIL-P-116.

5.1.1.2 Drying. Indicators shall be dried in accordance with process D-4 of MIL-P-116.

5.1.1.3 Preservation application. Not applicable.

5.1.1.4 Unit packaging. Unless otherwise specified by the procuring activity, each pressure indicator shall be preserved and packaged in quantity unit packs of one each in accordance with method IC-1 of MIL-P-116. Overbox in PPP-B-636 carton, large enough to allow for application of sufficient cushioning material between container and bag, of a type, density and thickness to insure shock transmission does not exceed peak values in G's established for the indicator, when completed packs are subjected to the rough handling drop test of MIL-P-116.

5.1.2 Level C. Indicators shall be clean, dry and individually packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to first receiving activity.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Indicators packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-636, weather-resistant class, unless otherwise specified by the procuring activity. Insofar as practical, exterior shipping container shall be of uniform shape, size, and of minimum tare and cube, consistent with the protection required. Table II of MIL-STD-794 applies for Army use.

5.2.2 Level B. Indicator packaged as specified in 5.1.1 shall be packed in domestic class exterior shipping containers conforming to PPP-B-636. Other requirements as specified in 5.2.1 above are applicable.

5.2.3 Level C. Packaging shall be applied which affords adequate protection during domestic shipment from the supply source to the first receiving activity for immediate use. This level shall conform to applicable carrier rules and regulations and may be the contractor's commercial practice provided the latter meets the requirements of this level."

Renumber existing paragraph 5.2 to reflect "5.3 Package marking."

Source: https://assist.dla.mil -- Downloaded: 202610-17T06:50Z
Check the source to verify that this is the current version before use.

6.2: Add the following sentence at end of paragraph:

"Specify levels of packaging and packing required (see Section 5)."

Custodian:
Air Force - 99
Navy - AS

Preparing Activity:
Air Force - 99

Project Number:
6620-0351

☆ U.S. GOVERNMENT PRINTING OFFICE: 1991 - 703-251-5177 [illegible]

Source: https://assist.dla.mil -- Downloaded: 2025-10-17T[illegible]:50Z
Check the source to verify that this is the current version before use.