A-A-2562
March 25, 1988

COMMERCIAL ITEM DESCRIPTION

BAR, CHISEL

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-B-101, Type I, Sizes 2 and 4.

This commercial item description covers chisel bars.

SALIENT CHARACTERISTICS

Material. The material used in the manufacture of the bars shall be either tool steel or an alloy steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the specified tests. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability. Special quality, fine grain, hot rolled or cold finished carbon steel may also be used.

Design. The bars, otherwise meeting the requirements of this specification, may be the manufacturer's standard design.

Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The body of the bar and the striking end of the Type I chisel bar shall be either lacquered, enameled, painted, or have an oil-coated natural finish. The work ends of Type I bars shall have a natural finish, and shall be oil-coated, lacquered, or painted.

Type I, chisel bars. Chisel bars shall have a double-beveled cutting edge, ground on both sides to an angle of 60 degrees ± 5 degrees. The minimum width of the cutting edge shall be equal to the distance across the flat surfaces of the bar. The striking end of the bar shall be uniformly chamfered. The chisel shall withstand the physical test specified below and be uniformly chamfered. The body shape shall be octagonal or hexagonal in cross section.

Hardness. The work end of the bar shall show a Rockwell C hardness of not less than 48 nor more than 56, or a hardness reading of not less than 455 nor more than 577 on the Brinell scale. The struck end of the bar shall show a Rockwell C hardness of not more than 45, or the Brinell equivalent of 421.

Type I bars shall conform to table I and be similar to figure 1.

Table I. Type I chisel bar.

National Stock Number	Size number	Dimensions between opposite flats ± 1/32 Inch	Overall length ± 1/2 Inches
5110-00-240-6034	2	3/4	24
5110-00-240-6031	4	1	36

FSC 5110

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

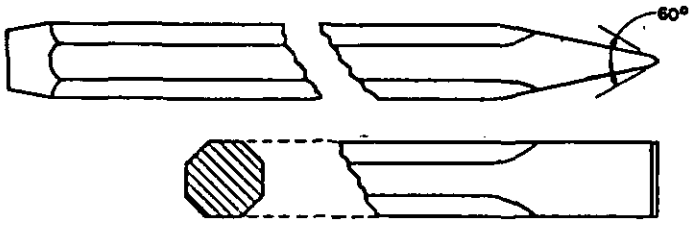


FIGURE 1. Type I, chisel bar.

Identification marking. Each chisel bar shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number, and country of origin.

Workmanship. All bars shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise specified herein. The lot size shall consist of all bars offered for acceptance at one time. The sample unit is one chisel bar.

Visual inspection. Each bar from the sample lot shall be examined for workmanship and marking requirements. The inspection level shall be I with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Dimensional inspection. Each bar from the sample lot shall be examined for dimensional requirements. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Testing of end item. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 percent defective.

Hardness test. Hardness test shall be in accordance with ASTM E18 or ASTM E10. The impressions shall be taken 1/2 inch from the end tested.

Physical test. The sample chisel bars shall be held securely in a vertical position by a vise or clamp, with the striking end of the chisel bar resting on a solid foundation. A round steel bar, at least 3/4 inch in diameter and having a hardness value of 20 to 28 on the Rockwell C scale, or a hardness reading of not less than 226 nor more than 271 on the Brinell scale, shall be held at right angles with the cutting edge of the chisel bar and struck a sufficient number of blows with a hammer to make a cut in the round steel bar at least 1/8 inch deep. Three such cuts shall be made without the cutting edge of the chisel bar chipping or showing undue wear.

Liquid penetrant test. Type I chisels shall be subjected to liquid penetrant test in accordance with ASTM E165 or magnetic particle examination per ASTM E709. Any evidence of discontinuity shall be cause for rejection.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:24Z
Check the source to verify that this is the current version before use.

Notes.

The issue of referenced documents in effect on date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements.

ASTM standards are available from American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Military standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Air Force - 99

Review Activities
Air Force - 84

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.