COMMERCIAL ITEM DESCRIPTION

BAR, PRY (ROLLING - HEAD)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-B-101, Type IV.

This commercial item description covers rolling-head pry bars.

SALIENT CHARACTERISTICS

Material. The material used in the manufacture of the bars shall be either tool steel or an alloy steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the specified tests. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability. Special quality, fine grain, hot rolled or cold finished carbon steel may also be used.

Design. The bars, otherwise meeting the requirements of this specification, may be the manufacturer's standard design.

Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The work ends of Type IV bars shall have a natural finish, and shall be oil-coated, lacquered, or painted.

Type IV, pry (rolling-head). Pry bars shall have the work end terminate in a round rolling head. The back side of the rolling head shall be rounded. That portion of the head opposite the rounded side shall form a hook. The tapered end of the bar shall be round, smoothly finished, uniformly tapered, and shall be provided with a pointed end.

Hardness. The work end of the bar shall show a Rockwell C hardness of not less than 38 nor more than 48, or a hardness reading of not less than 353 nor more than 455 on the Brinell scale.

Type IV bars shall conform to table I and be similar to figure 1.

Table I. Type IV, pry (rolling-head).

Size Number	Dimension between opposite flats	Dimensions								Test load minimum
		A	B	C	D	E	F	G	L	
	Min Max	Min Max	Min	Min	Min Max	Min	Min Max	Min Max	Min Max	
	Inch	Inch	Inch	Inches	Inch	Inches	Inch	Inch	Inches	Pounds
1	1/2 9/16	1/2 9/16	9/16	1-3/8	1/2 9/16	4-3/4	3/16 1/4	7/32 9/32	15 16	75

Size Number	National Stock Number
1	5120-00-224-1389

FSC 5120

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:24Z
Check the source to verify that this is the current version before use.

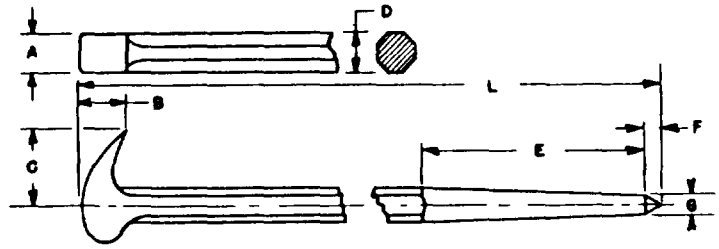


FIGURE 1. Type IV, pry (rolling-head).

Identification marking. Each pry bar shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number, and country of origin.

Workmanship. All bars shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise specified herein. The lot size shall consist of all bars offered for acceptance at one time. The sample unit is one pry bar.

Visual inspection. Each bar from the sample lot shall be examined for workmanship and marking requirements. The inspection level shall be I with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Dimensional inspection. Each bar from the sample lot shall be examined for dimensional requirements. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Testing of end item. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 percent defective.

Hardness test. Hardness test shall be in accordance with ASTM E18 or ASTM E10. The impressions shall be taken 1/2 inch from the end tested. The manufacturer shall certify that both the cutting edge end and the taper end have been similarly hardened.

Physical test. The rolling head of the Type IV bars shall be rigidly secured by a vise or clamp in a manner to apply a load to straighten the angular hook. The test load specified in table I shall be applied to the body 4-3/4 inches from the tapered end in a direction perpendicular to the body. After applying the load, the pry bar shall not take permanent set and shall not fracture when so tested. The tapered end shall also be subjected to the same test except 4-3/4 inches of the tapered end shall be clamped and the load applied one inch from the rolling-head end.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T08:24Z
Check the source to verify that this is the current version before use.

Notes.

The issue of referenced documents in effect on date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements.

ASTM standards are available from American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Military standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Air Force - 99

Review Activities
Air Force - 84

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.