A-A-430E
January 8, 1988
SUPERSEDING
A-A-430D
April 1, 1983

COMMERCIAL ITEM DESCRIPTION

CLAMP, C (VERY LIGHT SERVICE)

The General Services Administration has authorized the use of this commercial item description in lieu of Type I, Class E, Style 1 and 2, Federal Specification GGG-C-406.

Scope: This description establishes requirements for a C-clamp (very light service) used for clamping and holding work in a fixed position.

Salient characteristics:

Material. Materials used in the manufacture of clamps shall be of uniform quality and free from defects and imperfections that may affect their serviceability or durability.

Style: 1 - Regular throat.
2 - Deep throat.

Frame. Steel, heat treated or malleable iron, designed to withstand minimum loads specified without evidence of damage or permanent deformation. The anvil of the frame shall have a smooth flat surface perpendicular to the center line of the class 2B, or better, right-hand threaded hole.


Swivel. Steel, ball and socket type, metal cap type or peened screw to pad, securely attached to the inner end of the screw. The swivel button shall be free to rotate and tilt on the screw when under no load but shall not rotate when under load by rotation of the screw.

Screw. The screws shall be of metal with a class 2A, or better, right-hand thread.

Handle. Nonremovable slip-bar type handle 1-1/2 or 2 inches long, minimum, inserted through the outer end of the screw.

Finish. All surfaces of the clamps shall have a smooth finish with all edges rounded or beveled and shall be thoroughly cleaned and free of all foreign matter, fins, scale, flux, or any other imperfection.

Illustration. The clamps shall be similar to the illustration shown below.

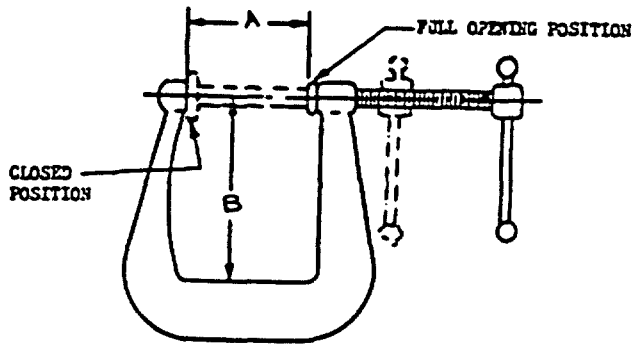

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

National Stock Number	Style	A Size of clamp	B Full opening (minimum)	Working depth (minimum)	Diameter of screw (minimum)	Weight of clamp (maximum)	Test load (minimum)
			Inches	Inches	Inch	Ounces	Pounds
5120-00-222-1620	1	1	1	7/8	1/4	4	500
5120-00-180-0904	1	1-1/4	1-1/4	1-1/8	1/4	5	800
5120-01-015-2237	1	2	2	1-1/8	5/16	9	875
5120-00-203-6439	1	2-1/2	2-1/2	2-1/2	3/8	16	900
5120-00-061-1273	2	1	1	1-3/8	1/4	5	500
5120-00-596-4053	2	2	1	3-1/2	1/4	6	200

Identification marking. Each clamp shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol, part number and country of origin.

Workmanship. The clamps shall be free of any defects that can adversely affect their operation, serviceability, or life expectancy.

QUALITY ASSURANCE PROVISIONS

Examination of the end item for defects in dimensions, finish, markings, and workmanship. Sampling shall be in accordance with MIL-STD-105 at inspection level II with an acceptable quality level (AQL) of 2.5.

Sampling for tests. Sampling for tests shall be in accordance with MIL-STD-105 at inspection level S-3 with an Acceptable Quality Level (AQL) of 4.0.

Tests:

Proof load test. Shall be conducted on a tension machine or similar device of known accuracy. Clamp shall be subjected to the applicable specified test load. The test shall be conducted with the clamp in the full open or minimum capacity opening as applicable. The test load shall be applied gradually, to simulate actual usage, until the specified minimum load is obtained. This load should be maintained for a period of not less than 5 minutes. Upon completion of this test, the clamp shall be examined and any evidence of deformed or damaged components shall be sufficient cause for classifying that clamp as a reject. The test load shall be applied to the center line of the screw.

Tensile test. The manufacturer shall furnish certification that the material of the screws conform to minimum tensile strength specified.

Hardness test. Clamp shall be tested for the hardness specified for the screws. Test impressions may be taken at any location near the extreme end of the threaded portion.

Regulatory requirement. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

Military Standards are available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:08Z
Check the source to verify that this is the current version before use.

A-A-430E

MILITARY INTERESTS:

PREPARING ACTIVITY

Military Coordinating Activity

GSA-FSS

Army - GL

Custodians:

Army - GL
Air Force - 99

Review Activities:

Air Force - 84

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.