MIL-C-5927D
21 MAY 1970
SUPERSEDING
MIL-C-5927C
5 June 1964

MILITARY SPECIFICATION

CONVEYORS, WHEEL, GRAVITY, EXTRACTION KIT

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, Navy, and the Air Force.

1. SCOPE

1.1 Scope. This specification covers extraction kit gravity conveyors.

1.2 Classification. Extraction kit gravity conveyors covered by this specification shall be of the following styles, as specified (see 6.2);

Style I - 4 foot section
Style II - 8 foot section
Style III - 10 foot section

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zinc Coating, Electrodeposited, Requirements for
UU-T-81	Tags, Shipping and Stock
PPP-C-650	Crate, Wood, Open and Covered

Military

MIL-P-116	Preservation, Methods of
MIL-G-23827	Grease, Aircraft and Instrument, Gear and Actuator Screw

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

FSC 3910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*3.2 Design. The conveyor shall be designed so that interchangeable individual sections may be coupled together, end to end, or side to side, as hereinafter specified to form various combinations. Typical installations are shown on Figure 1. The design shall be reasonably simple for ease of repair. Individual wheels and axles shall be readily removable for replacement with new or serviceable parts.

*3.2.1 Interchangeability. All parts shall be manufactured to such standards as will permit replacement or adjustment without modification of parts or conveyor.

*3.2.2 Material. All parts used in fabrication of the conveyor shall be new and of the quality necessary to produce a conveyor to meet the requirements described herein.

3.2.2.1 Protective treatment. When materials are used in the construction of the conveyor that are subject to corrosion in salt air or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip or scale with age or extremes of atmospheric conditions shall be avoided.

*3.2.2.2 Standard parts. Standard parts (MS, AN or JAN) shall be used wherever they are suitable for the purpose. Commercial utility parts such as screws, bolts, nuts, cotter pins, etc., may be used, provided they possess suitable properties and are replaceable by the standard parts (MS, AN, or JAN) without alteration. In the event there is no suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

*3.3 Construction. The conveyor shall be complete so that when installed it can be used for the purpose for which it was designed . Construction shall be free from any characteristics or defects that will prevent the conveyor from passing any of the examination(s) and tests in Section 4.

*3.3.1 Castings and forgings. Castings and forgings, if used, shall be free from defects, scale and mismatching. In no event shall such processes as welding, peening, plugging, or filling with cold solders or metallic pastes be used on castings or forgings for reclaiming any parts of the conveyor.

*3.3.2 Fastening devices. All screws, pins, bolts and similar parts shall be installed with means for preventing loss of tightness. All such parts when subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

*3.3.3 Surfaces. All surfaces of all castings, forgings, molded parts, stampings, and welded parts shall be cleaned and free from sand, dirt, fins, sprues, scale, flux or other harmful or extraneous materials. External surfaces shall be smooth and all edges shall be either rounded or beveled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*3.2 Design. The conveyor shall be designed so that interchangeable individual sections may be coupled together, end to end, or side to side, as hereinafter specified to form various combinations. Typical installations are shown on Figure 1. The design shall be reasonably simple for ease of repair. Individual wheels and axles shall be readily removable for replacement with new or serviceable parts.

*3.2.1 Interchangeability. All parts shall be manufactured to such standards as will permit replacement or adjustment without modification of parts or conveyor.

*3.2.2 Material. All parts used in fabrication of the conveyor shall be new and of the quality necessary to produce a conveyor to meet the requirements described herein.

3.2.2.1 Protective treatment. When materials are used in the construction of the conveyor that are subject to corrosion in salt air or other atmospheric conditions likely to occur during service usage, they shall be protected against such corrosion in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip or scale with age or extremes of atmospheric conditions shall be avoided.

*3.2.2.2 Standard parts. Standard parts (MS, AN or JAN) shall be used wherever they are suitable for the purpose. Commercial utility parts such as screws, bolts, nuts, cotter pins, etc., may be used, provided they possess suitable properties and are replaceable by the standard parts (MS, AN, or JAN) without alteration. In the event there is no suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

*3.3 Construction. The conveyor shall be complete so that when installed it can be used for the purpose for which it was designed . Construction shall be free from any characteristics or defects that will prevent the conveyor from passing any of the examination(s) and tests in Section 4.

*3.3.1 Castings and forgings. Castings and forgings, if used, shall be free from defects, scale and mismatching. In no event shall such processes as welding, peening, plugging, or filling with cold solders or metallic pastes be used on castings or forgings for reclaiming any parts of the conveyor.

*3.3.2 Fastening devices. All screws, pins, bolts and similar parts shall be installed with means for preventing loss of tightness. All such parts when subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

*3.3.3 Surfaces. All surfaces of all castings, forgings, molded parts, stampings, and welded parts shall be cleaned and free from sand, dirt, fins, sprues, scale, flux or other harmful or extraneous materials. External surfaces shall be smooth and all edges shall be either rounded or beveled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*3.3.4 Threads. All threaded parts shall be in the inch system and shall conform to Handbook H28.

3.4 Components.

3.4.1 Conveyor section. The conveyor section shall consist of side rails, cross members, axles, wheels or rollers, end and lateral couplings, wheel spacers and longitudinal strengthening bars. The conveyor section shall be similar to the typical section shown on Figure 2. Mating parts, not to be furnished with the conveyor section but which the conveyor construction must accommodate, are indicated in phantom on Figure 2. The conveyor section shall be so constructed that the side rails will rest on the aircraft floor. All other section members, both lateral and longitudinal, shall be so located that a minimum vertical clearance of 1/2 inch shall be provided to prevent interference with skid strips or other cargo floor obstructions.

3.4.1.1 Side rails. The side rails shall be formed from aluminum alloy material of not less than 1/8 inch thickness. Each side rail of the section shall provide approximately 10 square inches per foot (of section) of bearing area to distribute loads to the floor structure of the aircraft. The width of this bearing area shall not exceed 1 inch. The ends of the side rail top flanges shall be cut back as necessary and shall be finished in such a way to prevent damage to conveyed items. Each side rail of the conveyor section shall contain drilled holes for attaching any number of sections together, side by side, by means of lateral couplings. These holes shall be located as shown on Figure 2, with sufficient accuracy to allow complete interchangeability of sections.

*3.4.1.2 Cross members. Cross members shall be provided to align and brace the side rails. The cross members shall be constructed of aluminum alloy material of not less than 1/8 inch thickness. The cross members shall be placed between the first and second axles on either end and other cross members shall be spaced approximately equidistant between on intervals not exceeding 21 inches.

*3.4.1.3 Axles. The axles shall be fabricated from medium carbon (minimum C1035) steel, shall be of not less than 5/16 inch diameter, and shall be spaced on 3 inch centers along the side rails. Each end axle of the conveyor section shall contain either a single, steel tube-type roller or a series of individual wheels. If individual wheels are employed, a sufficient number shall be used to obtain a total rim width of not less than 4 inches. The intermediate axles shall be suitable for attaching an end buffer assembly conforming to Air Force Drawing 49C6646 to three adjacent axles. Intermediate axles shall also be suitable for attachment of hold down clamps confoming to Air Force Drawing 48A7141, for securing the conveyor section to cargo floor fittings conforming to AN7516.

*3.4.1.4 Wheels. The wheels shall be steel. Not less than twelve individual wheels for each square foot of section area shall be provided and shall be so spaced on axles as to most advantageously support and distribute working loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

The wheels shall have a diameter of approximately 2 inches, a circumferential width of not less than 1/2 inch and integral, single or dual row, full complement ball bearings. The radial and axle play shall be sufficiently large to preclude the possibility of binding or locking. The top surface of the wheels shall extend at least 1/4 inch above all other parts of the conveyor section and shall have bores to match the axles specified in 3.4.1.3.

3.4.1.4.1 Bearings. The wheel bearings shall be fully packed with grease ~~conforming to MIL-C-23827 and adequately shielded to restrict the entrance of~~ foreign matter and retain the supply of lubricant. The side shields shall extend radially inward to the point where they overlap the inner race shoulder grooves.

3.4.1.5 End couplings. Positive locking couplings shall be provided as an integral part of the frame, for quickly attaching any number of sections end to end to form one continuous length conveyor strip. This coupling shall consist of a steel rod located at one end of the conveyor section extending through the side channels on each side, as shown on Figure 2, and a hook or coupling device (design not specified) at the opposite end of the conveyor section by which each section may be attached to the preceding section using the steel rod as an anchor for the coupling device. The coupling shall be so designed that conveyor sections will be completely interchangeable. Couplings shall also permit a 6 inch lateral offset in attaching the sections end to end as shown on Figure 1.

3.4.1.6 Lateral couplings. Lateral couplings consisting of necessary spacers, washers, bolts, nuts, etc., for one side rail shall be included as a part of each conveyor section.

3.4.1.7 Wheel spacers. The conveyor axles shall be equipped with wheel spacers of aluminum alloy tubing. Spacers shall not be carried through the longitudinal strengthening bars.

*3.4.1.8 Longitudinal strengthening bars. Longitudinal strengthening bars shall be fabricated from aluminum alloy material of not less than 1/8 inch thickness. The bars need not be of rectangular cross-section and shall be long enough to engage all axles when wheels are used on end axles. If rollers are used on end axles, the bars shall terminate at the end cross members. In either case, bars shall contact all cross members.

3.5 Strength.

*3.5.1 Section. The strength of a conveyor section shall be such that any portion of the working surface having a length of 1 1/2 feet (not less than 18 wheels) will support a moving (2 feet per second minimum) load of not less than 1875 pounds with no permanent deformation greater than 0.015 inch. Further, the conveyor section shall be capable of supporting a static 4500 pound proof load, by means of a distribution plate 1 1/2 feet in length, without permanent deformation greater than 0.050 inch. The strength of Styles II and III conveyor section shall also be such that any two portions of the working

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

surface having a length of 1 1/2 feet (not less than 18 wheels) each, separated by an unloaded portion having a length of not more than 5 feet, will each support the above moving and static loads with the same permanent deformation requirements. Testing shall be as specified in 4.4.2.1 and 4.4.2.2.

*3.5.2 End axles. Each end axle of the section and the wheels or rollers attached thereto shall be capable of supporting without permanent deformation greater than 0.050 inch, a 3,000 pound load acting vertically downward when tested as specified in 4.4.2.3.

*3.5.3 Deflection. The elastic deflection caused by application of the loads specified in paragraphs 3.5.1 and 3.5.2 shall not adversely affect the satisfactory performance of the conveyor section.

*3.6 Roll. The conveyor section, when utilized in a horizontal position and having 1 square foot of working surface (not less than 12 wheels) loaded with 1,500 pounds, shall require an applied force of not more than 100 pounds to start the load rolling at any temperature down to -65° F.

3.7 Weight. The weight of the conveyor section shall not exceed 40 pounds for Style I, 65 pounds for Style II and 80 pounds for Style III.

3.8 Performance. The conveyor shall be capable of meeting the tests specified in Section 4.

3.9 Dimensions. The sections shall have an overall width of 12 inches, a nominal length of 48 inches for Style I, 96 inches for Style II and 120 inches for Style III (excluding end couplings) and the overall height shall be not less than 3 5/8 nor more than 3 3/4 inches. When conveyor sections are connected end to end, the longitudinal spacing of coupling rod centers shall be 48 inches ± 1/4 inch for Style I, 96 inches ± 1/4 inch for Style II, and 120 inches ± 1/4 inch for Style III. Dimensions and tolerances not specified shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the conveyor, and attachment of buffer strips, lateral couplings, etc., and assembly of several sections in multiple or tandem arrangement, they shall be limited accordingly.

*3.10 Finishes and protective coatings.

3.10.1 Aluminum alloy parts. Aluminum alloy parts shall be finished in accordance with Finish Code F-301HL of MIL-STD-808. If 5052 or 6061 aluminum alloys are used, no finish is required.

*3.10.2 Plating. Wheels, rollers (if furnished), axles, and other steel parts shall be cadmium or zinc plated in accordance with Class 2, Type II of QQ-P-416 or QQ-Z-325 except that plating thickness shall be not less than 0.00030 inch.

3.11 Marking for identification. Conveyor sections shall be marked in accordance with MIL-STD-130.

3.12 Workmanship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*3.12.1 General. The conveyor, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of marking of parts and assemblies, welding, riveting, machine screw assemblies and freedom of parts from burrs and sharp edges.

*3.12.2 Dimensions. Dimensions and tolerances not specified, shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the conveyor, and attachment of buffer strips, lateral couplings, etc. and assembly of several sections in multiple or tandem arrangement, they shall be limited accordingly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Component and material-inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards.

*4.2 Classification of inspection. Inspection shall be classified as follows:

a. Preproduction inspection
b. Quality conformance inspection.

*4.2.1 Preproduction inspection. Unless otherwise specified (see 6.2), preproduction inspection shall be applied to two conveyor sections of each style. Failure of the preproduction samples to pass the examination or one or more preproduction tests shall be cause for rejection. Unless otherwise specified (see 6.2), preproduction inspection shall consist of the examination in 4.3 and all tests in 4.4.

*4.2.2 Quality conformance inspection. Quality conformance inspection shall be applied to conveyors prior to being offered for acceptance under the contract. Failure of the sample conveyor to pass the examination or one or more tests shall be cause for rejection of the end item. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the following:

a. Examination and testing (4.3).
b. Inspection of preservation, packaging, packing and marking for shipment and storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*4.3 Examination. The conveyor sections shall be examined for design, construction, materials, components and workmanship to determine compliance with the requirements of this specification.

*4.3.1 Sampling plan for examination of end items. Sampling for examination and acceptance of end items shall be in accordance with MIL-STD-105 except as otherwise indicated.

4.3.1.1 Examination of the end item.

*4.3.1.1.1 Visual examination. Visual examination shall be in accordance with the classification of defects set forth below.

EXAMINE	DEFECTS	MAJOR	MINOR
Design and Construction	Material not as specified	X	
	Design not as specified	X	
	Component missing or damaged	X	
	Component not interchangeable	X	
Protective Coating	May crack, chip or scale		X
Weight	In excess of that specified		X
Color	Not as specified		X
Plating	Bare Spots, not adherent, not clean or uniform		X
Marking for Identification	Illegible, incorrect or missing		X
Workmanship	Any defect that may affect interchangeability, operation or performance	X	

4.3.1.1.2 Dimensional examination. Examination shall be made of conveyors for compliance with dimensions specified. Any deviation from specified tolerances shall constitute a defect.

*4.3.1.1.3 Inspection level and AQLs. The acceptable quality levels expressed in defects per hundred units and the inspection levels shall be as follows:

	INSPECTION LEVEL	AQLs MAJOR	AQLs MINOR
For 4.3.1.1.1	II	2.5	4.0
For 4.3.1.1.2	S-4		4.0

*4.3.2 Testing of the end item. Testing shall be in accordance with Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

TABLE I

CHARACTERISTICS	REQUIREMENT PARA	TEST METHOD	AQL (DHU)	INSPECTION LEVEL
High Temperature (Preproduction Test only)	4.4.3.2	MIL-STD-810 Proc I	Pass or Fail	
Low Temperature (Preproduction, Test only)	4.4.3.1	MIL-STD-810 Proc I	Pass or Fail	
Moving Load	3.5.1	4.4.2.1	10.0	S-2
Section Proof Loads	3.5.1	4.4.2.2	10.0	S-2
End Axle Proof Load	3.5.2	4.4.2.3	10.0	S-2

4.4 Tests.

4.4.1 Test conditions. Unless otherwise specified, the load distributing plate shall consist of a sheet of 3/4 inch plywood of the specified length and width, faced with 0.064 inch of 2024T-6 aluminum alloy sheet on the surface used in contact with the conveyor wheels.

*4.4.1.1 Permanent deformation measurement. Permanent deformation of axles and cross members shall be considered the difference between measurements taken before application and after removal of test load. Measurements shall be taken vertically, midway between siderails and shall be made using instrumentation having accuracy within 0.001 inch.

4.4.2 Functional tests.

*4.4.2.1 Moving load. Test setup shall be in accordance with 4.4.2.2 except that each test load shall weigh 1875 pounds and shall be rolled at not less than 2 feet per second from one end of conveyor sections to the other. Rolling load shall cause no permanent deformation to axles or other components and no visible damage to rollers or their bearings. Moving load test shall be accomplished before beginning the section proof load and the end axle proof load tests.

*4.4.2.2 Section proof loads. The two conveyor sections shall be secured together end-to-end and placed in a horizontal position with the side rails resting on a flat rigid surface. The Style I sections shall sustain a static proof load of 4,500 pounds, applied to the wheels by means of a distributing plate having a width of 12 inches and a length of 18 inches. The load shall be gradually applied to the conveyor. Further, the load shall be removed,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

moved down the conveyor 18 inches and reapplied to the conveyor. This shall be repeated until the full length of the two sections have been subjected to the static proof load. Permanent deformation of axles, or any other components, in excess of 0.050 inch shall be cause for rejection. The static proof load for styles II and III conveyors shall consist of two equal size (12 inches by 18 inches) distributing plates loaded with 4,500 pounds each and shall be placed on the conveyor sections at a distance of 5 feet apart (inside to inside of distributing plates). The load shall be removed, moved down the conveyor 18 inches and reapplied to the conveyor. This shall be repeated until the full length of the two sections have been subjected to the static proof load. Permanent deformation of axles, or any other components, in excess of 0.050 inch shall be cause for rejection.

*4.4.2.3 End axle proofload. A load of 3,000 pounds acting vertically downward shall be applied singularly to each end axle through a distributing plate resting only on the wheels or roller of the end axle. No permanent deformation in excess of 0.050 inch, or fracture, shall result from such load.

4.4.3 Environmental test.

*4.4.3.1 Low temperature. The conveyor shall be tested at low temperature in accordance with procedure I of MIL-STD-810. While still at the specified temperature, it shall require a force of no more than 100 pounds to move a load of 1,500 pounds distributed over 1 square foot of working surface (not less than 12 wheels) by means of a distributing plate.

*4.4.3.2 High temperature. A section of not less than two feet of the conveyor shall be tested at high temperature in accordance with procedure I of MIL-STD-810. At the completion of the high temperature test, the conveyor shall be removed from the test chamber and cooled to ambient temperature. A load of 125 pounds shall be applied radially to each of five wheels selected at random from the section. The wheels shall be rotated at a speed of 1400 rpm by means of a suitable power source for a period of 15 seconds. At the end of the 15 seconds, the rotation of the wheel shall be stopped and a 3 minute rest period allowed for cooling the wheel bearing. This duty cycle of 15 seconds rotation and 3 minutes rest shall be repeated for 8 hours. The time required to accelerate the wheel from rest to 1400 rpm shall be deducted from the rest periods. No binding or locking of the conveyor wheel shall occur during this 8 hour test.

*4.5 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of the applicable specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS
Marking, (exterior and interior)	Omitted, incorrect, illegible of improper size, location sequence or method of application
Materials	Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling; bulging or distortion of containers
Weight or content	Number of intermediate packages is more or less than required; gross/net weight exceeds requirements.
Preservation	Preservation improper, improperly applied, or missing.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. The preservation and packaging shall be Level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly and matchmarking. Disassembly shall be the minimum necessary to safeguard parts known to be subject to damage, loss or breakage in transit. Bolts, nuts, screws, pins, washers and other attaching parts removed shall be reinstalled in one of the mating parts and secured to prevent their loss. When necessary to facilitate reassembly, parts removed and mating parts shall be matchmarked. Matchmarking shall be printed on shipping tags conforming to UU-T-81, Type A. The printed tags shall be waterproofed in accordance with MIL-STD-129.

5.1.1.2 Cleaning and drying. Prior to the application of preservatives or paint, the surfaces involved shall be cleaned in accordance with process C-1 (any applicable process) of MIL-P-116 and dried by the most applicable procedures specified herein. Processes and procedures used shall accomplish thorough cleaning and drying without damage to any part.

*5.1.1.3 Preservation application and unit packaging. The conveyors and attachments shall be preserved and packaged in accordance with Method I of MIL-STD-116.

*5.1.2 Level C. The conveyors and attachments shall be preserved and packaged to afford protection against corrosion, deterioration, physical and mechanical damage during shipment to the first receiving activity. The supplier may use his own practice provided it fulfills these requirements.

5.2 Packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

*5.2.1 Level A. Unless otherwise specified (see 6.2), the conveyors and attachments shall be packed in shipping containers conforming to Type II, Style B of PPP-C-650. Anchoring of contents, waterproofing, closure and strapping of the crate shall be in accordance with the Appendix to the crate specification.

5.2.2 Level C. The conveyors and attachments shall be packed to insure carrier acceptance and safe delivery to destination in compliance with ~~Official Classification Committee, Uniform Freight Classification Rules,~~ or American Trucking Association, National Motor Freight Classification Rules, or with other carrier rules and regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, bundles and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The conveyors covered by this specification are intended for use to provide a means of ejecting vehicles and other cargo from aircraft during flight.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, date and number of this specification
b. Style required (see 1.2)
c. Preproduction inspection, if different (see 4.2.1)
d. Quality conformance inspection, if different (see 4.2.2)
e. Level of preservation, packaging, and packing required (5.1 and 5.2.1)

6.3 Notations. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modification, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

ARMY - ME
NAVY - AS
AIR FORCE - 84

Reviewer:

NAVY - SA
DSA - CS

Preparing Activity:

Air Force - 84

Project Number:

3910-0043

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

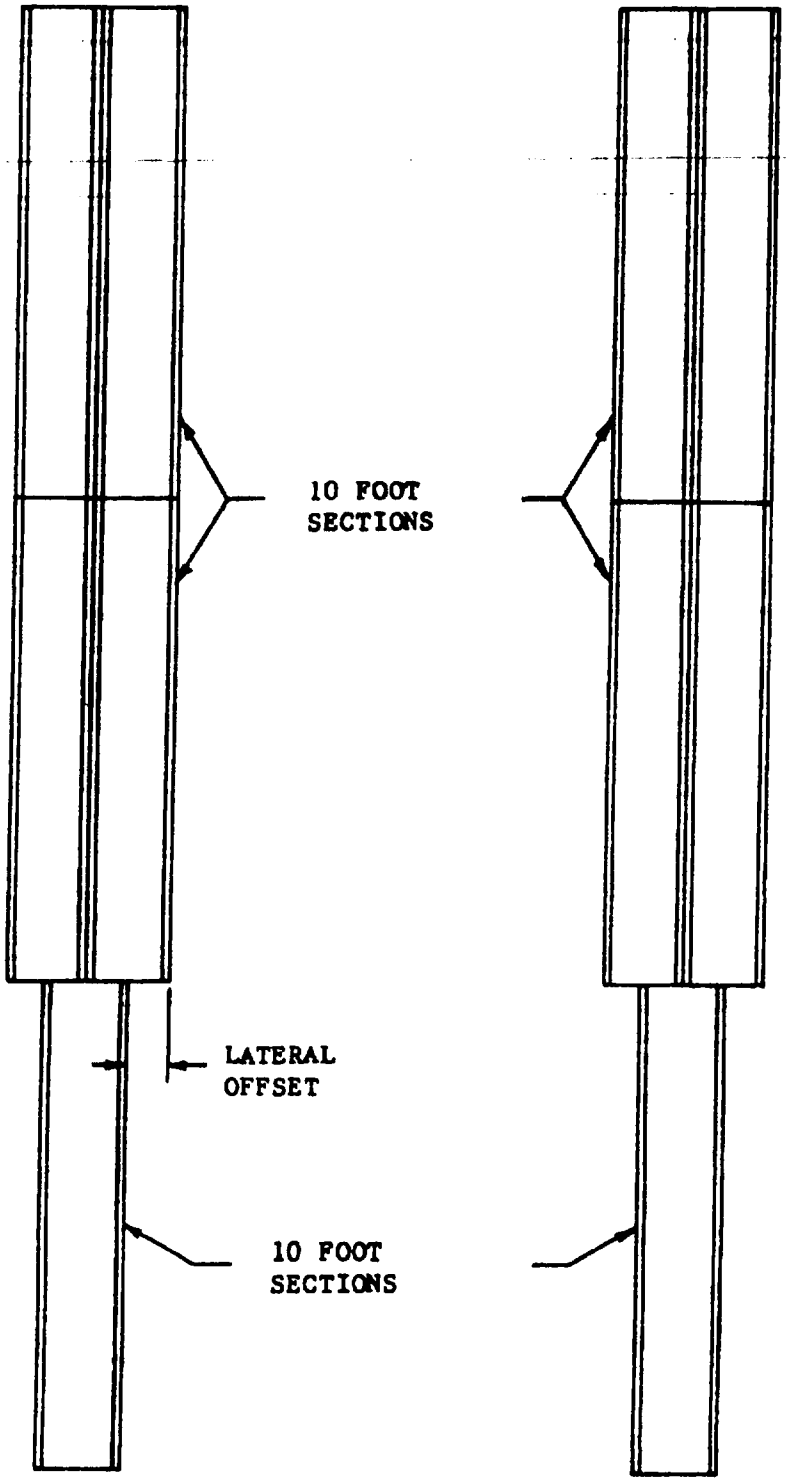


FIGURE 1 (Sheet 1). Typical airplane installation

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.


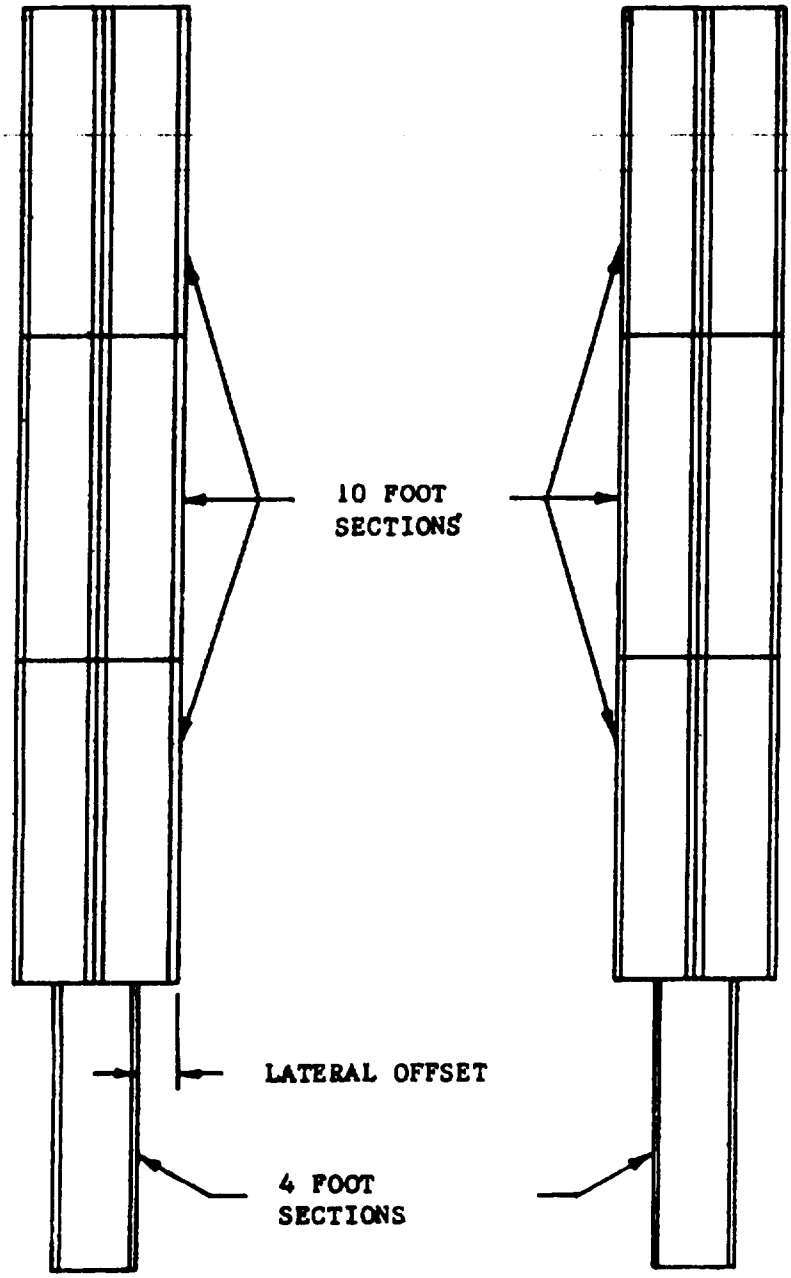


FIGURE 1 (Sheet 2). Typical airplane installation.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

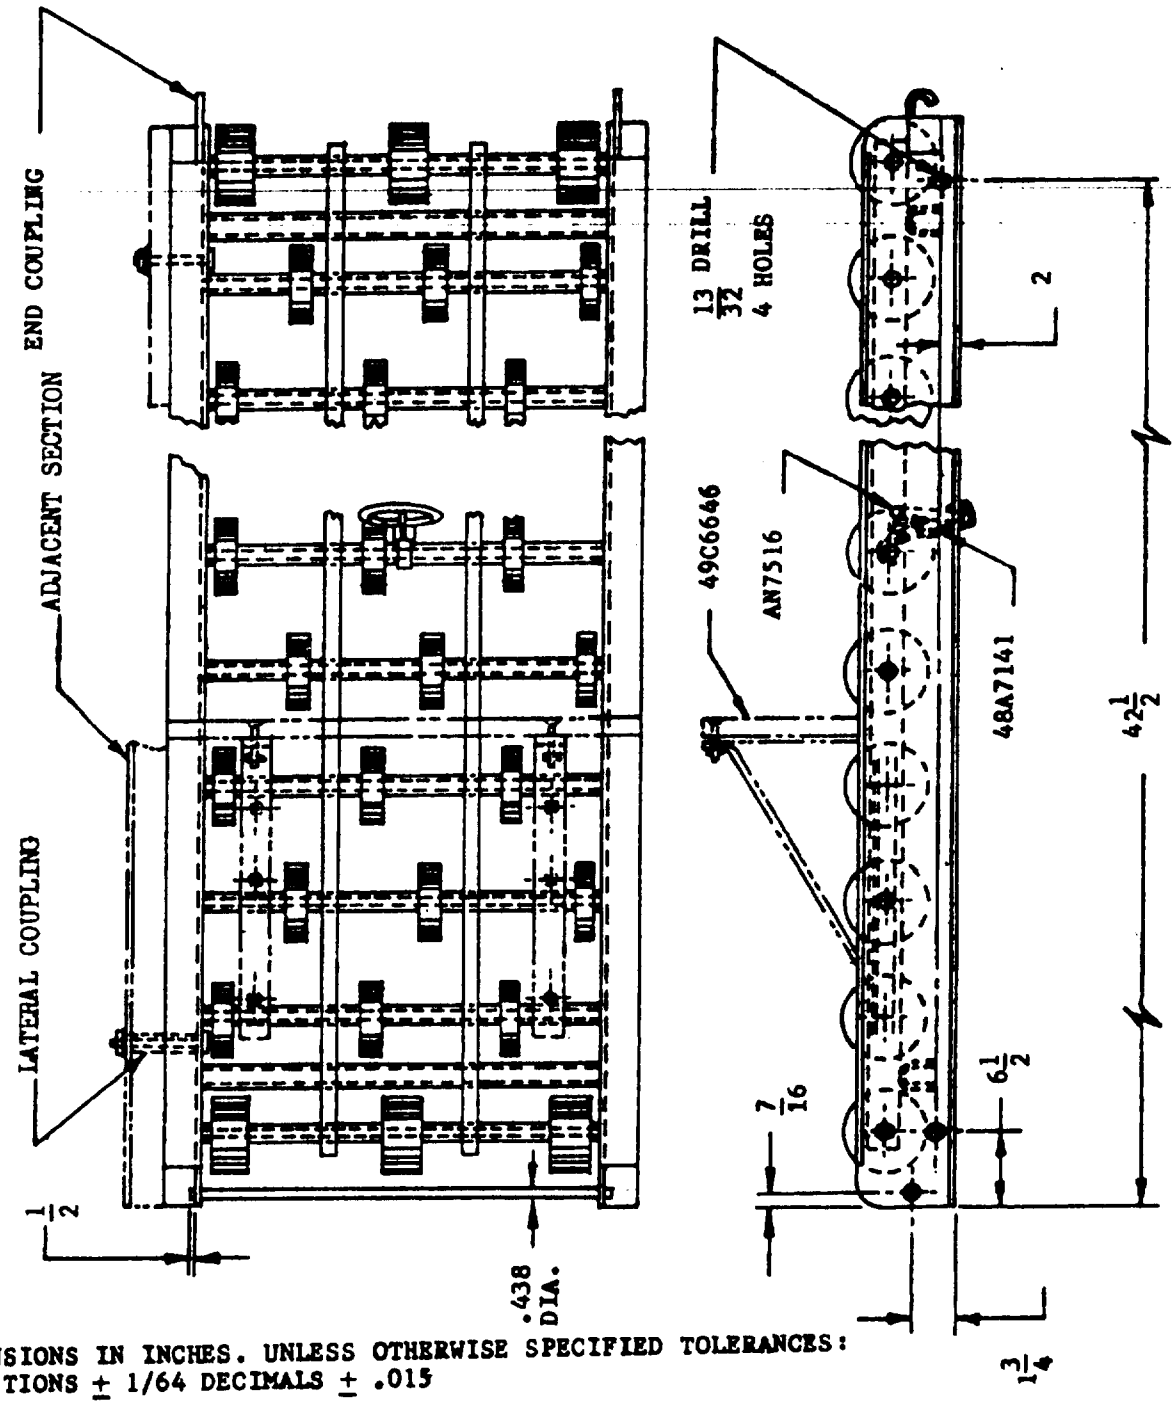

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES:
FRANCTIONS ± 1/64 DECIMALS ± .015

FIGURE 2(Sheet 1). Typical conveyor section


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

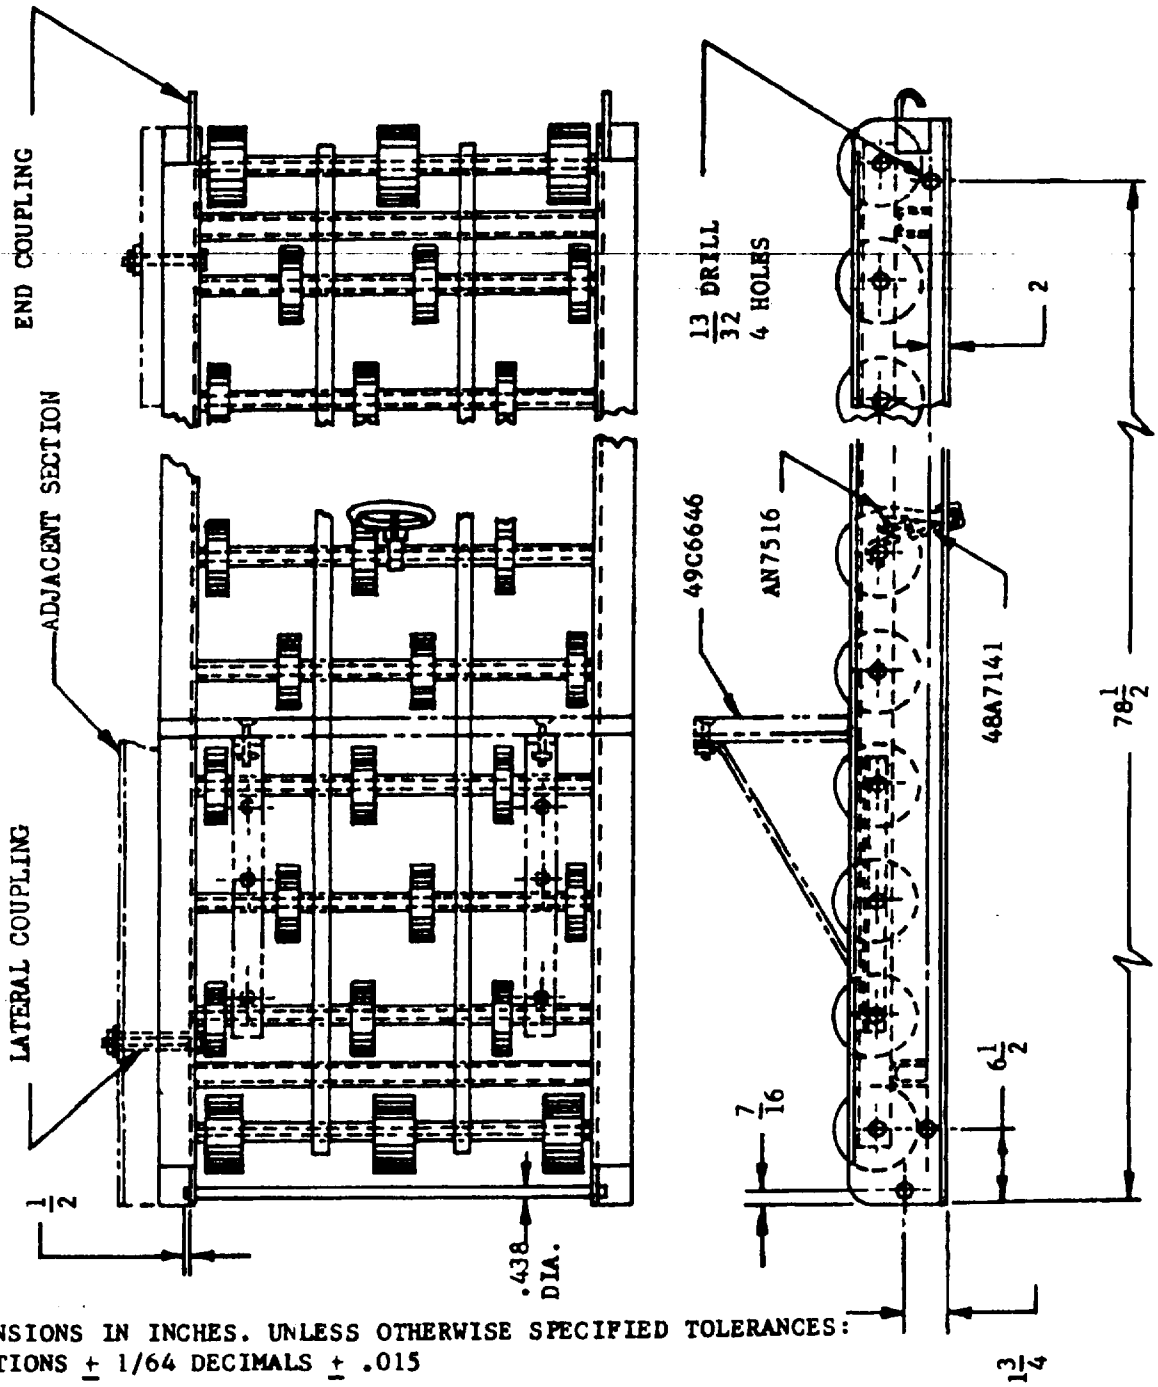

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES:
FRACTIONS ± 1/64 DECIMALS ± .015

FIGURE 2 (Sheet 2). Typical conveyor section

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

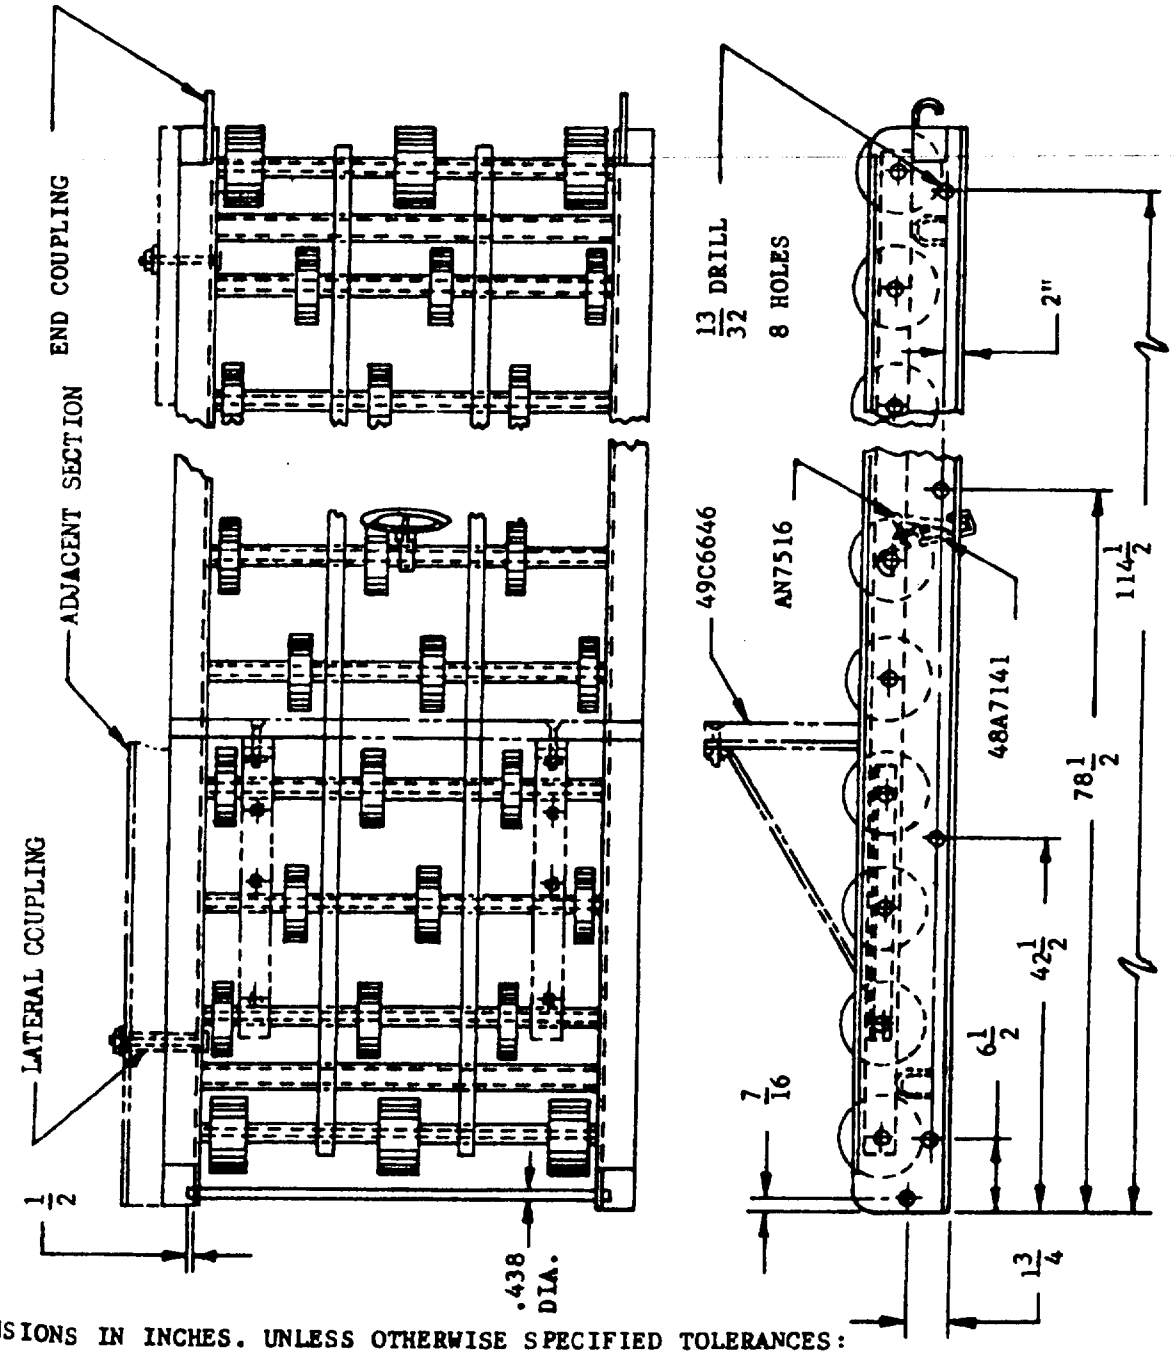

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES:
FRACTIONS ± 1/64 DECIMALS ± .015

FIGURE 2 (Sheet 3) Typical conveyor section

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Military Specification MIL-C-5927D Conveyors, Wheel, Gravity, Extraction Kit

ORGANIZATION	CITY AND STATE
WRAMA (WRNEMV)	ROBINS AFB GA.

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4063, WHICH IS OBSOLETE. AFLC RAFB,GA JUN 67 - 500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE

WRAMA (WRNEMV)
ROBINS AFB GA.

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

WRAMA (WRNEMV)
ROBINS AFB GA. 31093

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:58Z
Check the source to verify that this is the current version before use.