MIL-P-5722B(USAF)
30 April 1956
Superseding
MIL-P-5722A(USAF)
20 Jan 1956

MILITARY SPECIFICATION

PRESSURIZING KIT MK-65/AP

1. SCOPE

1.1 This specification covers one type of pressurizing kit, designated MK-65/AP.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-591	Boxes, Fiberboard, Wood-Cleated (For Domestic Shipment)
NN-B-621	Boxes, Wood, Nailed and Lock-Corner
LLL-B-631	Boxes; Fiber Corrugated (For Domestic Shipment)
LLL-B-636	Boxes; Fiber, Solid, (For Domestic Shipment)
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-585	Boxes; Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-676	Boxes, Set-Up, Paperboard

Military

JAN-S-23	Switches, Toggle (For Electronic and Communications Use)
MIL-W-76	Wire and Cable, Hook-Up, Electrical, Insulated
JAN-P-100	Packaging and Packing For Overseas Shipment, General Specification
JAN-P-103	Packaging and Packing for Overseas Shipment Boxes; Wood Cleated; Solid Fiberboard
JAN-P-106	Boxes; Wood, Nailed (Overseas Type)
JAN-P-108	Boxes, Fiberboard, Corrugated and Solid (Military Type)
MIL-P-116	Preservation, Methods Of
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

JAN-P-127	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive Water-Resistant
MIL-B-130	Barrier-Material, Paper Noncorrosive
MIL-B-138	Boxes, Wood, Fiberboard-Lined For Overseas Shipment (For Weight Contents Not Exceeding 500 Pounds)
MIL-A-148	Aluminum Foil
MIL-P-4185	Paper, Tissue, Wrapping
MIL-B-4229	Boxes; Paperboard, Metal-Stayed
MIL-W-5086	Wire, Electrical, 600-Volt, Copper, Aircraft
MIL-H-5593	Hose; Aircraft, Low-Pressure, Flexible
MIL-I-6181	Interference Limits, Tests And Design Requirements, Aircraft Electrical And Electronic Equipment
MIL-V-6618	Valve, Stop Check, Purge, Manifold Pressure Gage Line
MIL-F-8190	Gage, Absolute Pressure, Dial Indicating, Air, 15-45 Inch Mercury Range, Type MA-1
MIL-P-9388	Pump, Pressure, Oil-Free Air Type MA-2
MIL-D-9394	Dehydrator, Desiccant, HD-186/ASQ
MIL-S-9395	Switch Pressure SA-377/ASQ
MIL-B-10377	Box, Wood, Cleated, Veneer, Paper Overlaid
MIL-L-10547	Liners, Case, Waterproof

STANDARDS

Military

MIL-STD-129	Marking For Shipment And Storage

AIR FORCE-NAVY AERONAUTICAL

AN3028	Guard, Toggle Switch, Two Position
AND10050	Bosses, Standard Dimensions For Gasket Seal Straight Thread
AND10061	Tubing End - Standard Dimensions For Flared

DRAWINGS

Air Force

50D13378	Pressurizing Kit MK-65/AP - Outline Dimensions Of
52A13614	Rivet-Solid, Adapter Connector
52B13611	Shell - Adapter Connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 MATERIALS.- Materials not definitely specified herein shall be of the best commercial quality used for the purpose in commercial practice. Materials shall be free from defects and imperfections which may affect the serviceability of the finished product.

3.2 DESIGN AND CONSTRUCTION.- The pressurizing kit shall be assembled in accordance with Drawing 50D13378 and interconnected in accordance with figures 1 and 2.

3.3 HOOKUP WIRE.- Hookup wire and cables shall be in accordance with MIL-W-76 and MIL-W-5086, respectively.

3.4 AIR HOSE.- Air hose shall be of a flexible type and shall be in accordance with MIL-H-5593.

3.5 TUBING AND FLARE CONNECTIONS.- The tubing shall be aluminum alloy. Sufficient clearance shall be provided to facilitate making fitting connections and to allow for expansion and contraction. The flare of the tubing shall be accomplished in accordance with best commercial practice, and tubing flare shall conform to AND10061.

3.6 RADIO INTERFERENCE.- Radio noise generated by the pressurizing kit when assembled and operated as a system at rated load, with or without a suitable filter, shall be in accordance with the limits specified in MIL-I-6181.


3.7 FINISH.- The bracket on which the pressurizing kit components are mounted shall be finished on the outside in black wrinkle paint.

3.8 THREADS.- Threads on fittings shall be in accordance with AND10050.

3.9 GOVERNMENT-FURNISHED PROPERTY.- When provided for in the contract or purchase order, the following items shall be furnished by the Government to the contractor, upon his request, for use in fabricating the pressurizing kit:

Item No.	Item Description	Quantity
1	Pump, Pressure, Oil-Free Air Type MA-2, MIL-P-9388	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

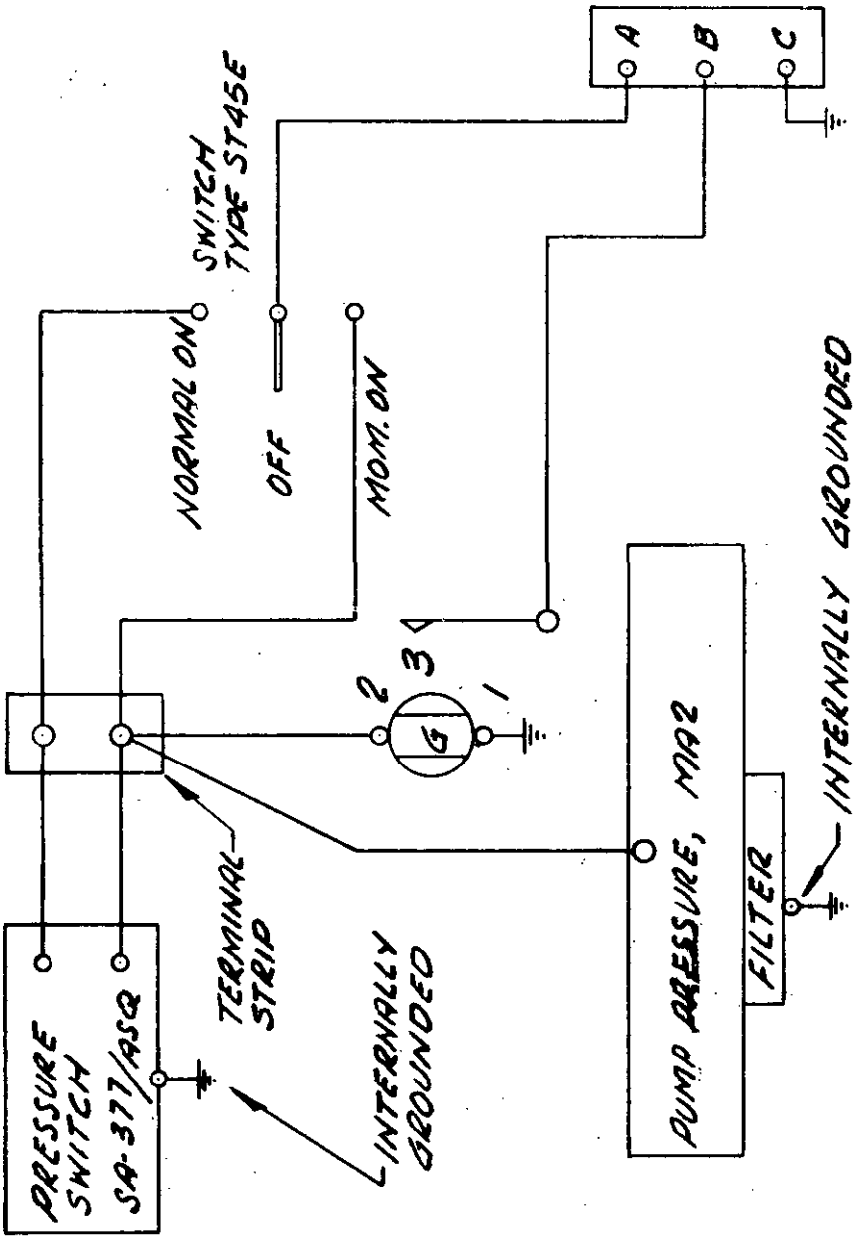

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

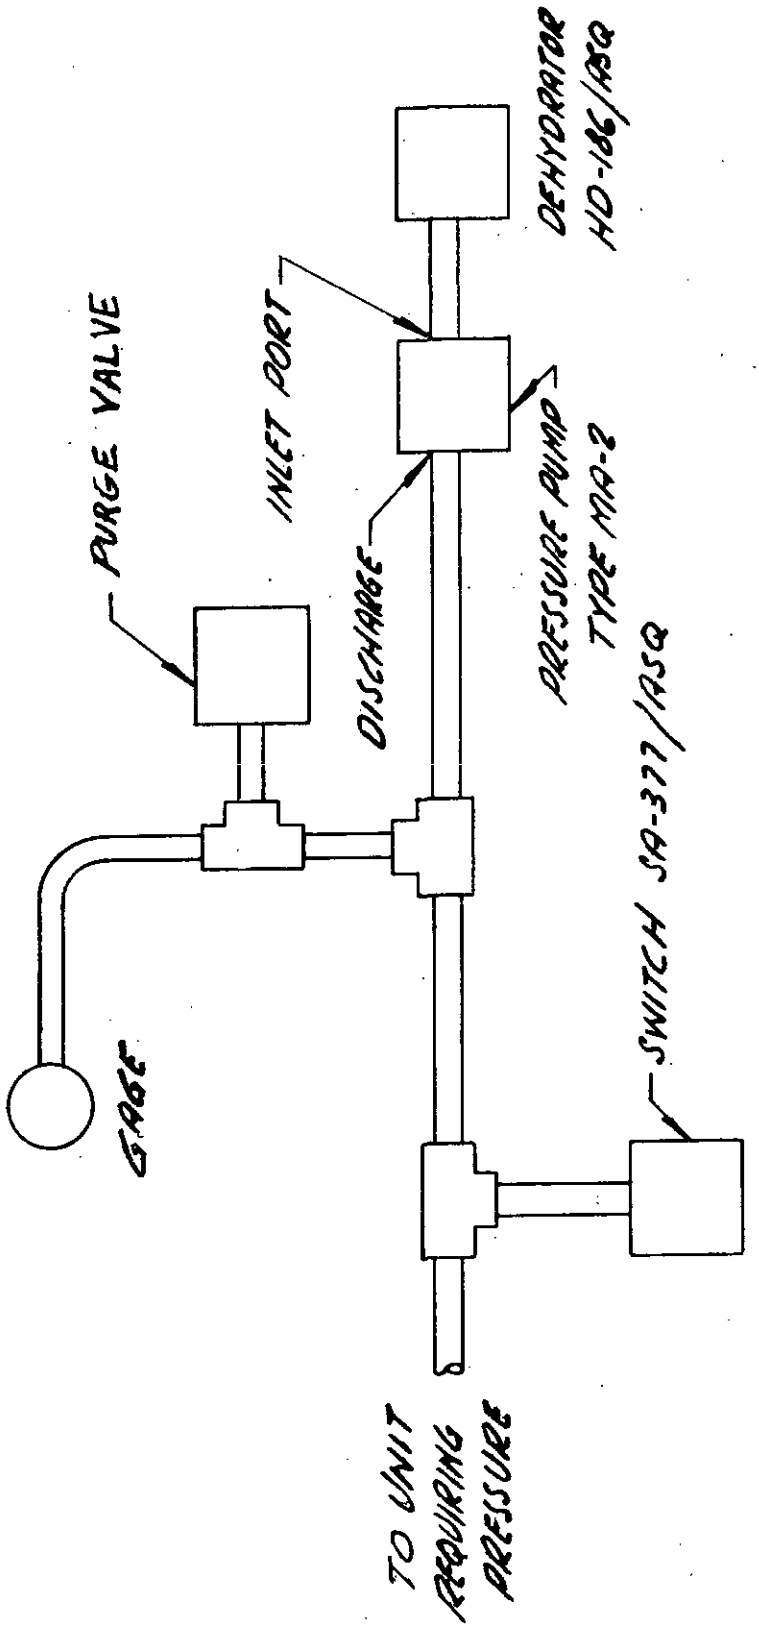


FIGURE 2

Source: https://assist.dla.mil - Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

Item No.	Item Description	Quantity
2.	Switch, Pressure, Type SA-377/ASQ, MIL-S-9395	1
3.	Dehydrator, HD-186/ASQ, MIL-D-9394	1
4.	Gage, Pressure, Type MA-1, MIL-G-8190	1
5.	Valve, Purge, MIL-V-6618	1
6.	Switch,Toggle, Type ST45E, JAN-S-23	1
7.	Guard, Switch, AN3028	1
8.	Shield - Dial Control Panel, 52B13611	1
9.	Disc - Control Panel, 52A13614	1

3.10 WORKMANSHIP.- Workmanship shall be in accordance with good commercial practice and of a sufficiently high grade to ensure proper operation and service life.

4. QUALITY ASSURANCE PROVISIONS

4.1 CLASSIFICATION OF TESTS.- The inspection and testing of the pressurizing kit shall be classified as acceptance tests.

4.2 ACCEPTANCE TESTS.- Acceptance tests shall consist of the individual tests.

4.2.1 INDIVIDUAL TESTS.- Each pressurization kit shall be subjected to the following tests as described under 4.3.

a. Examination of product

b. Overall operation tests

4.3 TEST METHODS

4.3.1 EXAMINATION OF PRODUCT.- The pressurization kit shall be examined to determine compliance with the mechanical detail, material, and workmanship requirements of this specification, as deemed necessary by the Government inspector. Such examination may be on component parts,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

subassemblies, partial assemblies or the completed part, as the mechanical simplicity or complexity of the part indicates necessary or desirable.

4.3.2 OVERALL OPERATION TESTS.- The pressurizing kit shall be subjected to the following tests in the order presented, using a bench test setup similar to that shown on figure 3.

4.3.2.1 The bleeder valve shall be opened and the pressure gage checked against room pressure.

4.3.2.2 The CALIBRATION PRESSURE arrow on the range-marker movable mask shall be set at the indicated room pressure.

4.3.2.3 Both the bleeder valve and the vacuum shutoff valve shall be closed and the switch shall be held in MOMENTARY ON position. The pressure pump shall run and the pressure-pump indicator shall light.

4.3.2.4 The switch shall be held in MOMENTARY ON position until the pressure reaches the LEAKAGE TEST ONLY arrow and then the switch shall be released. The pressure pump shall stop and the pressure-pump indicator shall go out. Leakage shall not exceed 1/4 inch Hg in 5 minutes.

4.3.2.5 After the leakage test is completed, the bleeder valve shall be opened to relieve excess pressure, and then closed.

4.3.2.6 The switch shall be placed in NORMAL ON position; the pressure pump shall not run, and the pressure-pump indicator shall not light.

4.3.2.7 The vacuum shutoff valve shall be opened and the vacuum pump shall be operated to reduce system pressure. The pressure pump shall start pumping automatically and the pressure-pump indicator shall light before the pressure drops 2-1/2 inches below the calibration pressure.

4.3.2.8 After the pressure pump starts, the vacuum pump shall be shutoff and the vacuum shutoff valve shall be closed. The pressure shall rise within 5 to 10 seconds to a point not over 2-1/2 inches above calibration pressure, at which point the pressure pump shall automatically cut off and the pressure-pump indicator shall go out.

4.3.2.9 The tests specified in 4.3.2.5 through 4.3.2.8 shall be repeated. Before the pressure reaches the automatic cutoff point, the switch shall be placed in EMERGENCY OFF position. The pressure pump shall stop and the pressure-pump indicator shall go out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

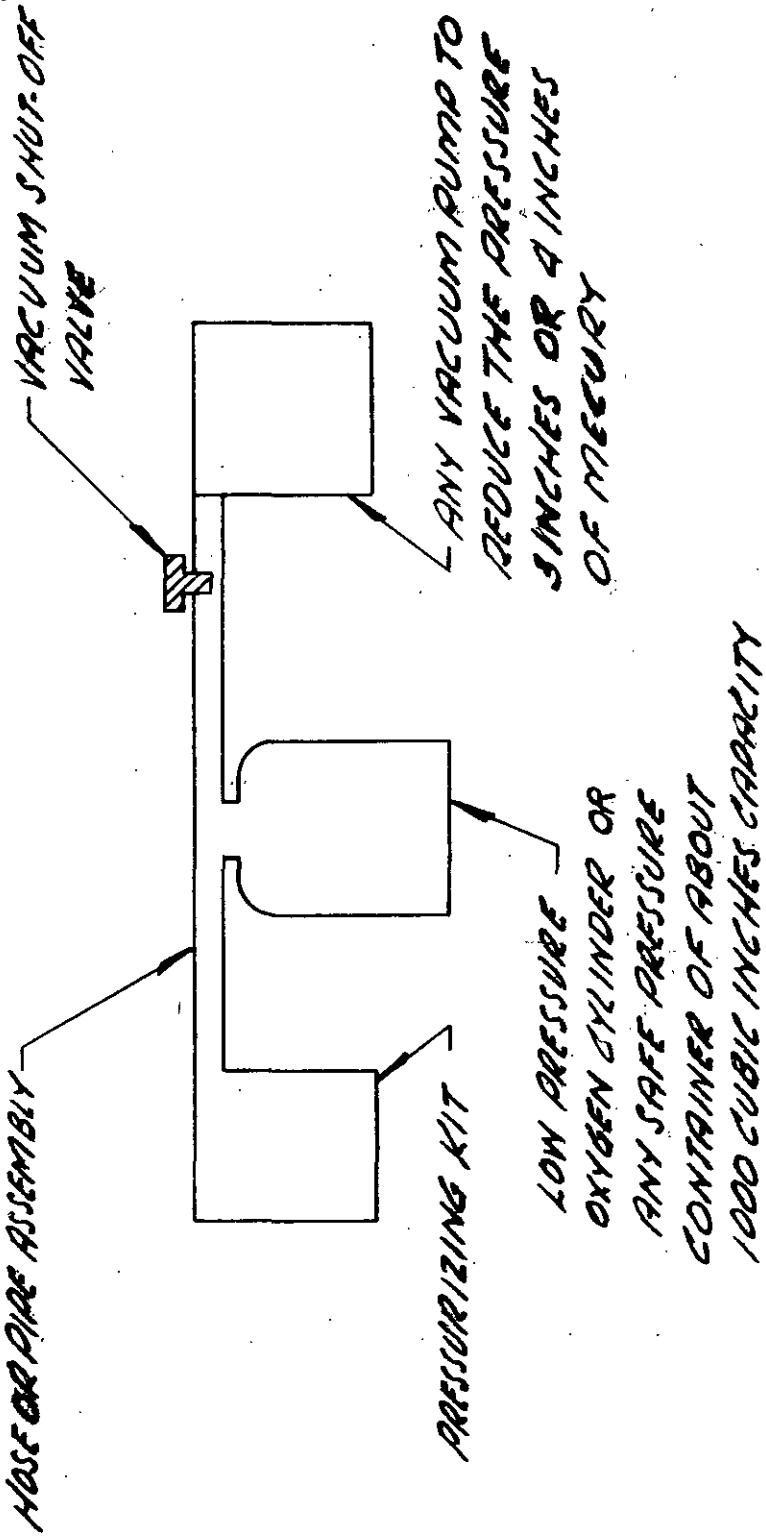


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 LEVELS OF PRESERVATION AND PACKAGING

5.1.1 LEVEL A - MILITARY PACKAGE (for overseas shipment and domestic shipment with more than 180 days storage).- The pressurizing kit shall be preserved in accordance with MIL-P-116, method II and packed in containers conforming to PPP-B-566, PPP-B-676, JAN-P-108, or MIL-B-4229. For domestic shipment, containers conforming to LLL-B-631 or LLL-B-636 may be used. Unit quantities shall be as specified by the procuring activity.

5.1.2 LEVEL B - LIMITED MILITARY PACKAGE (for domestic shipment with maximum storage of 180 days).- The pressurizing kit shall be preserved and packaged in accordance with the manufacturer's commercial practice. Unit quantities shall be as specified by the procuring activity. Packaging material in direct contact with unprotected surfaces susceptible to damage by corrosion shall conform to MIL-B-121, MIL-B-130, MIL-A-148, or MIL-P-4185.

5.1.3 LEVEL C - MINIMUM MILITARY PACKAGE (for domestic shipment with immediate use at initial destination).- The pressurizing kit shall be preserved and packaged in accordance with the manufacturer's commercial practice.

5.2 LEVELS OF PACKING

5.2.1 LEVEL A - MILITARY PACK FOR OVERSEAS SHIPMENT.- Pressurizing kits preserved and packaged as specified in 5.1.1 shall be packed in exterior-type shipping containers conforming to PPP-B-585, PPP-B-601, JAN-P-103, JAN-P-106, JAN-P-108, MIL-B-138, or MIL-B-10377. As far as practical, exterior containers shall be of uniform shape and size, of minimum cube and tare consistent with the protection required, and shall contain identical quantities. The gross weight of each pack shall be limited to approximately 200 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers shall be provided with a case liner conforming to MIL-L-10547 and shall be sealed in accordance with the appendix thereto. The case liner shall not be required when the unit, intermediate, or exterior container conforms to JAN-P-108 and is sealed at all joints and seams, including manufacturer's joint, with tape conforming to JAN-P-127.

5.2.2 LEVEL B - LIMITED MILITARY PACK FOR DOMESTIC SHIPMENT.- Pressurizing kits preserved and packaged as specified in 5.1.2 and 5.1.3 shall be packed in domestic-type exterior containers conforming to NN-B-591, NN-B-621, LLL-B-631, LLL-B-636, PPP-B-585, PPP-B-601, or MIL-B-10377. Exterior containers shall be of minimum cube and tare consistent with the protection required. As far as practical, exterior

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

containers shall be of uniform shape and size and shall contain identical quantities. The gross weight of each pack shall be limited to approximately 500 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. When fiberboard containers are used, the fiberboard shall meet the special requirements table of LLL-B-631 or LLL-B-636, as applicable.

5.2.3 LEVEL C - MINIMUM MILITARY PACK (for overseas shipment with immediate use at initial destination).- Packages which require overpacking for acceptance by the carrier shall be packed in exterior-type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall meet Consolidated Freight Classification Rules or regulations of other common carriers as applicable to the mode of transportation.

5.3 PHYSICAL PROTECTION.- Cushioning, blocking, bracing, and bolting, as required, shall be in accordance with JAN-P-100 except that for domestic shipments, waterproofing requirements for cushioning materials and containers shall be waived. The drop tests of JAN-P-100 shall be waived when preservation, packaging, and packing of the item are for immediate use or when the drop tests of MIL-P-116 are applicable.

5.4 MARKING FOR SHIPMENT.- Interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 INTENDED USE.- The MK-65/AP pressurizing kit covered by this specification is intended for use in maintaining a relatively fixed pressure in various radar sets under all altitude conditions.

6.2 ORDERING DATA.- Procurement documents should specify the following:

a. Required level of preservation, packaging, and packing (see section 5).

Patent notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:34Z
Check the source to verify that this is the current version before use.

GPO 817010