
MILITARY SPECIFICATION SHEET


RELAYS, ELECTROMECHANICAL, HERMETICALLY SEALED, 6 PDT, 5 AMPERES

Ⓖ Inactive for new design after 12 April 1988.
For new design use MS25269.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relays described herein shall consist of this specification and the latest issue of MIL-R-5757.

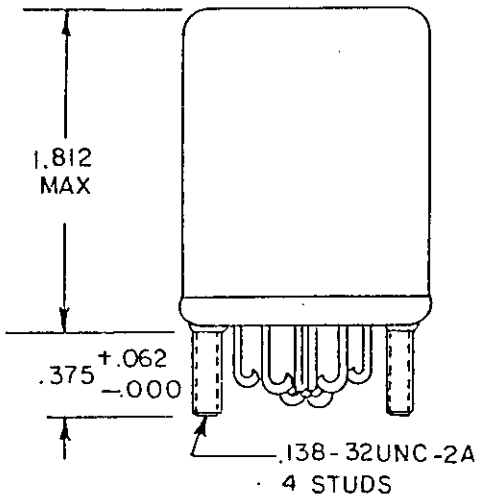


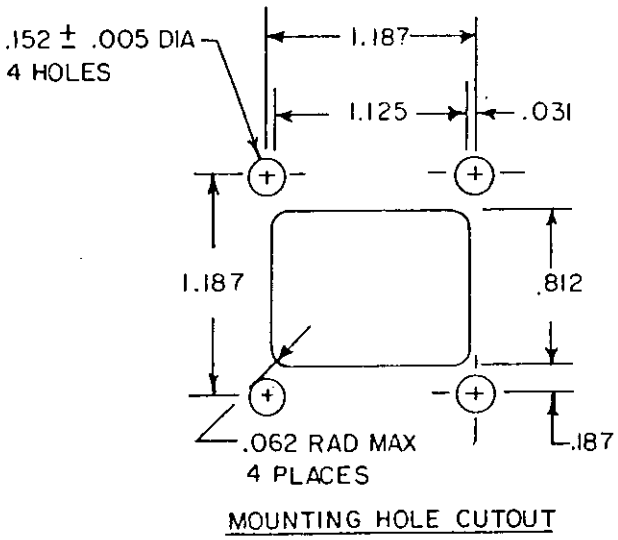

MOUNTING HOLE CUTOUT

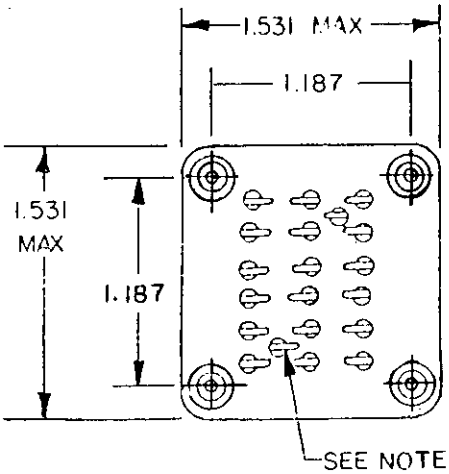

VERTICAL MOUNT SOLDER-LUG

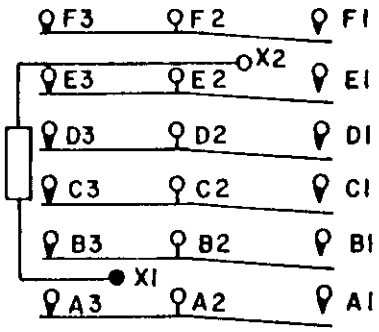

CIRCUIT DIAGRAM
UNENERGIZED POSITION

Ⓖ FIGURE 1. Dimensions and configuration.

Ⓖ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 202640-17T05:40Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.812	20.62
.031	0.79	1.125	28.58
.062	1.57	1.187	30.15
.138	3.51	1.531	38.89
.152	3.86	1.812	46.02
.187	4.75		
.375	9.53		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Shape of solder terminals optional.
5. There shall be affixed to the relay a legible circuit diagram which identifies each terminal location specified.
6. Terminal X1 shall be identified with either a contrasting glass bead or a colored dot adjacent to the terminal.

Ⓖ FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Contact data:

Configuration: 6 PDT.

Arrangement: Six form C.

Load ratings (relay case grounded):

Resistive: 5 amperes at 28 V dc.
5 amperes at 115 V, 400 Hz, single phase.

Inductive: 3 amperes at 28 V dc.
3 amperes at 115 V, 400 Hz, single phase.

Lamp: 0.8 ampere at 28 V dc.
0.8 ampere at 115 V, 400 Hz, single phase.

Minimum current: Applicable.

Contact resistance or voltage drop:

Rated life:

Before: 100 millivolts (mV) maximum.

During: 10 percent of open-circuit voltage maximum.

After: 200 mV maximum.

Minimum current:

Before: 0.05 ohm maximum.

During: 3 ohms maximum.

After: 1 ohm maximum.

Contact bounce: 2 milliseconds (ms) maximum.

Overload:

Resistive: Two times rated current.

Inductive: Two times rated current.

Ⓖ Coil data: (See table I.)

Duty rating: Continuous.

Electrical data:

Insulation resistance: 1,000 megohms minimum, except the resistance between coil and case at high temperature shall be 500 megohms or greater.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame, or enclosure and all contacts.	1,000	250 all terminals to case
Between case, frame, or enclosure and coil(s).	1,000	
Between all contacts and coil(s).	1,000	
Between open contacts in the energized and unenergized positions.	1,000	
Between contact poles.	1,000	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:40Z
Check the source to verify that this is the current version before use.

Ⓖ TABLE I. Part numbers and characteristics.

Part number M5757/16-1/	Maximum coil voltage	Rated coil voltage	Over the temperature range			Coil resistance	Maximum coil current at 25°C	Maximum operate time over temperature range	Maximum release time over temperature range	Magnetic interference	Shock	Terminals
			Pickup voltage	Hold voltage	Dropout voltage							
001	32 V dc	26.5 V dc	18 V dc	7 V dc	1.5 V dc	162 ohms min	---	25 ms	25 ms	Not applicable	Symbol 3 (100 g's)	Solder-lug
003	122 V	115 V at 400 Hz	90 V ac	30 V ac	5 V ac	---	35 milliamperes	50 ms	50 ms	Applicable	Symbol 3 (100 g's)	Solder-lug
005	122 V	115 V at 60 Hz	90 V ac	30 V ac	5 V ac	---	45 milliamperes	50 ms	50 ms	Applicable	Symbol 3 (100 g's)	Solder-lug

1/ Part numbers M5757/16-002, -004, and -006 through -010 canceled without replacement.

Environmental data:

Temperature range: Symbol B (-65°C to +125°C).

Vibration: Symbol 3 (15 g's, 10 to 2,000 Hz).

Shock: See table I.

Coil life: Not applicable.

Physical:

Terminal strength: 3 ±0.3 pound pull.

Sealed by welding: Not applicable.

Dimensions and configuration: See figure 1.

Termination: See figure 1.

Weight: 0.35 pound maximum (dc operation).
0.37 pound maximum (ac operation).

ⒼLife test requirements:

High level: 100,000 cycles at rated load.

Minimum current: Level II, 50,000 cycles.

Part number: M5757/16-(dash number from table I).

Qualification inspection and sample size: See table II.

Ⓖ TABLE II. Qualification inspection and sample size.

Single submission	Group submission	
24 units plus 1 open unit. Qualification inspection as applicable.	M5757/16-005	24 units plus 1 open unit. Qualification inspection as applicable.
	M5757/16-001 M5757/16-003	2 units each part number. Qualification inspection table, group I.

ⒼQuality conformance inspection: Performance of groups B and C tests are not applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:40Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 85

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5945-0779-02)

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:40Z
Check the source to verify that this is the current version before use.