
MIL-R-5757/3A
17 December 1968
SUPERSEDING
MIL-R-5757/3
20 September 1960


MILITARY SPECIFICATION SHEET

RELAY, ELECTROMAGNETIC, SEALED, WITH DPSTNO AND DPDT CONTACTS, 2 AMPERES

The complete requirements for procuring the relays described herein shall consist of this document and the latest issue of Specification MIL-R-5757.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

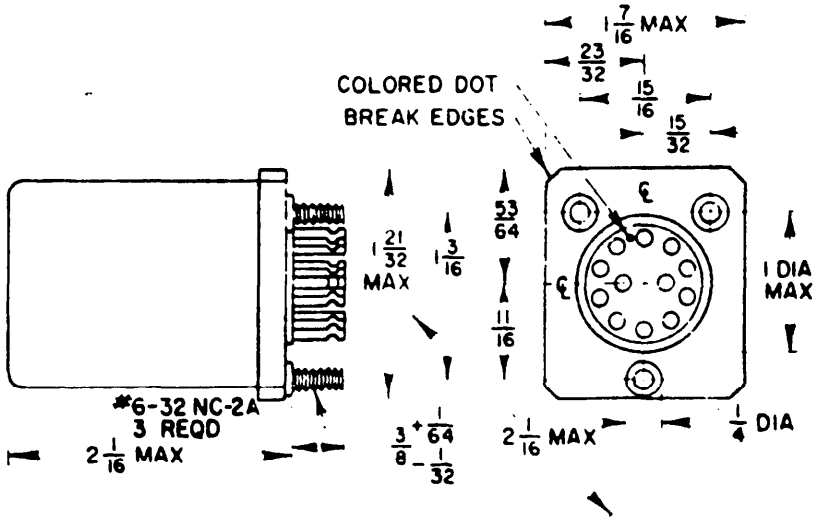



SCHEMATIC DIAGRAM

INCHES	MM	INCHES	MM
1 64	.51	53/64	21.08
1 32	.76	15/16	23.88
1 4	6.35	1 1	25.40
3 8	9.65	1- 3/16	30.23
15 32	11.94	1- 7/16	36.58
11 16	17.53	1-21/32	42.16
23 32	18.29	2- 1/16	52.32

(A) INACTIVE FOR NEW DESIGN AFTER 17 DECEMBER 1968

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±1 64 (.51 mm).
3. Terminal numbering within the schematic diagram is not required.
4. A colored line or dot shall be placed in the position shown, or optionally, the adjacent terminal in a clockwise direction around the outermost terminal circle, terminal number 1, shall have a brown or red colored bead.

(A denotes changes

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:

Configuration	DPSTNO and DPDT.
Arrangement	Two form A, two form C.
Load ratings:	
Resistive	2 amp at 50 vdc.
Inductive	Not applicable.
Motor	Not applicable.
Lamp	Not applicable.
Contact resistance:	
Before life	0.05 ohm maximum.
During life	0.10 ohm maximum.
After life	0.10 ohm maximum.

COIL DATA:

Duty rating	Continuous.
Rated voltage	6 vdc.
Maximum voltage	8 vdc.
Pickup voltage	4 vdc maximum.
Dropout voltage	Must drop out above 0.5 vdc.
Coil resistance	39 ± 3 ohms.
Contact bounce	Not applicable.

ELECTRICAL DATA:

Insulation resistance	Per MIL-R-5757.
Dielectric withstanding voltage	Per MIL-R-5757.

ENVIRONMENTAL DATA:

Shock	75 G, per method 202 of MIL-STD-202. Monitoring of closed contacts not required.
Vibration	10 G, 10 to 55 Hz, 100 microseconds maximum contact chatter.
Temperature range	-55° to +85° C.

PHYSICAL DATA:

Terminal strength	5 ± 0.5 pounds pull.
Terminal twist test	Not applicable.
Terminal solderability	Applicable; test per method 208 of MIL-STD-202.
Dimensions and configuration	See figure.
Mount	Three stud mounting (see figure).
Terminals	Solder lug, for one AWG size #14 wire.
Marking	In accordance with MIL-R-5757 except the relay shall be marked with part number in lieu of type designation. Also the supplier's name or code symbol (source coding) shall be in accordance with MIL-STD-456.

LIFE TEST REQUIREMENTS	100,000 operations per relay per MIL-R-5757.


Source: https://assist.dla.mil -- Downloaded: 20261O-17T05:38Z
Check the source to verify that this is the current version before use.

REPLACEMENT DATA:

This specification formerly covered configuration JA, identifying relay type RY3JA1A4L01.

Part number: Consists of the basic number of this specification sheet and a dash number.

Example:



Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, AT, AV, MI, MU
Navy - SH, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - SM
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

(Project 5945-0175)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:38Z
Check the source to verify that this is the current version before use.