NOTICE - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

DD FORM 672
1 OCT 52

CUSTODIANS: Ships

Procurement Specification: None

SUPERSEDES:


MILITARY STANDARD

LAMP, INCANDESCENT, T-12, MEDIUM SCREW, 3 CONTACT, ©

PROJECT 6240-N029Sh

MS15545
(SHIPS)

SHEET 1 OF 1

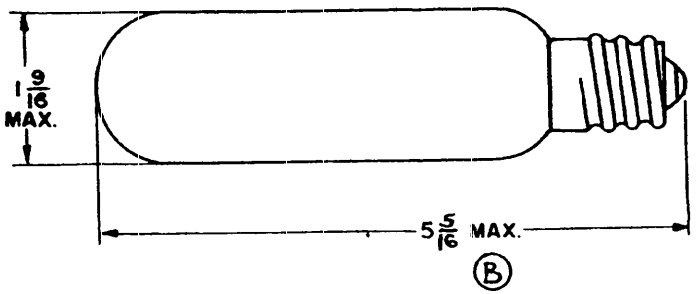

MS part number	© Finish	Watts	Volts	Filaments	Light center length (inches)✓	Hours life (approx.)	Use	Lumen output (approx.)	© Industry number
~~MS15545-1~~ ©	~~TS-121~~	~~100/100~~	~~115~~	~~C-5/C-9~~	~~3~~	~~750~~	~~Navigational light~~	~~1050~~	
MS15545-2	Clear	50/50	115	C-5/C-9	3 ± 1/8	750	Navigational light	375	50/50 T-12

✓Distance from center of light source to bottom base contact.

1. Center contact is for primary (C-5), ring contact for secondary (C-9) filaments.
2. Lamp shall burn base down only.
3. Filaments operated separately.

FED. SUP. CLASS 6240

APPROVED 2 AUG 1954 REVISED (B) 19 DEC 1958 © 15 JAN 1962

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.